

## TL431L

## LINEAR INTEGRATED CIRCUIT


PROGRAMMABLE PRECISION  
REFERENCE

## ■ DESCRIPTION

The UTC **TL431L** is a three-terminal adjustable regulator with a guaranteed thermal stability over applicable temperature ranges. The output voltage may be set to any value between  $V_{REF}$  (approximately 2.5V) and 20V with two external resistors. It provides very wide applications, including shunt regulator, series regulator, switching regulator, voltage reference and others.

## ■ FEATURES

- \*Programmable Output Voltage to 20V.
- \*Low Dynamic Output Impedance  $0.2\Omega$ .
- \*Sink Current Capability of  $1.0 \sim 100\text{mA}$ .
- \*Equivalent full-Range Temperature Coefficient of  $50\text{ppm}/^{\circ}\text{C}$  Typical for Operation over full Rated Operating Temperature Range.

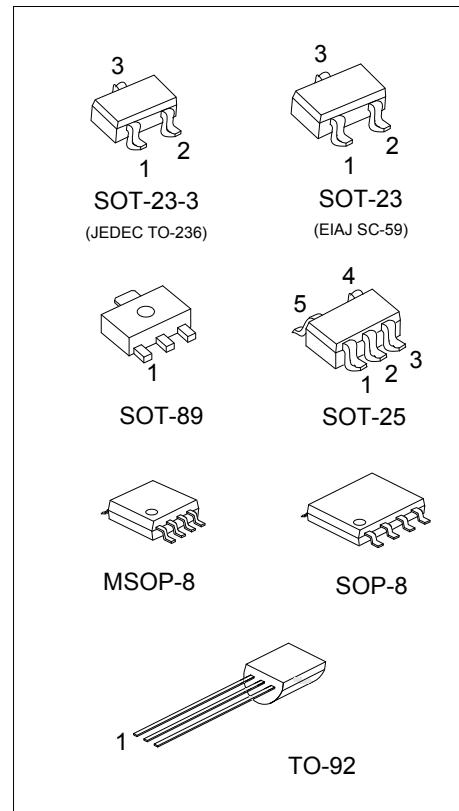








## ■ ORDERING INFORMATION

| Ordering Number |                 | Package  | Pin Assignment |   |   |   |   |   |   |   | Packing   |
|-----------------|-----------------|----------|----------------|---|---|---|---|---|---|---|-----------|
| Lead Free       | Halogen Free    |          | 1              | 2 | 3 | 4 | 5 | 6 | 7 | 8 |           |
| TL431LK-AB3-R   | TL431LG-AB3-R   | SOT-89   | R              | A | K | - | - | - | - | - | Tape Reel |
| TL431LK-AE2-R   | TL431LG-AE2-R   | SOT-23-3 | R              | K | A | - | - | - | - | - | Tape Reel |
| -               | TL431KRA-AE2-R  | SOT-23-3 | K              | R | A | - | - | - | - | - | Tape Reel |
| TL431LK-AE3-R   | TL431LG-AE3-R   | SOT-23   | R              | K | A | - | - | - | - | - | Tape Reel |
| -               | TL431KRA-AE3-R  | SOT-23   | K              | R | A | - | - | - | - | - | Tape Reel |
| TL431LK-AF5-R   | TL431LG-AF5-R   | SOT-25   | X              | X | K | R | A | - | - | - | Tape Reel |
| TL431LK-AF5-C-R | TL431LG-AF5-C-R | SOT-25   | R              | A | K | X | X | - | - | - | Tape Reel |
| TL431LK-S08-R   | TL431LG-S08-R   | SOP-8    | K              | A | A | X | X | A | A | R | Tape Reel |
| TL431LK-S08-T   | TL431LG-S08-T   | SOP-8    | K              | A | A | X | X | A | A | R | Tube      |
| TL431LK-SM1-R   | TL431LG-SM1-R   | MSOP-8   | K              | X | X | X | A | X | R |   | Tape Reel |
| TL431LK-SM1-T   | TL431LG-SM1-T   | MSOP-8   | K              | X | X | X | A | X | R |   | Tube      |
| TL431LK-T92-B   | TL431LG-T92-B   | TO-92    | R              | A | K | - | - | - | - | - | Tape Box  |
| TL431LK-T92-K   | TL431LG-T92-K   | TO-92    | R              | A | K | - | - | - | - | - | Bulk      |
| TL431LK-T92-R   | TL431LG-T92-R   | TO-92    | R              | A | K | - | - | - | - | - | Tape Reel |


Note: Pin Code: R: Reference A: Anode K: Cathode X: No Connection

|   |  |
|---|--|
| <br>(1)Packing Type<br>(2)Pin Assignment<br>(3)Package Type<br>(4)Green Package | (1) B: Tape Box, K: Bulk, R: Tape Reel, T: Tube<br>(2) refer to Pin Assignment<br>(3) AB3: SOT-89, AE2: SOT-23-3, AE3: SOT-23,<br>AF5: SOT-25, S08: SOP-8, SM1: MSOP-8,<br>T92: TO-92<br>(4) G: Halogen Free and Lead Free, K: Lead Free |
|   |  |
|   |  |
|   |  |

■ MARKING

| PACKAGE                        | MARKING  | PACKAGE                          | MARKING   |
|--------------------------------|--|----------------------------------|---|
| SOT-23-3<br>SOT-23<br>(TL431L) |   | SOT-23-3<br>SOT-23<br>(TL431KRA) |  |
| SOT-89                         |   | SOP-8<br>MSOP-8                  |  |
| SOT-25                         |   | SOT-25<br>(Pin C)                |  |
| TO-92                          |  |                                  |   |

■ BLOCK DIAGRAM

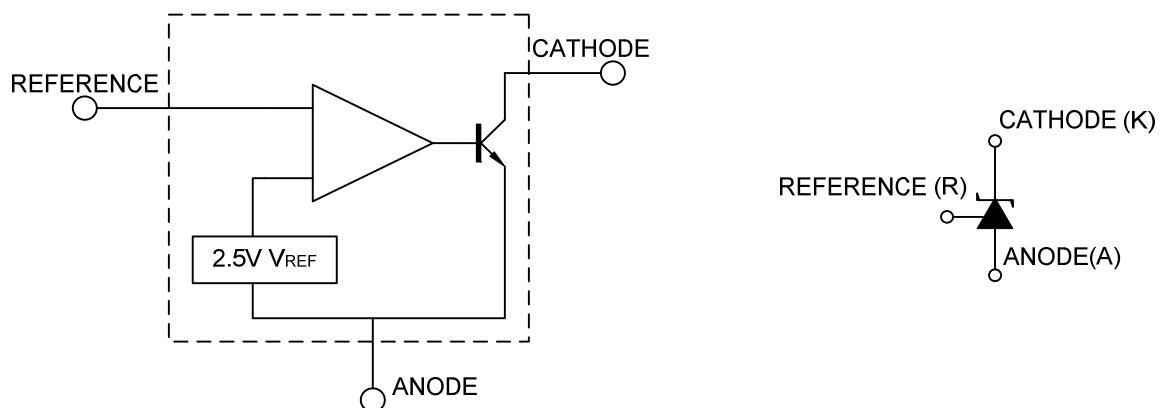

■ ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

| PARAMETER                          | SYMBOL    | RATINGS     | UNIT |
|------------------------------------|-----------|-------------|------|
| Cathode Voltage                    | $V_{KA}$  | 20          | V    |
| Cathode Current Range (Continuous) | $I_{KA}$  | -100 ~ +150 | mA   |
| Reference Input Current            | $I_{REF}$ | -0.05 ~ +10 | mA   |
| Junction Temperature               | $T_J$     | +150        | °C   |
| Operating Temperature              | $T_{OPR}$ | -40 ~ +85   | °C   |
| Storage Temperature                | $T_{STG}$ | -65 ~ +150  | °C   |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS




| PARAMETER       | SYMBOL   | MIN       | TYP | MAX | UNIT |
|-----------------|----------|-----------|-----|-----|------|
| Cathode Voltage | $V_{KA}$ | $V_{REF}$ |     | 20  | V    |
| Cathode Current | $I_{KA}$ | 1         |     | 100 | mA   |

■ ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ , unless otherwise specified)


| PARAMETER   | SYMBOL                         | TEST CONDITIONS   |  | MIN   | TYP  | MAX   | UNIT          |
|---|--------------------------------|---|--|-------|------|-------|---------------|
| Reference Input Voltage   | $V_{REF}$                      | $V_{KA}=V_{REF}$ ,<br>$I_{KA}=10\text{mA}$  | TL431L-A( $\pm 0.5\%$ )                    | 2.487 | 2.50 | 2.512 | V             |
|   |                                |   | TL431L-1( $\pm 1\%$ )                      | 2.475 | 2.50 | 2.525 | V             |
|   |                                |   | TL431L-2(+2%)                              | 2.525 |      | 2.550 | V             |
|   |                                |   | TL431L-3(-2%)                              | 2.450 |      | 2.475 | V             |
| Deviation of Reference Input Voltage Over temperature (note 1)              | $\Delta V_{REF}/\Delta T$      | $V_{KA}=V_{REF}$ , $I_{KA}=10\text{mA}$<br>$0 \leq T_A \leq 70$                               |  |       | 4.5  | 17    | mV            |
| Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage | $\Delta V_{REF}/\Delta V_{KA}$ | $I_{KA}=10\text{mA}$  | $\Delta V_{KA}=10\text{V} \sim V_{REF}$    |       | -1.0 | -2.7  | mV/V          |
|   |                                |   | $\Delta V_{KA}=20\text{V} \sim 10\text{V}$ |       | -0.5 | -2.0  |               |
| Reference Input Current   | $I_{REF}$                      | $I_{KA}=10\text{mA}$ , $R_1=10\text{k}\Omega$ , $R_2=\infty$                                  |  |       | 1.5  | 4     | $\mu\text{A}$ |
| Deviation of Reference Input Current Over Full Temperature Range            | $\Delta I_{REF}/\Delta T$      | $I_{KA}=10\text{mA}$ , $R_1=10\text{k}\Omega$ , $R_2=\infty$<br>$T_A=\text{full Temperature}$ |  |       | 0.4  | 1.2   | $\mu\text{A}$ |
| Minimum Cathode Current for Regulation                                      | $I_{KA(MIN)}$                  | $V_{KA}=V_{REF}$  |  |       | 0.45 | 1.0   | mA            |
| Off-State Cathode Current   | $I_{KA(OFF)}$                  | $V_{KA}=20\text{V}$ , $V_{REF}=0$   |  |       | 0.05 | 1.0   | $\mu\text{A}$ |
| Dynamic Impedance   | $Z_{KA}$                       | $V_{KA}=V_{REF}$ , $I_{KA}=1 \sim 100\text{mA}$<br>$f \leq 1.0\text{kHz}$                     |  |       | 0.15 | 0.5   | $\Omega$      |

Remark: Reference voltage of  $\pm 1\%$  tolerance is also available per customer's request.


## ■ TEST CIRCUIT

Test Circuit For  $V_{KA}=V_{REF}$ Test Circuit for  $V_{KA} \geq V_{REF}$ Test Circuit For  $I_{KA(OFF)}$ 


## ■ APPLICATION CIRCUIT




Shutdown Regulator




Output Control of a Three-Terminal Fixed Regulator



Higher-Current Shunt Regulator






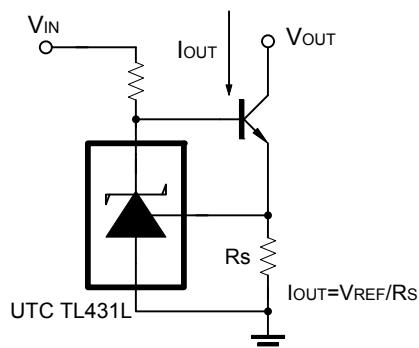


Constant-Current Sink

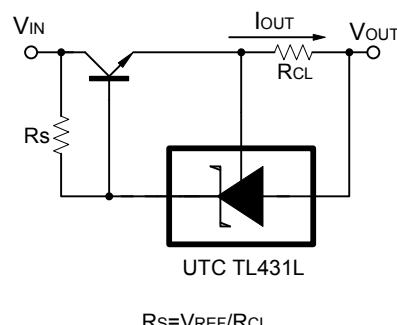

Current Limiting or Current Source

## ■ TYPICAL CHARACTERISTICS

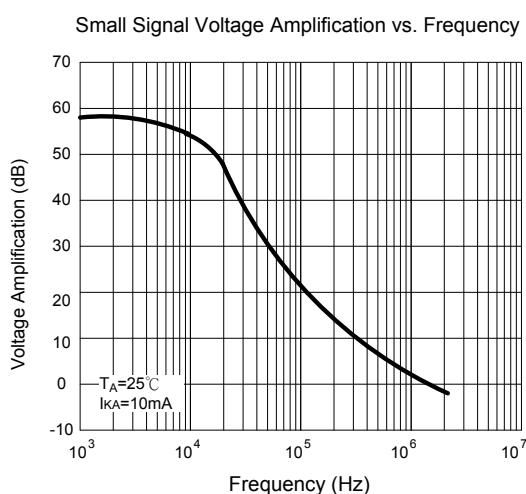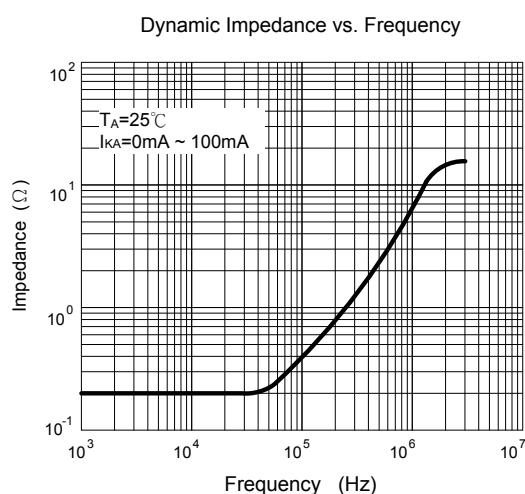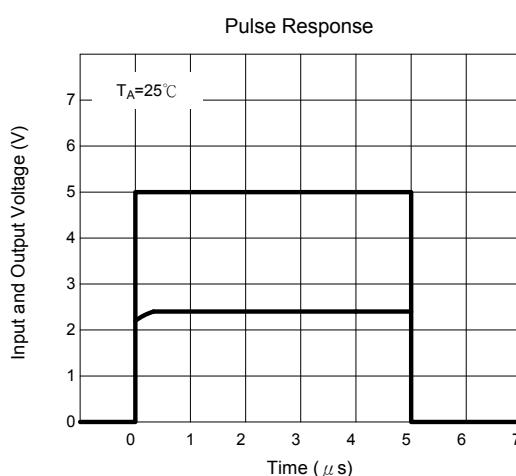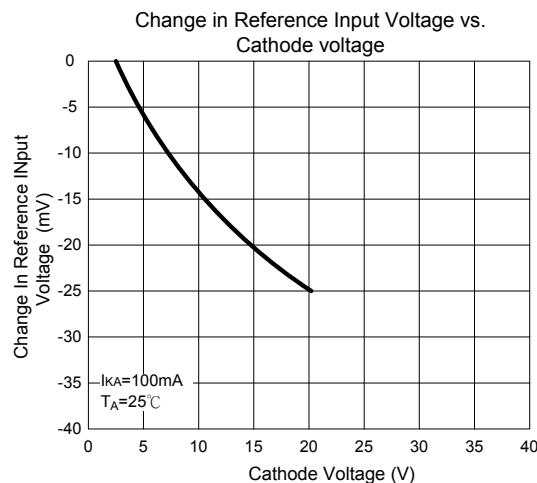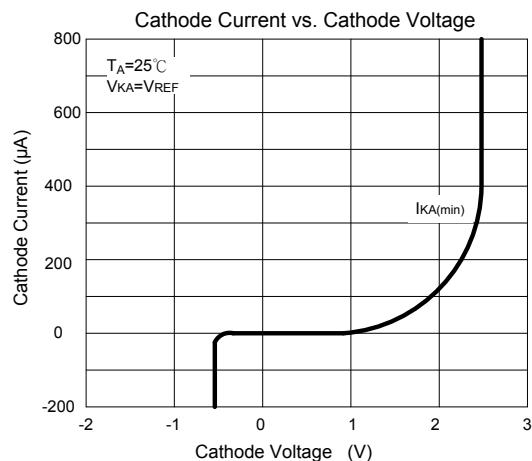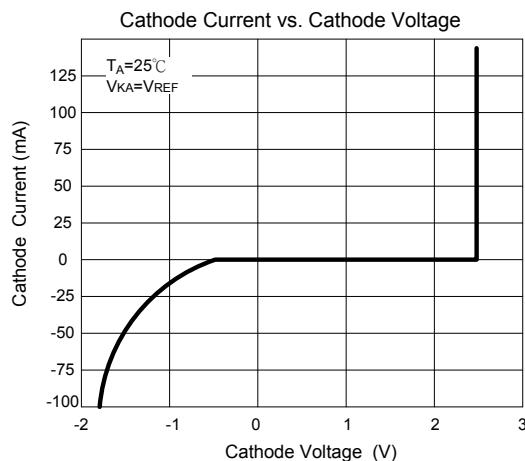

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.