



液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com

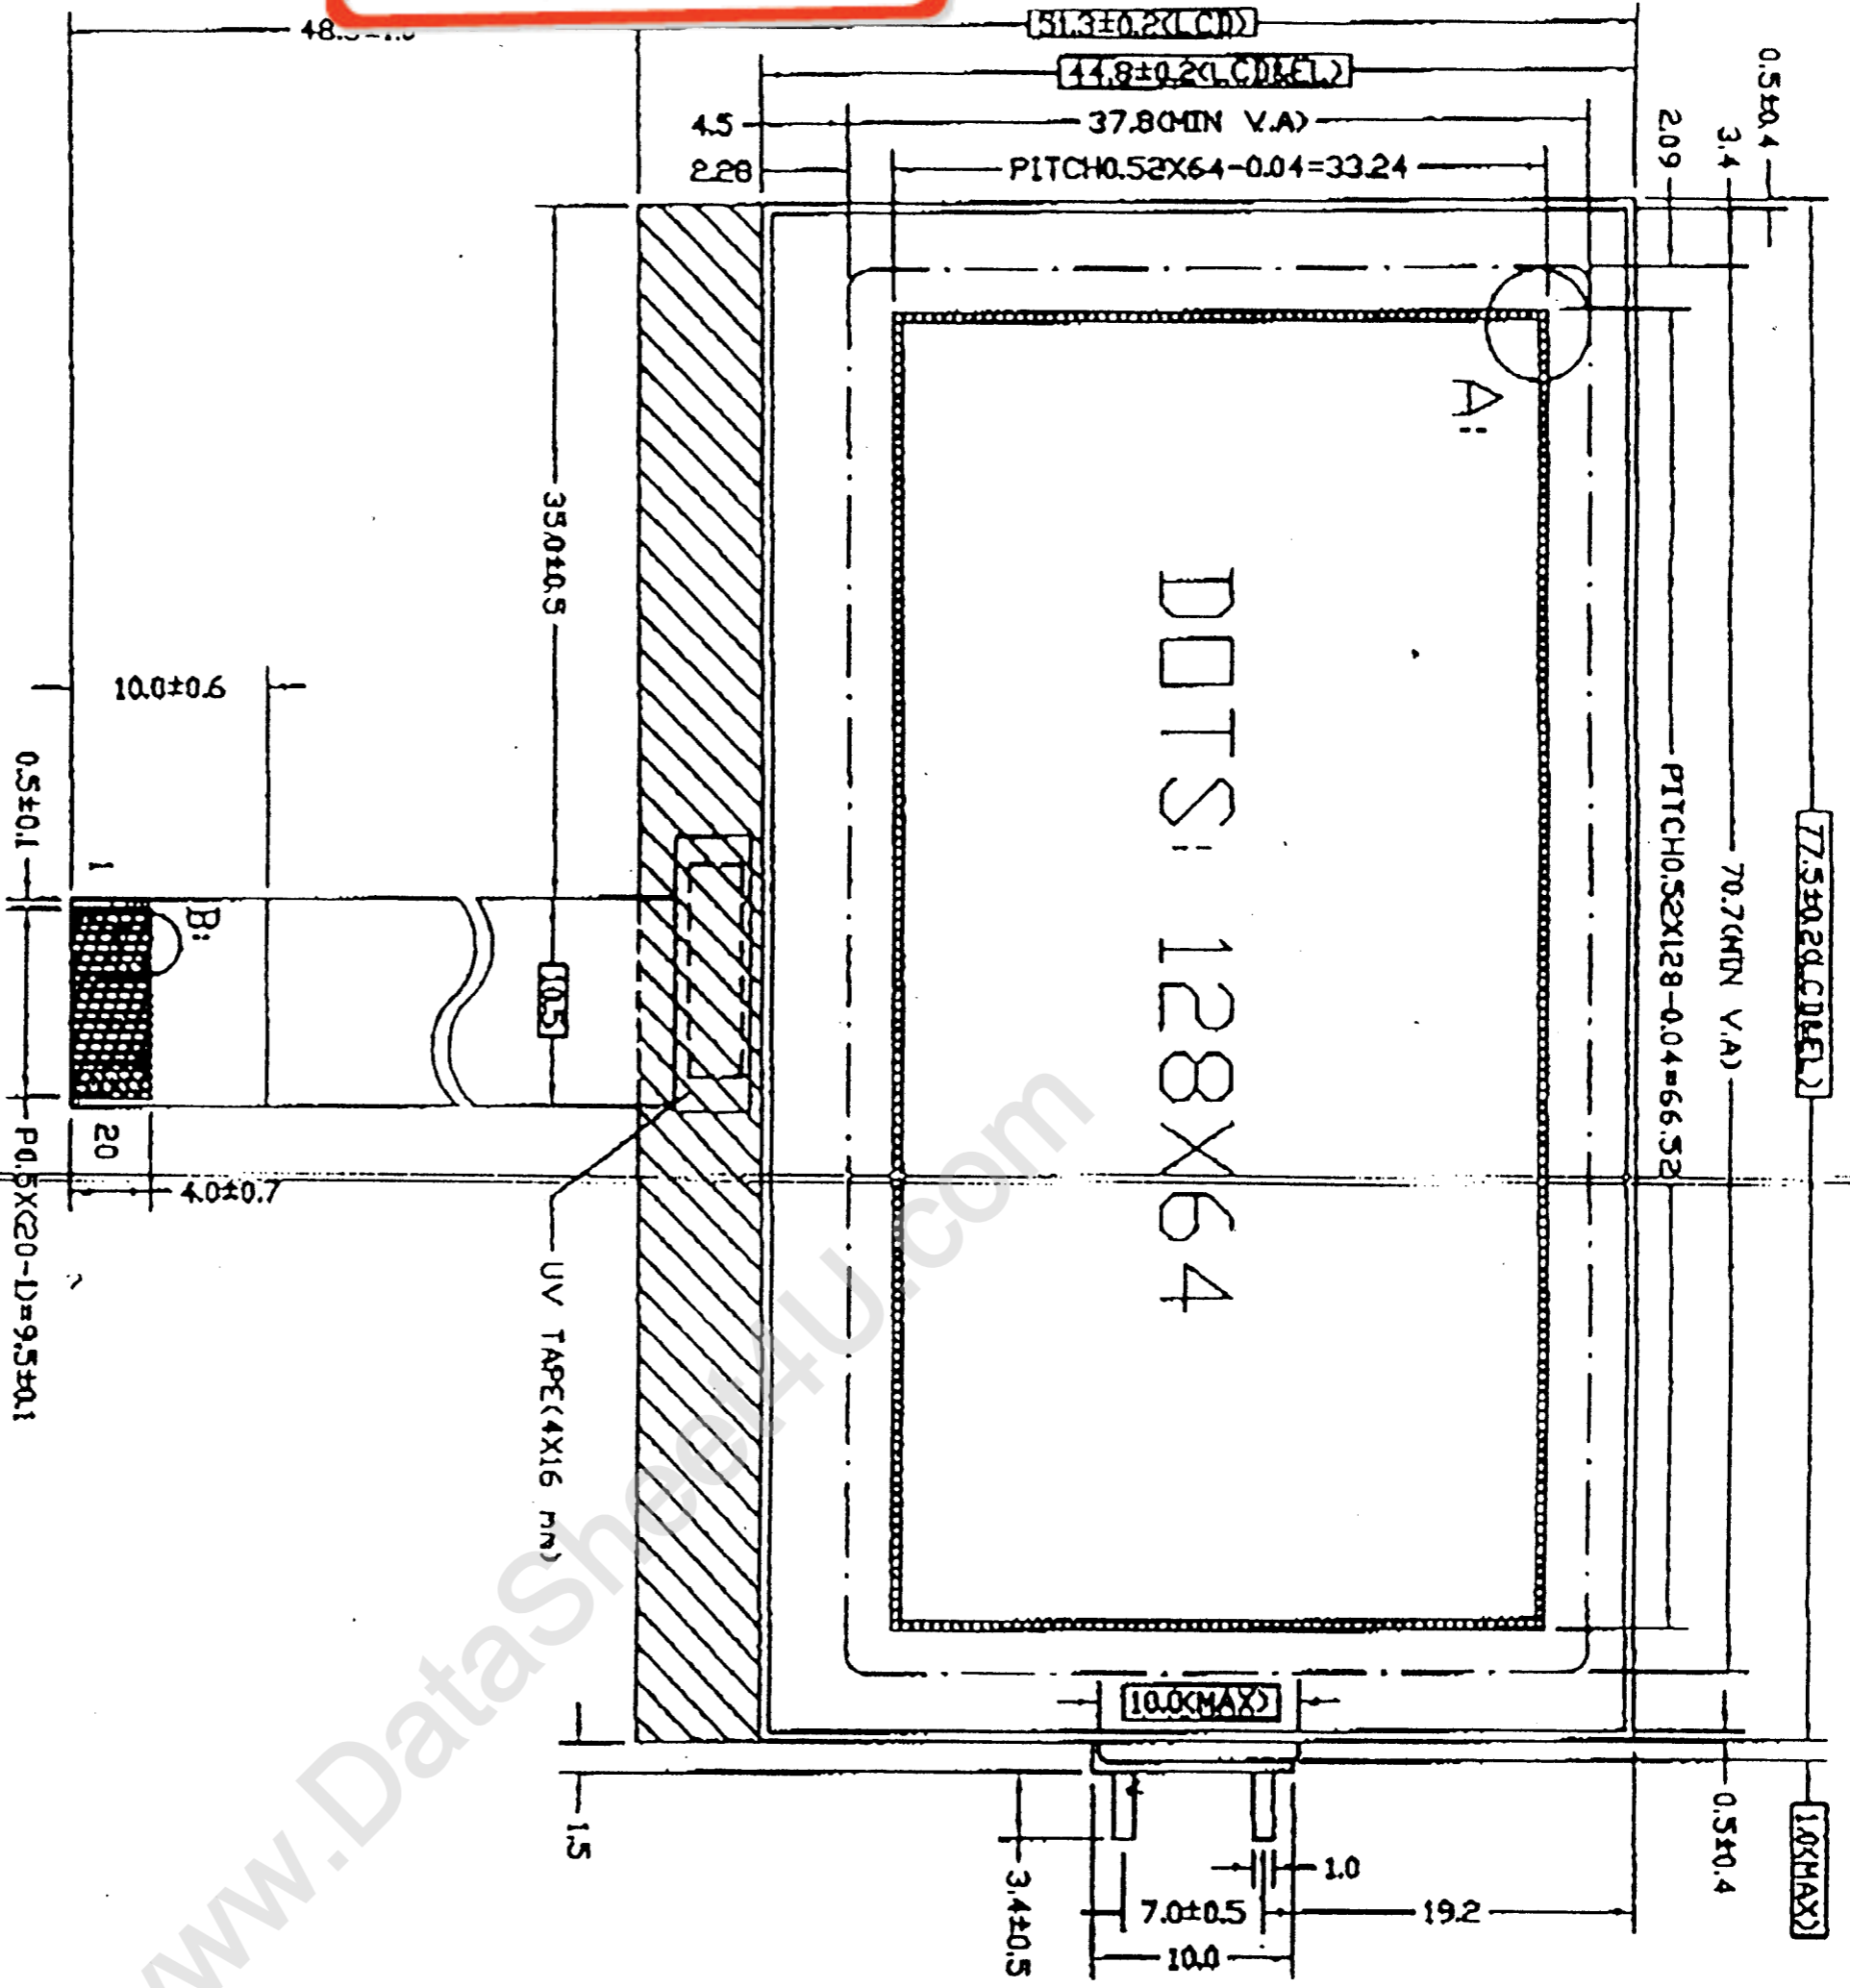


PIN NO	SYMBOL
1	V5
2	V4
3	V3
4	V2
5	V1
6	NC
7	CAP2+
8	CAP2-
9	CAP1-
10	CAP1+
11	VOUT
12	VSS
13	VDD
14	SI
15	SCL
16	/RD
17	/WR
18	A0
19	/RES
20	/CS1

DETAIL A1

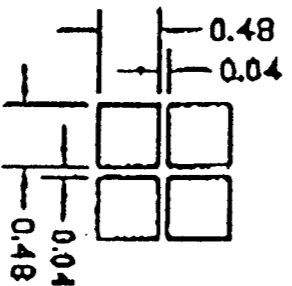

DETAIL B:

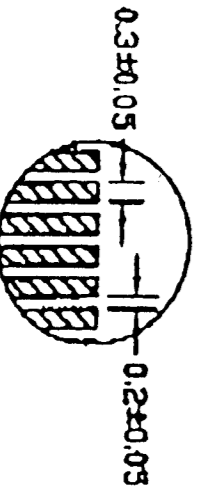

- NOTES:
1. DISPLAY TYPE: FSTN
 2. VIEWING DIRECTION: 12:00
 3. POLARIZER MODE: TRANSPARENT/POSITIVE
 4. DRIVE METHOD: 1/65 DUTY 1/9 BIAS
 5. LCD OPERATING VOLTAGE: 8.7V
 6. OPERATING TEMP: 0°C-+50°C
 7. STORAGE TEMP: -20°C-+70°C
 8. CONTROLLER: SID15605D00B
 9. VDD=5V
 10. CONNECTOR: FPC
 11. BACKLIGHT: EL(100VAC,400HZ, GREEN)
 12. UNMARKED TOLERANCES: ±0.3mm



TIAN-MA MICROELECTRONICS CO.
 22/F., CASTIC Building, Sheppard Road, Central, Shenzhen, China

DRAWN BY: [Signature]	TITLE: TM12864B2CBUG	SCALE: [Symbol]
CHECKED BY: [Signature]	DWG NO: G-1	UNIT: mm
APPROVED BY: [Signature]	DWG NAME: TM12864B2CBUG-1	SHEET NO: 1 OF 1
CONFIRMED BY:		