



液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

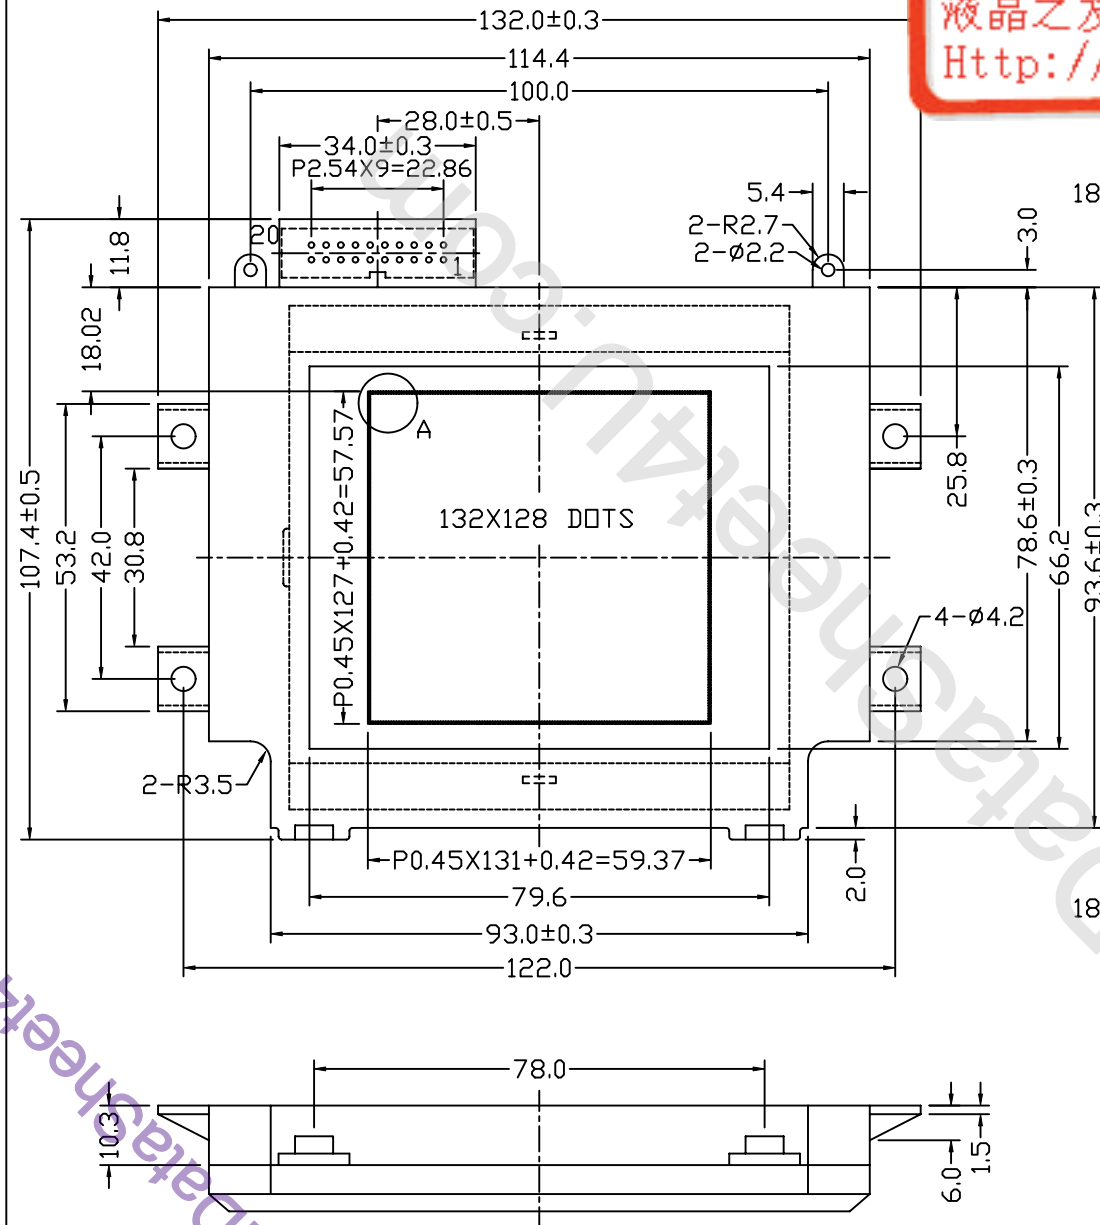

CONNECTER

DETAIL A:



PIN	SYMBOL
1	NC
2	GND
3	VDD
4	NC
5	A0
6	/CS1
7	/CS2
8	/RD
9	/WR
10	NC
11	D0
12	D1
13	D2
14	D3
15	D4
16	D5
17	D6
18	D7
19	VLED+
20	VLED-

NOTES:

- 1.DISPLAY TYPE: STN/Y-G MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.DRIVE METHOD: 1/64 DUTY 1/9 BIAS
- 5.LCD OPERATING VOLTAGE: 10.0V
- 6.VDD=2.6~3.0V
- 7.OPERATING TEMP.: $-25^{\circ}\sim+70^{\circ}$
- 8.STORAGE TEMP.: $-35^{\circ}\sim+80^{\circ}$
- 9.CONTROLLER: SSD1815BZx2
- 10.BACKLIGHT TYPE: LED
- 11.WITH PCB TESTING BOARDING
- 12.UNMARKED TOLERANCES: $\pm 0.3\text{mm}$



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM132128ABCWG	
CHECKED BY:	SCALE:	
APPROVED BY:	DWG NO: G-2	UNIT: mm
CONFIRMED BY:	DWG NAME: TM132128ABCWG-G-2	SHEET NO: OF