



液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com

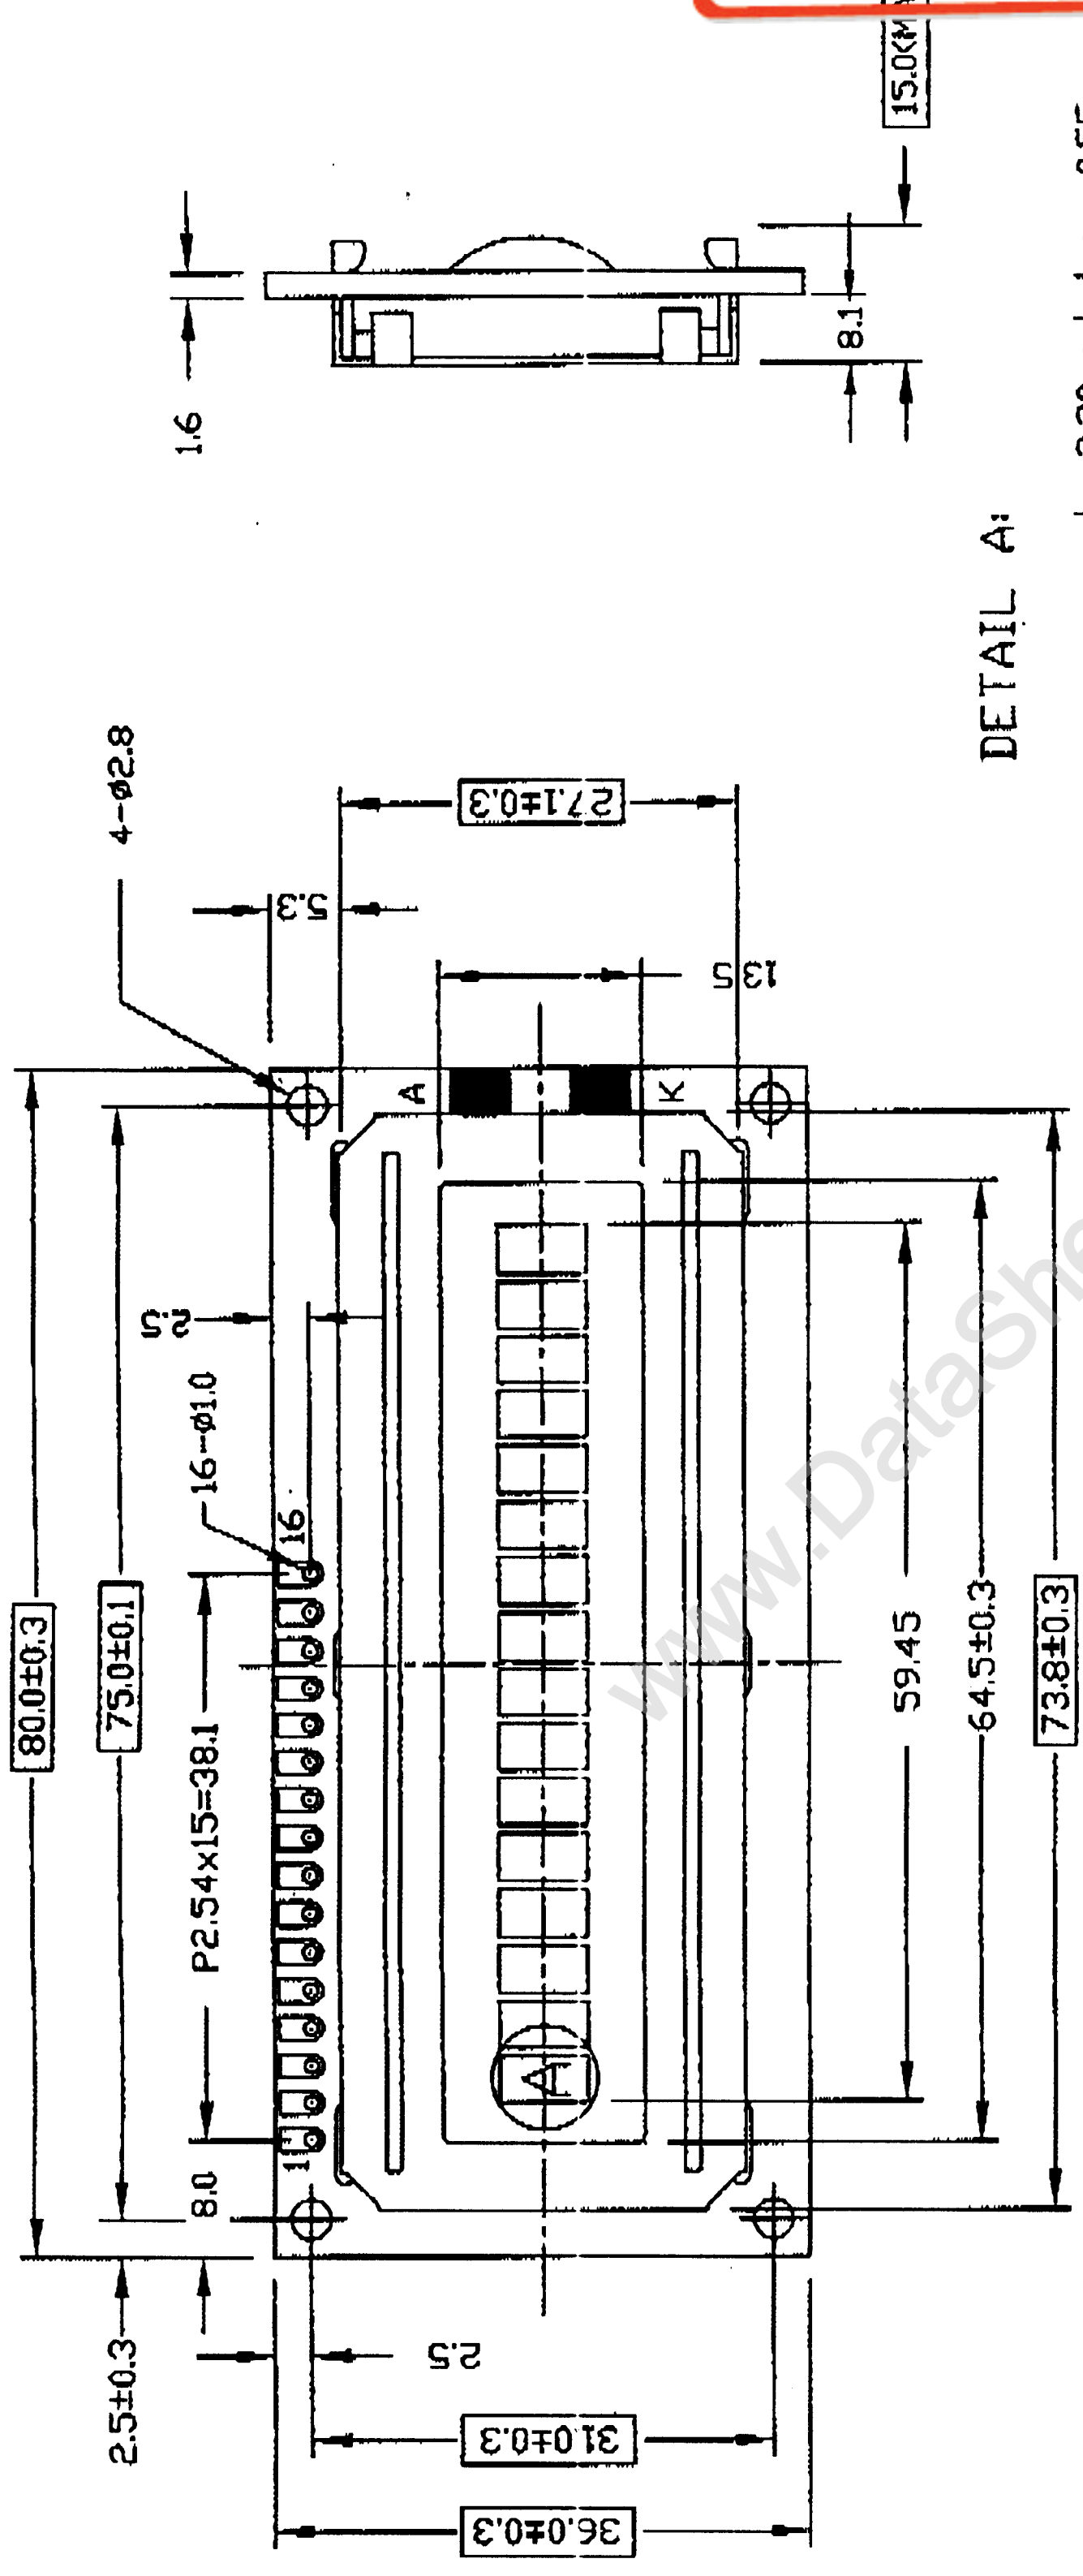

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

DETAIL A:

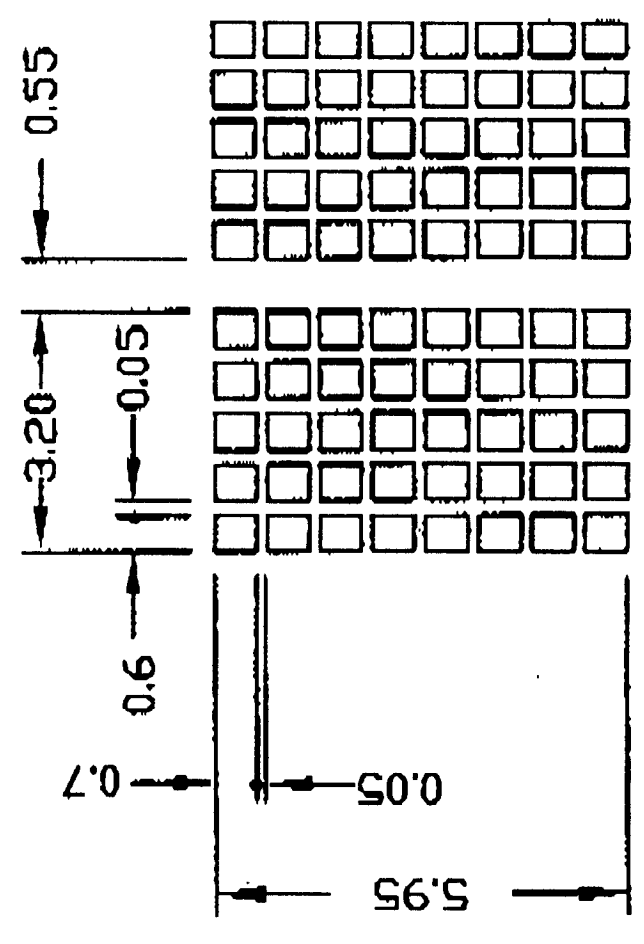

- NOTE:
1. DISPLAY TYPE: STN/GREY MODE
 2. VIEWING DIRECTION: 6:00
 3. POLARIZER MODE: TRANSLLECTIVE/POSITIVE
 4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
 5. LCD OPERATING VOLTAGE: 4.7V
 6. OPERATING TEMP.: 0°C--+50°C
 7. STORAGE TEMP.: -20°C--+60°C
 8. LED BACKLIGHT
 9. CONTROLLER: S6A0069X01-C0CX(KS0066UP-00)
 10. BEZEL IS TO BE PAINTED BLACK
 11. ALL UNMARKED TOLERANCE: ±0.3MM



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 王江 1/8-04	TITLE: TM161ADC6	SCALE: 1:1
CHECKED BY: 王江 1/8-04	DWG NO: G-1	UNIT: mm
APPROVED BY: 王江 1/8-04	DWG: M68P-M12A-0001	QUANTITY: 400
CONFIRMED BY:		