

TRIAC(Through Hole/Isolated)

TMG2C80F


SanRex Triac TMG2C80F is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_{T(RMS)}=2A$
- High Surge Current
- Lead-Free Package

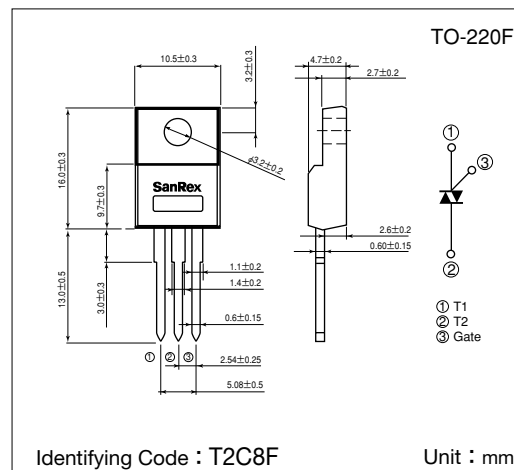


Maximum Ratings

(Tj=25°C unless otherwise specified)


Symbol	Item	Reference	Ratings	Unit
V _{DRM}	Repetitive Peak Off-State Voltage		800	V
I _{T(RMS)}	R.M.S. On-State Current	T _c =105°C	2	A
I _{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	18/20	A
I ² t	I ² t (for fusing)		1.67	A ² S
P _{GM}	Peak Gate Power Dissipation		1.5	W
P _{G(AV)}	Average Gate Power Dissipation		0.1	W
I _{GM}	Peak Gate Current		1	A
V _{GM}	Peak Gate Voltage		7	V
V _{ISO}	Isolation Breakdown Voltage (R.M.S)	A.C.1minute	1500	V
T _j	Operating Junction Temperature		-40~+125	°C
T _{stg}	Storage Temperature		-40~+150	°C
	Mass		2	g

Electrical Characteristics


Symbol	Item		Reference	Ratings			Unit
				Min.	Typ.	Max.	
IDRM	Repetitive Peak Off-State Current		VD=VDRM, Single phase, half wave, Tj=125°C			1	mA
VTM	Peak On-State Voltage		IT=3A, Inst. measurement			1.6	V
IGT1 ⁺	1	Gate Trigger Current	VD=6V, RL=10 Ω			15	mA
IGT1 ⁻	2					15	
IGT3 ⁺	3					—	
IGT3 ⁻	4					15	
VGT1 ⁺	1	Gate Trigger Voltage				1.5	V
VGT1 ⁻	2					1.5	
VGT3 ⁺	3					—	
VGT3 ⁻	4					1.5	
VGD	Non-Trigger Gate Voltage		Tj=125°C, VD=½VDRM	0.2			V
(dv/dt)c	Critical Rate of Rise of Off-State Voltage at Commutation		Tj=125°C, (di/dt)c=−1A/ms, VD=400V	3			V/μs
IH	Holding Current				2		mA
Rth(j-c)	Thermal Resistance		Junction to case			7.5	°C/W
Rth(j-a)			Junction to ambient			50	°C/W

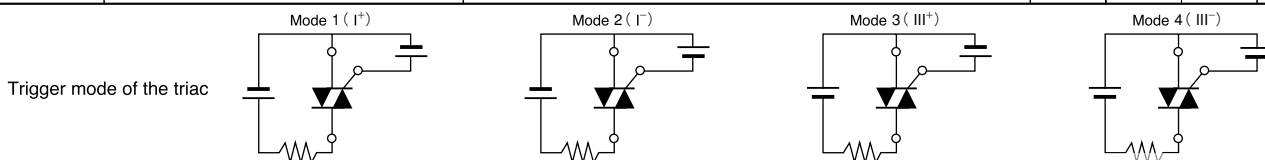


Gate Characteristics

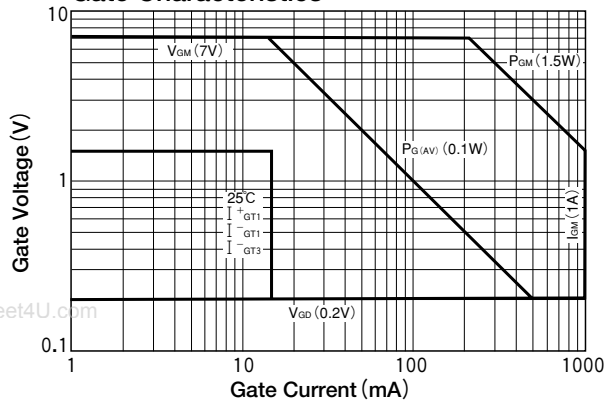


On-State Characteristics (MAX)

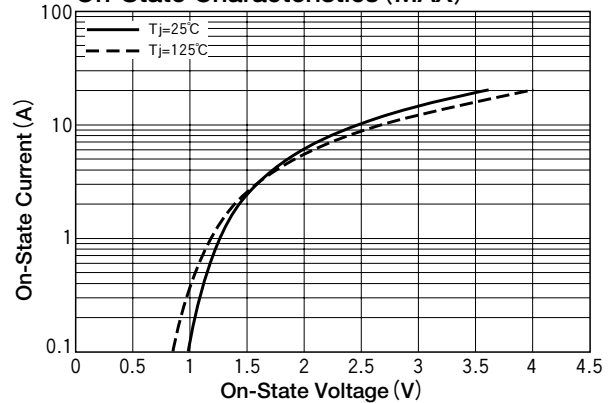


RMS On-State Current vs Maximum Power Dissipation

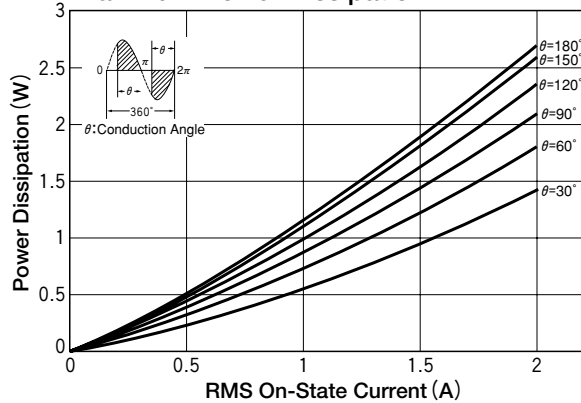


RMS On-State vs Allowable Case Temperature

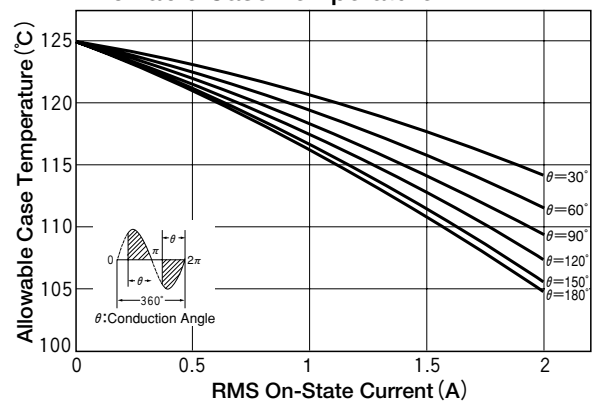


Surge On-State Current Rating (Non-Repetitive)

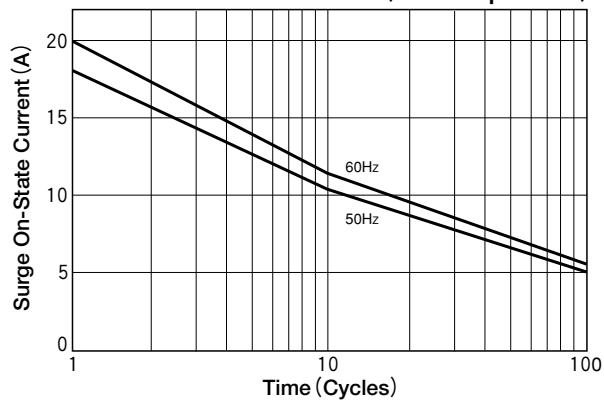


Transient Thermal Impedance

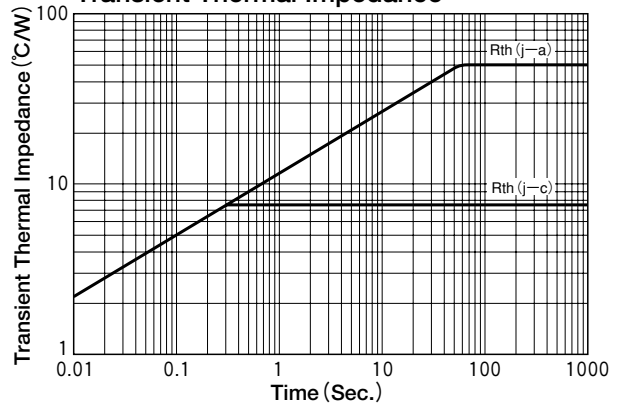

$I_{GT} - T_J$ (Typical)

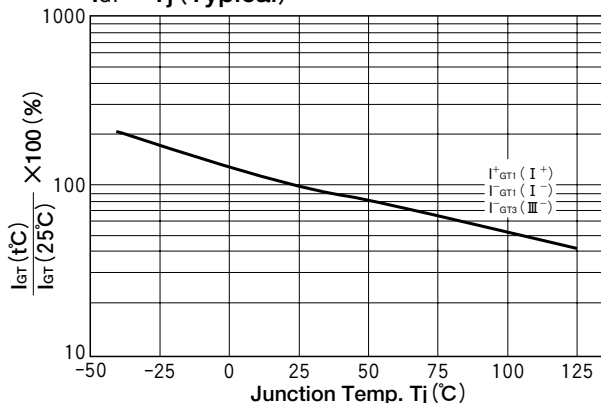

$V_{GT} - T_J$ (Typical)

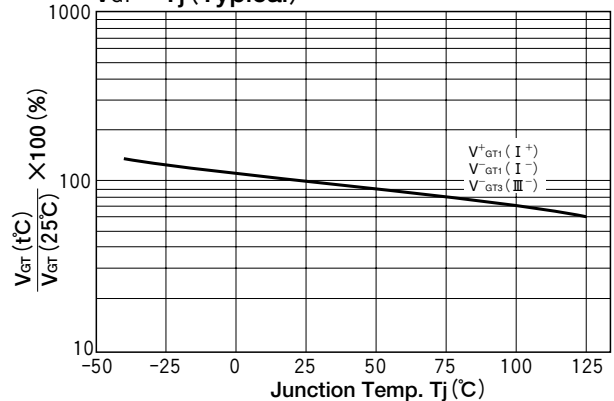

RMS On-State vs
Allowable Ambient Temperature

