

# Plug-In Low Noise Amplifier

**NEW!**  
TO-0812LN

800 to 1200 MHz

## Maximum Ratings

Operating Temperature	-54°C to 85°C
Storage Temperature	-55°C to 100°C

## Pin Connections


RF IN	5
RF OUT	11
DC	2
CASE GND	1,3,4,6,7,8,9,10,12

## Features

- very low noise, 0.8 dB typ.
- ideal for printed circuit design
- excellent gain flatness
- hermetic sealed

## Applications

- military




CASE STYLE: QQ96  
PRICE: \$199.00 ea. QTY (1-9)

## Electrical Specifications

MODEL NO.	FREQ. (MHz)	NF* (dB)	GAIN (dB)		MAXIMUM POWER (dBm)		INTERCEPT POINT (dBm)	VSWR (-1) Max.		DC POWER	
			Min.	Flatness Max.	Output (1 dB Comp.) Typ.	Input (no damage)		In	Out	Volt (V)	Current (mA)
TO-0812LN	800-1200	1.2	20	±1.0	+8	+10	+22.5	2.5	2.5	15	70

\*NF specified at room temperature, increases to 1.6 dB max. at +85°C

## Outline Drawing

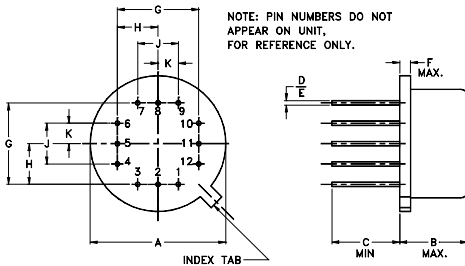

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.600	.250	.25	.016	.020	.04	.400	.200
15.24	6.35	6.35	.41	.51	1.02	10.16	5.08
J	K	wt.					
.200	.100	grams <td colspan="5"></td>					
5.08	2.54	4.0					

## Typical Performance Data

Frequency (MHz)	Gain (dB)			Directivity (dB)			VSWR		N.F. (dB)	Pout (dBm) (@1dB COMPR)
	12V	15V	16V	12V	15V	16V	IN	OUT		
800.00	25.24	26.21	26.52	25.41	25.15	25.41	2.21	1.84	0.97	9.27
850.00	25.45	26.39	26.68	24.15	23.86	24.15	1.90	1.69	0.92	9.74
900.00	25.57	26.47	26.75	23.16	22.93	23.16	1.70	1.58	0.92	9.88
950.00	25.65	26.51	26.77	22.43	22.37	22.43	1.59	1.52	0.90	10.22
1000.00	25.70	26.53	26.78	21.75	21.94	21.75	1.57	1.46	0.92	10.46
1050.00	25.78	26.59	26.83	21.13	21.18	21.13	1.61	1.42	0.90	10.68
1100.00	25.85	26.65	26.89	20.54	20.51	20.54	1.71	1.40	0.88	10.88
1150.00	25.96	26.74	26.98	20.06	20.16	20.06	1.85	1.39	0.85	10.95
1170.00	25.99	26.78	27.02	19.68	19.83	19.68	1.91	1.39	0.85	10.95
1200.00	26.03	26.83	27.07	19.55	19.55	19.55	2.01	1.39	0.82	10.95

