



Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311

Phone: (818) 701-4933

Fax: (818) 701-4939

UFT14005 THRU UFT14060

Features

- Supre Fast switching for high efficiency
- High Surge Capability
- Low Leakage
- Low Forward Voltage Drop
- High Current Capability

Maximum Ratings

- Operating Temperature: -55°C to +175°C
- Storage Temperature: -55°C to +175°C


MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
UFT14005	50V	35V	50V
UFT14010	100V	70V	100V
UFT14020	200V	40V	200V
UFT14040	400V	280V	400V
UFT14060	600V	420V	600V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	140 A	$T_C = 115^\circ\text{C}$
Peak Forward Surge Current 14040 14060	I_{FSM}	1000A 800 A 700 A	8.3ms, half sine
Maximum Instantaneous Forward Voltage 14005-14020 14040 14060	V_F	0.975V 1.25V 1.35V	$I_{FM} = 70.0\text{A};$ $T_J = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	50μA 6mA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$
Maximum Reverse Recovery Time 14005-14020 14040 14060	T_{rr}	60ns 75ns 90ns	$I_F = 0.5\text{A}, I_R = 1.0\text{A},$ $I_{rr} = 0.25\text{A}$
Typical Junction Capacitance 14005-14020 14040 14060	C_J	575pF 300pF 275pF	Measured at 1.0MHz, $V_R = 10\text{V}$

140 Amp Supre Fast Recovery Rectifier 50 to 600 Volts


POWERMOD

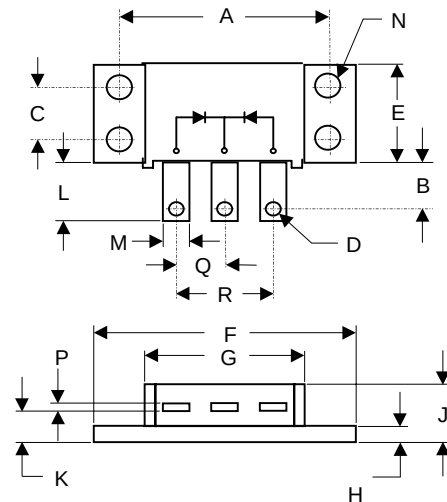

DIMENSIONS					
DIM	INCH		MM		NOTE
	MIN	MAX	MIN	MAX	
A	1.995	2.005	50.67	50.93	
B	.330	.325	7.62	8.26	
C	.495	.505	12.57	12.83	
D	.182	.192	4.62	4.88	Ø
E	.990	1.010	25.12	25.65	
F	2.390	2.410	60.71	61.21	
G	1.500	1.525	38.10	38.70	
H	.120	.130	3.05	3.30	
J	-----	.400	-----	10.16	
K	.240	.260	6.10	6.60	
L	.490	.510	12.45	12.95	
M	.330	.350	8.38	8.90	
N	.175	.195	4.45	4.95	Ø
P	.035	.045	0.89	1.14	
Q	.445	.455	11.30	11.56	
R	.890	.910	22.61	23.11	


*Pulse Test: Pulse Width 300μsec, Duty Cycle 2%

Figure 1
Typical Forward Characteristics

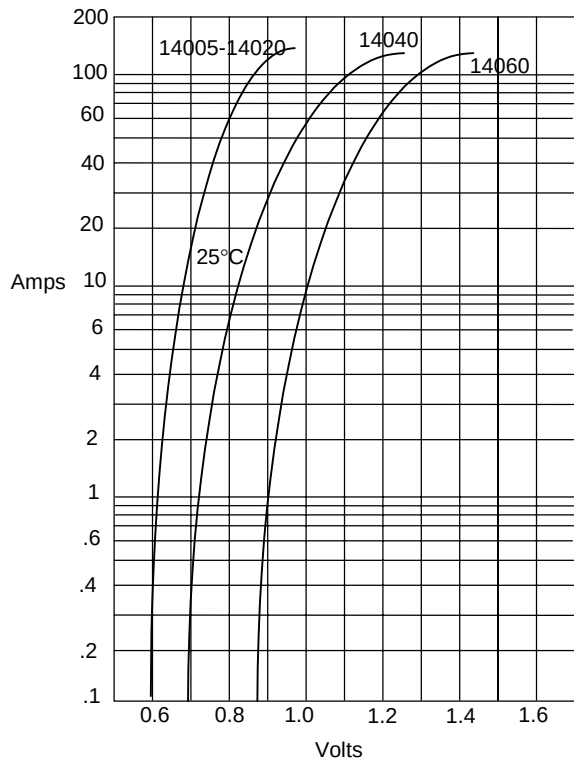


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

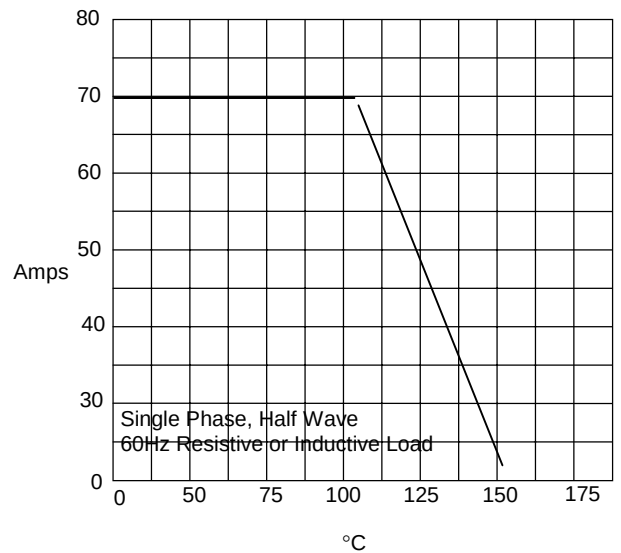


Average Forward Rectified Current - Amperes versus
Case Temperature - °C

Figure 3
Junction Capacitance

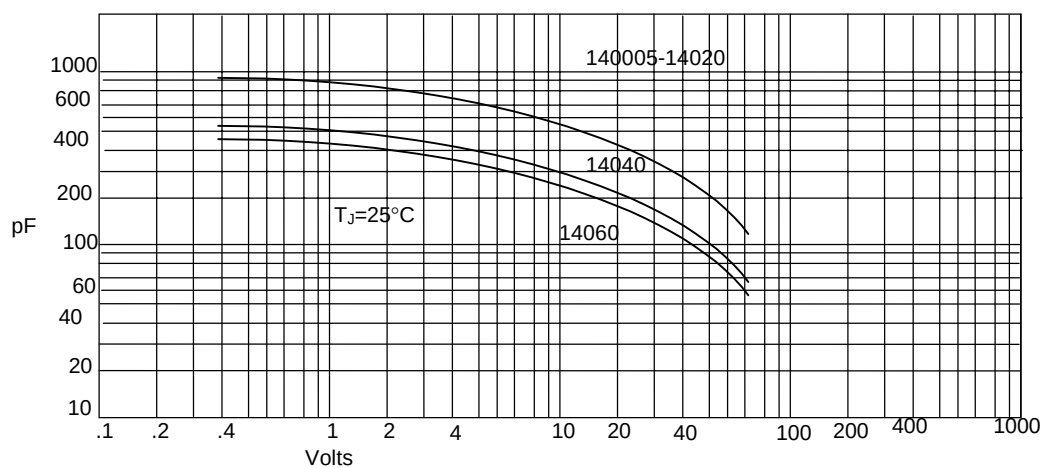


Junction Capacitance - pF versus
Reverse Voltage - Volts

Figure 4
Typical Reverse Characteristics

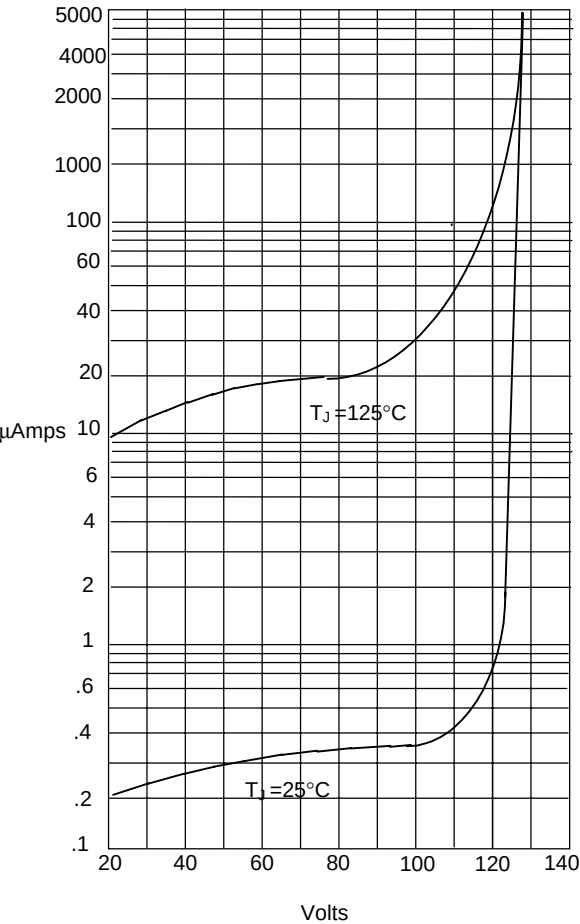

Instantaneous Reverse Leakage Current - MicroAmperes versus
Percent Of Rated Peak Reverse Voltage - Volts

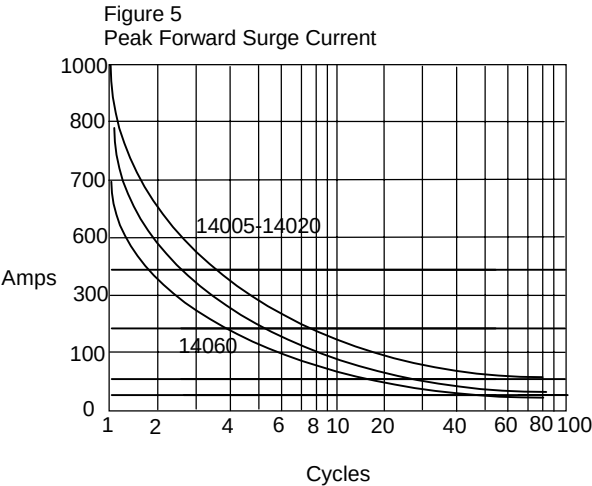

Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles