

UP

UNI-PAC™ drum core power inductors



Product features

- Maximum power density
- Ideal for applications requiring low inductance and high current in a miniature package
- Current range from 0.47 A to 19.2 A
- Inductance range from 0.470 uH to 1000 uH
- Protective case eliminates core breakage
- Meets UL 94V-0 flammability standard
- Ferrite core material

Applications

- Buck or boost inductor
- Workstations/servers
- Desktop computer
- DVD Players
- Portable power devices
- Base stations
- Industrial power supplies
- Output filter chokes
- Test equipment instrumentation

Environmental Data

- Storage temperature range (Component): -40 °C to +125 °C
- Operating temperature range: -40 °C to +125 °C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020 (latest revision) compliant



Product Specifications


| Part Number | Inductance μH (rated) | OCL ⁽¹⁾ $\mu\text{H} \pm 20\%$ | I RMS ⁽²⁾ (A) | I SAT ⁽³⁾ (A) | DCR ⁽⁴⁾ Ohms max. |
|-------------|----------------------------------|---|--------------------------|--------------------------|------------------------------|
| UP1B-R47-R | 0.47 | 0.569 | 6.0 | 7.7 | 0.0097 |
| UP1B-1R0-R | 1.0 | 1.20 | 4.4 | 5.3 | 0.0177 |
| UP1B-1R5-R | 1.5 | 1.61 | 4.2 | 4.5 | 0.0200 |
| UP1B-2R2-R | 2.2 | 2.62 | 3.1 | 3.5 | 0.0363 |
| UP1B-3R3-R | 3.3 | 3.79 | 2.9 | 3.0 | 0.0428 |
| UP1B-4R7-R | 4.7 | 5.15 | 2.2 | 2.6 | 0.0544 |
| UP1B-6R8-R | 6.8 | 6.87 | 1.7 | 2.2 | 0.0897 |
| UP1B-100-R | 10.0 | 11.00 | 1.5 | 1.9 | 0.1107 |
| UP1B-150-R | 15.0 | 16.00 | 1.2 | 1.5 | 0.1747 |
| UP1B-220-R | 22.0 | 23.50 | 1.0 | 1.2 | 0.2541 |
| UP1B-330-R | 33.0 | 36.00 | 0.82 | 0.99 | 0.3670 |
| UP1B-470-R | 47.0 | 48.50 | 0.72 | 0.87 | 0.4740 |
| UP1B-680-R | 68.0 | 73.52 | 0.58 | 0.67 | 0.7320 |
| UP1B-101-R | 100.0 | 112.67 | 0.47 | 0.53 | 1.11 |
| UP1B-151-R | 150.0 | 152.40 | 0.40 | 0.46 | 1.61 |
| UP1B-221-R | 220.0 | 223.10 | 0.36 | 0.38 | 1.96 |
| UP1B-331-R | 330.0 | 331.90 | 0.28 | 0.31 | 3.10 |
| UP2B-R47-R | 0.47 | 0.595 | 10.6 | 11.4 | 0.0049 |
| UP2B-1R0-R | 1.0 | 1.00 | 9.3 | 9.9 | 0.0065 |
| UP2B-1R5-R | 1.5 | 1.46 | 8.3 | 7.9 | 0.0081 |
| UP2B-2R2-R | 2.2 | 2.56 | 7.2 | 6.1 | 0.0107 |
| UP2B-3R3-R | 3.3 | 3.23 | 6.5 | 5.1 | 0.0128 |
| UP2B-4R7-R | 4.7 | 4.77 | 5.5 | 4.2 | 0.0165 |
| UP2B-6R8-R | 6.8 | 6.63 | 5.0 | 3.6 | 0.0202 |
| UP2B-100-R | 10.0 | 9.73 | 4.3 | 3.3 | 0.0267 |
| UP2B-150-R | 15.0 | 15.43 | 3.5 | 2.4 | 0.0410 |
| UP2B-220-R | 22.0 | 22.50 | 2.8 | 2.0 | 0.0617 |
| UP2B-330-R | 33.0 | 33.13 | 2.1 | 1.7 | 0.0917 |
| UP2B-470-R | 47.0 | 48.65 | 1.7 | 1.4 | 0.1388 |
| UP2B-680-R | 68.0 | 68.17 | 1.5 | 1.2 | 0.1787 |
| UP2B-820-R | 82.0 | 84.1 | 1.34 | 1.03 | 0.2235 |
| UP2B-101-R | 100.0 | 102.60 | 1.2 | 0.95 | 0.2707 |
| UP2B-151-R | 150.0 | 150 | 1.0 | 0.77 | 0.4100 |
| UP2B-221-R | 220.0 | 223 | 0.773 | 0.637 | 0.6717 |
| UP2B-331-R | 330.0 | 338 | 0.676 | 0.510 | 0.8783 |
| UP2B-471-R | 470.0 | 471 | 0.553 | 0.427 | 1.31 |
| UP2B-681-R | 680.0 | 700 | 0.452 | 0.355 | 1.97 |
| UP2B-821-R | 820.0 | 823 | 0.423 | 0.334 | 2.24 |
| UP2B-102-R | 1000.0 | 1005 | 0.369 | 0.300 | 2.96 |
| UP3B-R47-R | 0.47 | 0.452 | 16.0 | 25.1 | 0.0021 |
| UP3B-1R0-R | 1.0 | 1.34 | 12.5 | 15.3 | 0.0034 |
| UP3B-1R5-R | 1.5 | 2.08 | 10.0 | 12.0 | 0.0053 |
| UP3B-2R2-R | 2.2 | 3.01 | 9.2 | 10.2 | 0.0074 |
| UP3B-3R3-R | 3.3 | 3.96 | 8.0 | 9.3 | 0.0083 |
| UP3B-4R7-R | 4.7 | 5.00 | 6.5 | 7.7 | 0.0114 |
| UP3B-6R8-R | 6.8 | 7.70 | 5.8 | 6.2 | 0.0183 |
| UP3B-100-R | 10.0 | 11.00 | 4.3 | 5.2 | 0.0260 |
| UP3B-150-R | 15.0 | 16.38 | 3.9 | 4.3 | 0.0317 |
| UP3B-220-R | 22.0 | 23.93 | 3.1 | 3.7 | 0.0490 |
| UP3B-330-R | 33.0 | 33.85 | 2.4 | 3.0 | 0.0688 |
| UP3B-470-R | 47.0 | 51.00 | 1.9 | 2.4 | 0.1082 |
| UP3B-680-R | 68.0 | 69.50 | 1.6 | 2.0 | 0.1558 |
| UP3B-101-R | 100.0 | 101.40 | 1.4 | 1.8 | 0.2053 |
| UP3B-151-R | 150.0 | 152.9 | 1.2 | 1.4 | 0.2960 |
| UP3B-331-R | 330.0 | 332.80 | 0.75 | 0.98 | 0.7330 |
| UP4B-R47-R | 0.47 | 0.473 | 19.2 | 51.7 | 0.0019 |
| UP4B-1R0-R | 1.0 | 0.916 | 17.3 | 37.3 | 0.0023 |
| UP4B-1R5-R | 1.5 | 1.52 | 13.4 | 28.9 | 0.0039 |
| UP4B-2R2-R | 2.2 | 2.27 | 12.0 | 23.7 | 0.0048 |
| UP4B-3R3-R | 3.3 | 3.14 | 11.0 | 20.2 | 0.0057 |
| UP4B-4R7-R | 4.7 | 5.34 | 8.6 | 15.6 | 0.0093 |
| UP4B-6R8-R | 6.8 | 6.66 | 8.3 | 14.1 | 0.0100 |
| UP4B-100-R | 10.0 | 9.77 | 6.8 | 11.5 | 0.0150 |
| UP4B-150-R | 15.0 | 15.61 | 5.5 | 9.1 | 0.0230 |
| UP4B-220-R | 22.0 | 22.61 | 4.5 | 7.6 | 0.0340 |
| UP4B-330-R | 33.0 | 34.30 | 3.7 | 6.1 | 0.0520 |
| UP4B-470-R | 47.0 | 48.10 | 3.1 | 5.2 | 0.0740 |
| UP4B-680-R | 68.0 | 69.14 | 2.4 | 4.3 | 0.1200 |
| UP4B-101-R | 100.0 | 99.42 | 2.0 | 3.6 | 0.1700 |
| UP4B-151-R | 150.0 | 146.90 | 1.7 | 3.0 | 0.2392 |
| UP4B-221-R | 220.0 | 221.40 | 1.4 | 2.4 | 0.3571 |
| UP4B-331-R | 330.0 | 330.00 | 1.1 | 2.0 | 0.5800 |
| UP4B-471-R | 470.0 | 470.10 | 0.91 | 1.7 | 0.8330 |

Notes: (1) Open Circuit Inductance Test Parameters: 100 kHz, 250 Vrms, 0.0 A dc.
(2) RMS current for an approximate ΔT of 40 °C. at an ambient temperature of +85 °C.


(3) Peak current for approximately 30% rolloff UP1B, 3B, 4B. 10% rolloff UP2B @ +20 °C
(4) DCR limits +20 °C.

Dimensions- mm


UP1B

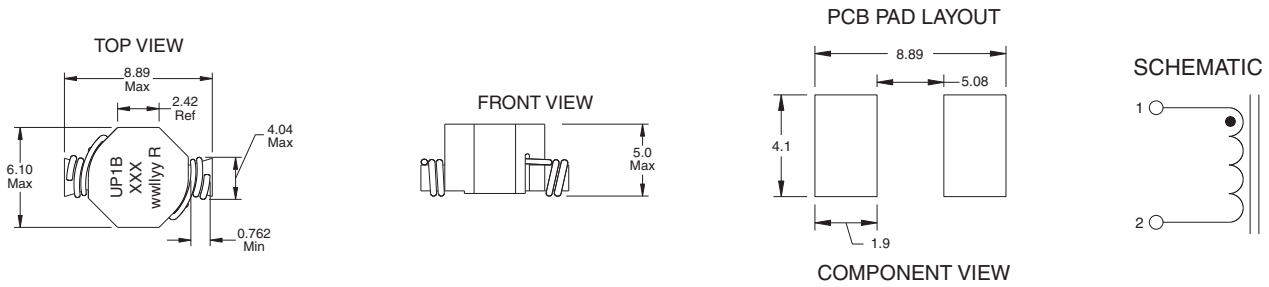


UP2B

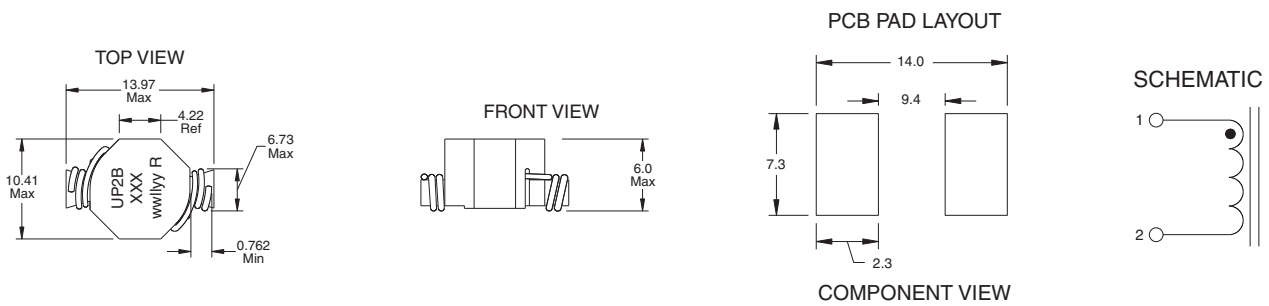

UP3B

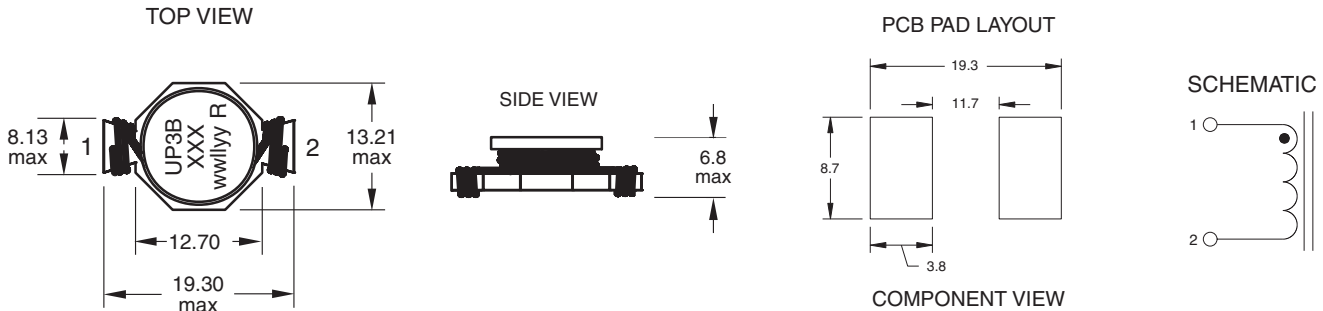

UP4B

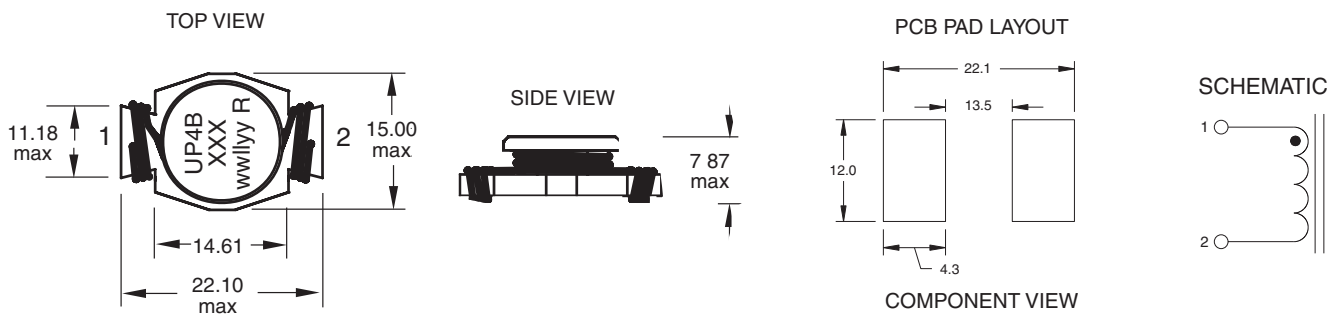


Do not route traces or vias underneath inductor

wwllyy = (date code) R = revision level
xxx = Inductance value per family chart


Packaging information- mm

UP1B

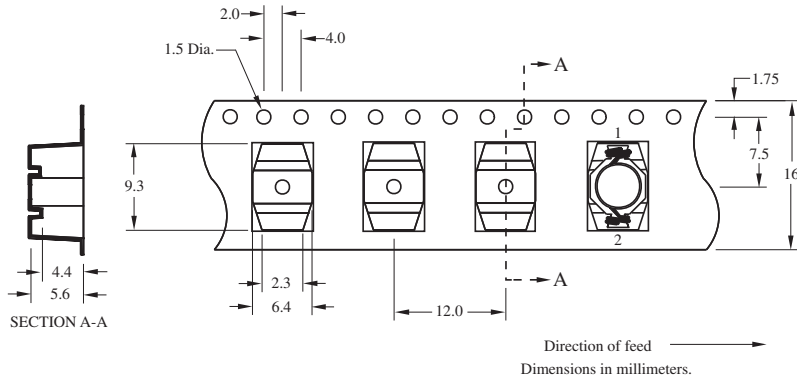


Parts packaged on 13" Diameter reel,
900 parts per reel.

UP2B

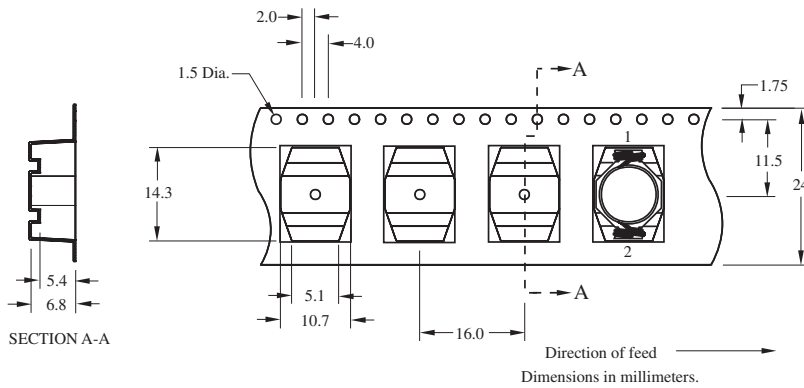


Parts packaged on 13" Diameter reel,
550 parts per reel.

UP3B

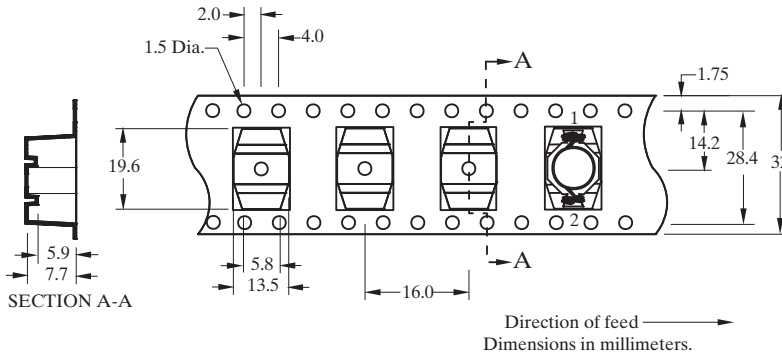

Parts packaged on 13" Diameter reel,
450 parts per reel.

UP4B

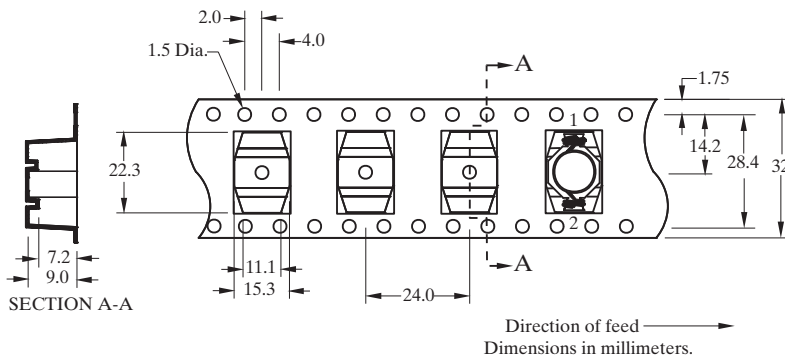


Parts packaged on 13" Diameter reel,
275 parts per reel.

Inductance characteristics


UP1B-1R0

Typical Inductance & Energy vs Saturation Current

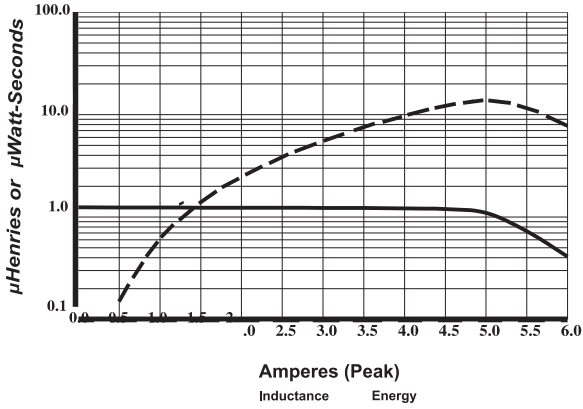


UP1B-100

Typical Inductance & Energy vs Saturation Current

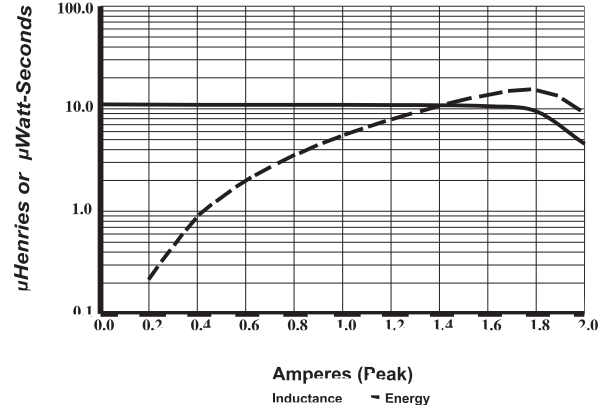


UP1B-470

Typical Inductance & Energy vs Saturation Current

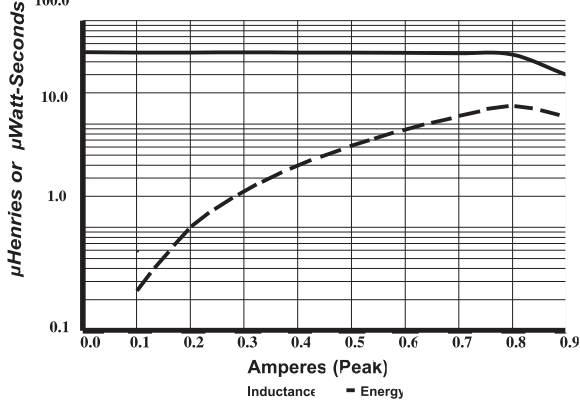


UP2B-1R0

Typical Inductance & Energy vs Saturation Current

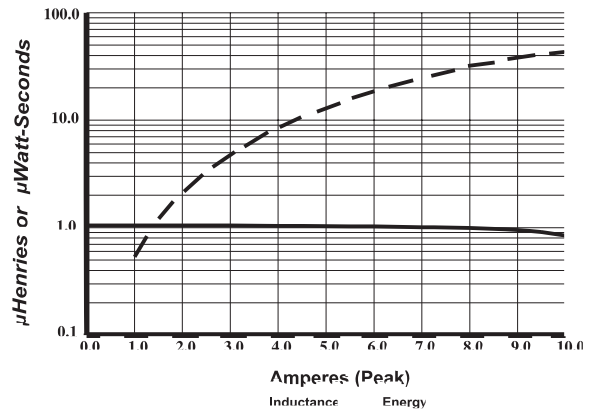


UP2B-100

Typical Inductance & Energy vs Saturation Current

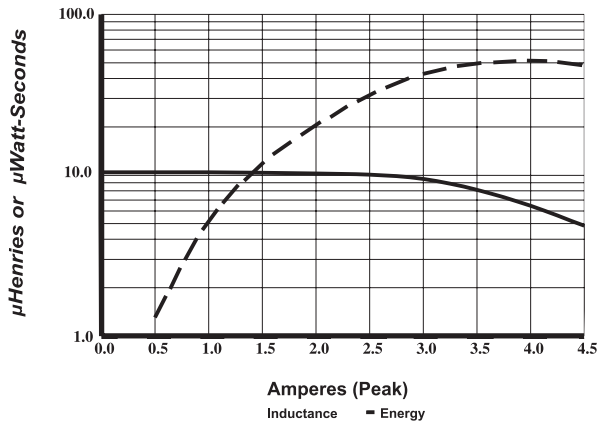

UP2B-470


Typical Inductance & Energy vs Saturation Current

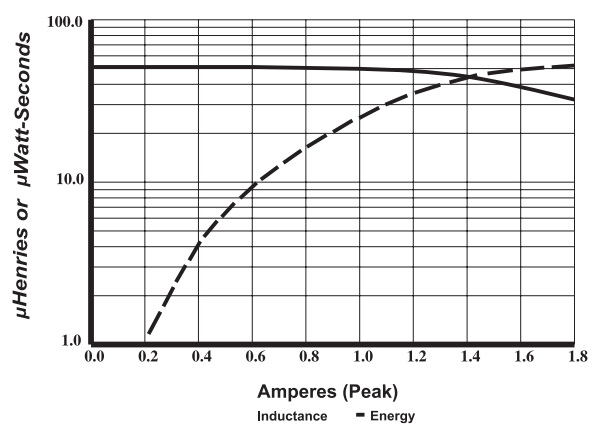

Inductance characteristics


UP3B-1R0

Typical Inductance & Energy vs Saturation Current

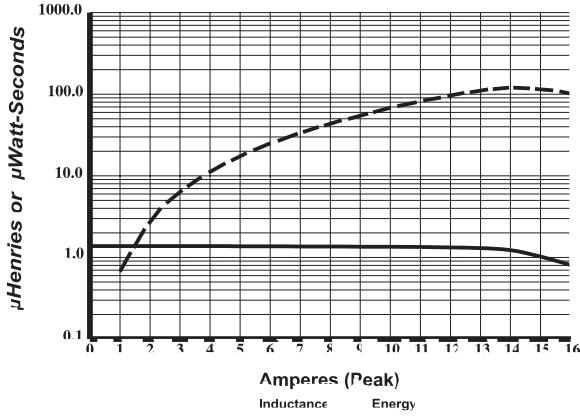


UP3B-100

Typical Inductance & Energy vs Saturation Current

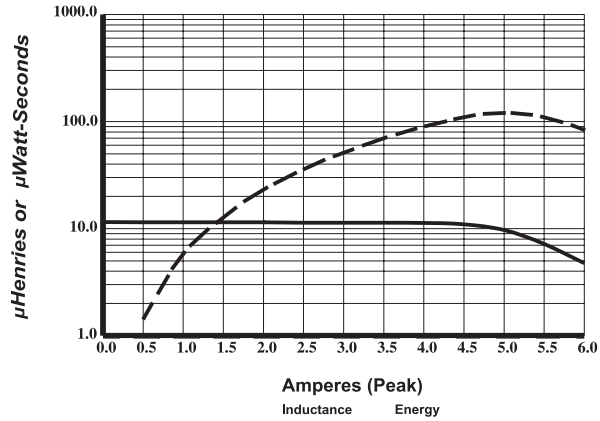


UP3B-470

Typical Inductance & Energy vs Saturation Current

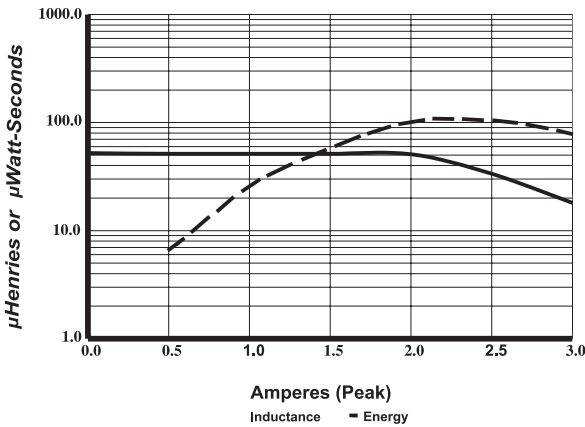


UP4B-1R0

Typical Inductance & Energy vs Saturation Current

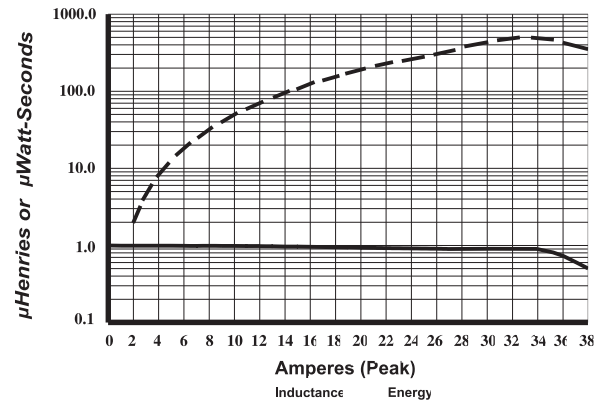


UP4B-100

Typical Inductance & Energy vs Saturation Current

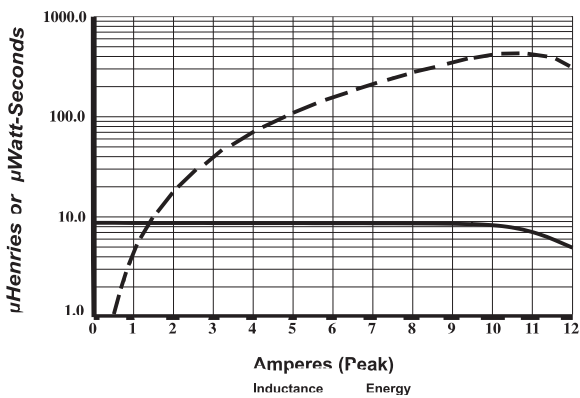

UP4B-470

Typical Inductance & Energy vs Saturation Current

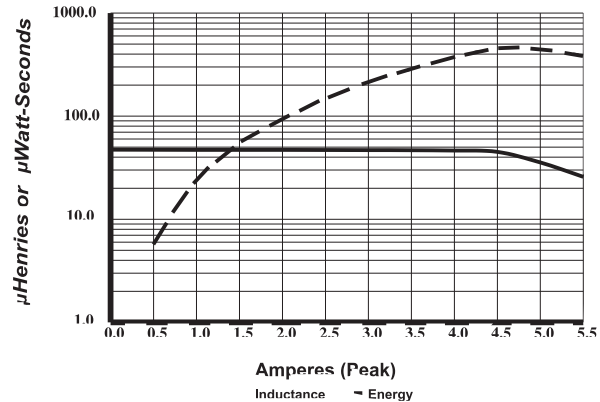

Solder Reflow Profile

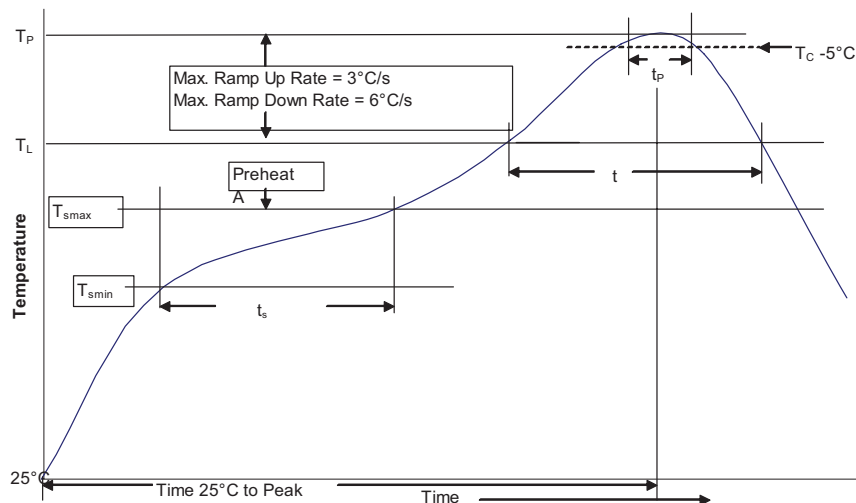


Table 1 - Standard SnPb Solder (T_c)

| Package Thickness | Volume mm^3 <350 | Volume mm^3 ≥ 350 |
|---------------------|---------------------------|---------------------------------|
| <2.5mm | 235°C | 220°C |
| $\geq 2.5\text{mm}$ | 220°C | 220°C |

Table 2 - Lead (Pb) Free Solder (T_c)

| Package Thickness | Volume mm^3 <350 | Volume mm^3 350 - 2000 | Volume mm^3 >2000 |
|-------------------|---------------------------|---------------------------------|----------------------------|
| <1.6mm | 260°C | 260°C | 260°C |
| 1.6 - 2.5mm | 260°C | 250°C | 245°C |
| >2.5mm | 250°C | 245°C | 245°C |

Reference JDEC J-STD-020

| Profile Feature | Standard SnPb Solder | Lead (Pb) Free Solder |
|--|----------------------|-----------------------|
| Preheat and Soak | | |
| • Temperature min. (T_{smin}) | 100°C | 150°C |
| • Temperature max. (T_{smax}) | 150°C | 200°C |
| • Time (T_{smin} to T_{smax}) (t_s) | 60-120 Seconds | 60-120 Seconds |
| Average ramp up rate T_{smax} to T_p | 3°C/ Second Max. | 3°C/ Second Max. |
| Liquidous temperature (T_L) | 183°C | 217°C |
| Time at liquidous (t_L) | 60-150 Seconds | 60-150 Seconds |
| Peak package body temperature (T_p)* | Table 1 | Table 2 |
| Time (t_p)** within 5 °C of the specified classification temperature (T_c) | 20 Seconds** | 30 Seconds** |
| Average ramp-down rate (T_p to T_{smax}) | 6°C/ Second Max. | 6°C/ Second Max. |
| Time 25°C to Peak Temperature | 6 Minutes Max. | 8 Minutes Max. |

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. DS4308
August 2017