



## 2 Amp To 4 Amp Standard Recovery Rectifiers

### DESCRIPTION

High average power and surge capability make these series of devices attractive in many high-reliability applications. All Microsemi rectifiers have a sleeve of pure hard glass fused to the silicon junction. Since the silicon sees only this glass, electrical characteristics are permanently stable. This voidless, monolithic package is totally unaffected by the most severe moisture or temperature testing. Consult factory for surface mount option.

**Important:** For the latest information, visit our website <http://www.microsemi.com>.

### FEATURES

- Miniature voidless hermetically sealed glass package.
- Continuous current ratings up to 4 amps.
- Extremely robust construction.
- Internal "Category 1" metallurgical bonds.
- RoHS compliant versions available.

### APPLICATIONS / BENEFITS

- Standard recovery 2 amp to 4 amp rectifier series with a  $V_{RWM}$  range from 50 to 600 V.
- Surge current rating to 100 amps.
- Low thermal resistance.
- Controlled avalanche breakdown with peak reverse power capability.
- Inherently radiation hard as described in Microsemi [MicroNote 050](#).

### MAXIMUM RATINGS @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameters/Test Conditions	Symbol	Value	Unit	
Junction Temperature	$T_J$	-65 to +175	$^\circ\text{C}$	
Storage Temperature	$T_{STG}$	-65 to +200	$^\circ\text{C}$	
Thermal Resistance Junction-to-Lead <sup>(1)</sup>	$R_{\theta JL}$	See <a href="#">Derating Curves</a>		
Working Peak Reverse Voltage: <b>2 Amp 3 Amp 4 Amp</b>	$V_{RWM}$		V	
UT2005, UT3005, UT4005		50		
UT2010, UT3010, UT4010		100		
UT2020, UT3020, UT4020		200		
UT2040, UT3040, UT4040		400		
UT2060, UT3060, UT4060	600			
Forward Surge Current (Peak) @ 8.3 ms	$I_{FSM}$	2 Amp Series	A	
		3 Amp Series		60
		4 Amp Series		80
Average Rectified Output Current @ $T_L = +25^\circ\text{C}$	$I_{O1}$	2 Amp Series	A	
		3 Amp Series		2.0
		4 Amp Series		3.0
Average Rectified Output-Current @ $T_A = +100^\circ\text{C}$	$I_{O2}$	2 Amp Series	A	
		3 Amp Series		1.0
		4 Amp Series		1.5
Solder Temperature @ 10 s	$T_{SP}$	260	$^\circ\text{C}$	

**NOTE:** 1. At 0.375 inch (9.53 mm) lead length from body.



**"B" Package**

#### MSC – Lawrence

6 Lake Street,  
Lawrence, MA 01841  
Tel: 1-800-446-1158 or  
(978) 620-2600  
Fax: (978) 689-0803

#### MSC – Ireland

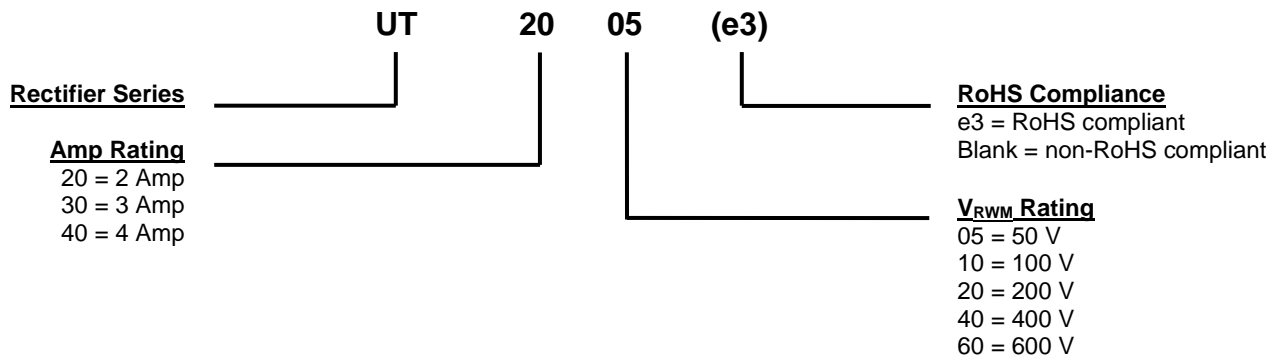
Gort Road Business Park,  
Ennis, Co. Clare, Ireland  
Tel: +353 (0) 65 6840044  
Fax: +353 (0) 65 6822298

**Website:**

[www.microsemi.com](http://www.microsemi.com)

**MECHANICAL and PACKAGING**

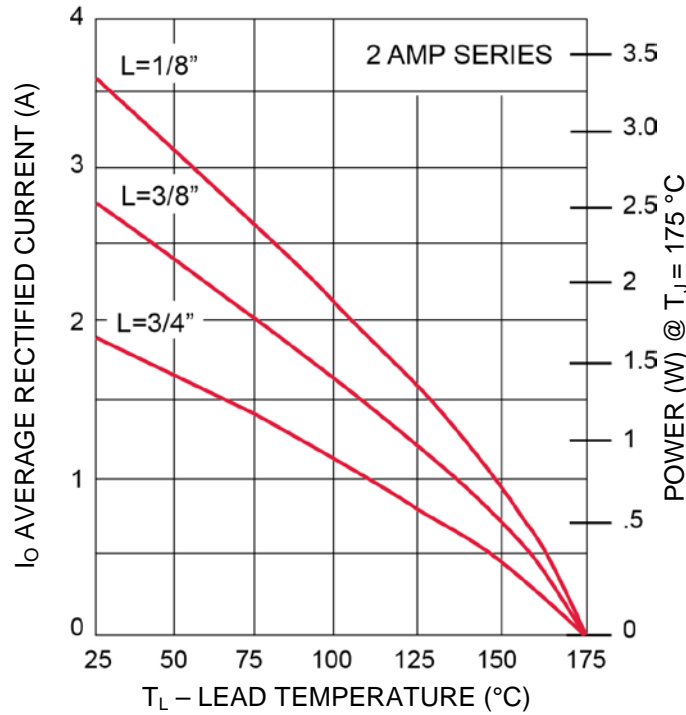
- CASE: Hermetically sealed voidless hard glass with tungsten slugs.
- TERMINALS: Tin/lead or RoHS compliant matte/tin over nickel plate over copper.
- MARKING: Orange band indicates “UT”, part number printed on body.
- POLARITY: Indicated by orange band.
- TAPE & REEL option: Standard per EIA-296. Consult factory for quantities.
- WEIGHT: 0.75 grams approximate.
- See [Package Dimensions](#) on last page.

**PART NOMENCLATURE**

**SYMBOLS & DEFINITIONS**

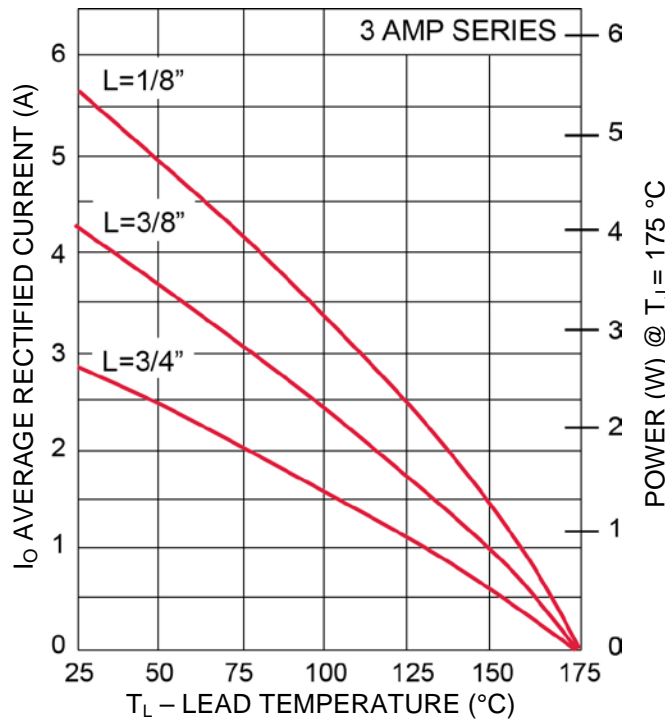
Symbol	Definition
$I_F$	Forward Current: The forward current dc value, no alternating component.
$I_{FSM}$	Maximum Forward Surge Current: The forward current, surge peak or rated forward surge current.
$I_O$	Average Rectified Output Current: Output current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle.
$T_J$	Junction Temperature: The temperature of a semiconductor junction.
$V_F$	Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current.
$V_{RWM}$	Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range.

**ELECTRICAL CHARACTERISTICS @ 25°C unless otherwise noted**

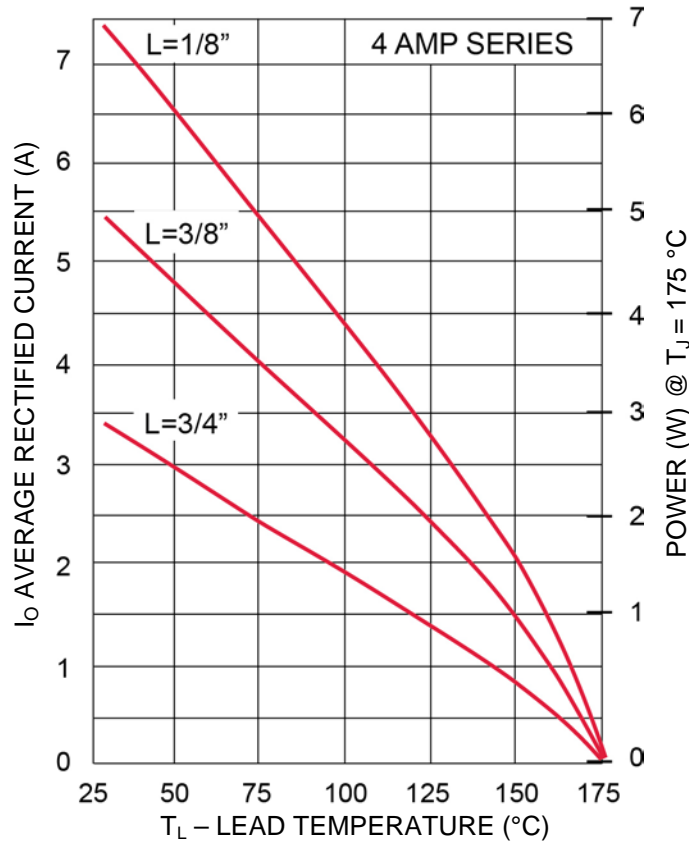
TYPE	WORKING PEAK REVERSE VOLTAGE $V_{RWM}$	MAXIMUM FORWARD VOLTAGE DROP	MAXIMUM LEAKAGE CURRENT @ $V_{RWM}$	
	Volts	Volts	$\mu A$	
			25 °C	125 °C
UT4005	50	1 V @ 3 A	5	100
UT4010	100			
UT4020	200			
UT4040	400			
UT4060	600			
UT3005	50	1 V @ 2 A	5	100
UT3010	100			
UT3020	200			
UT3040	400			
UT3060	600			
UT2005	50	1 V @ 1 A	5	100
UT2010	100			
UT2020	200			
UT2040	400			
UT2060	600			

**GRAPHS**


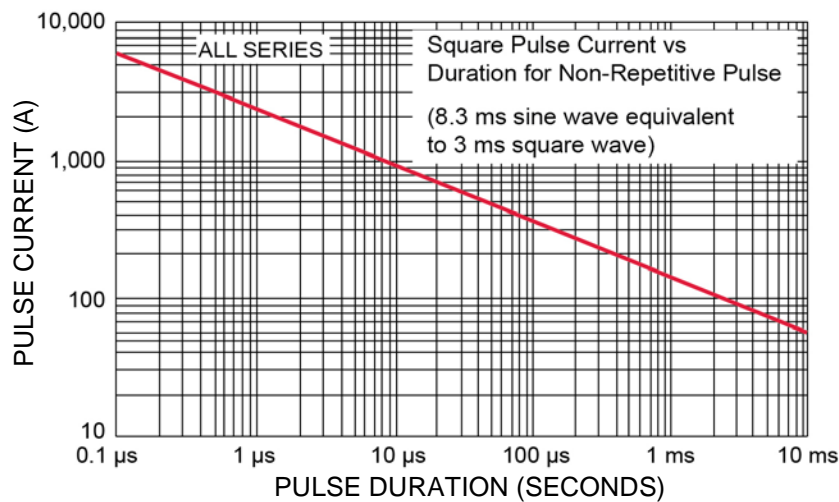
**FIGURE 1**  
Maximum Current vs Lead Temperature



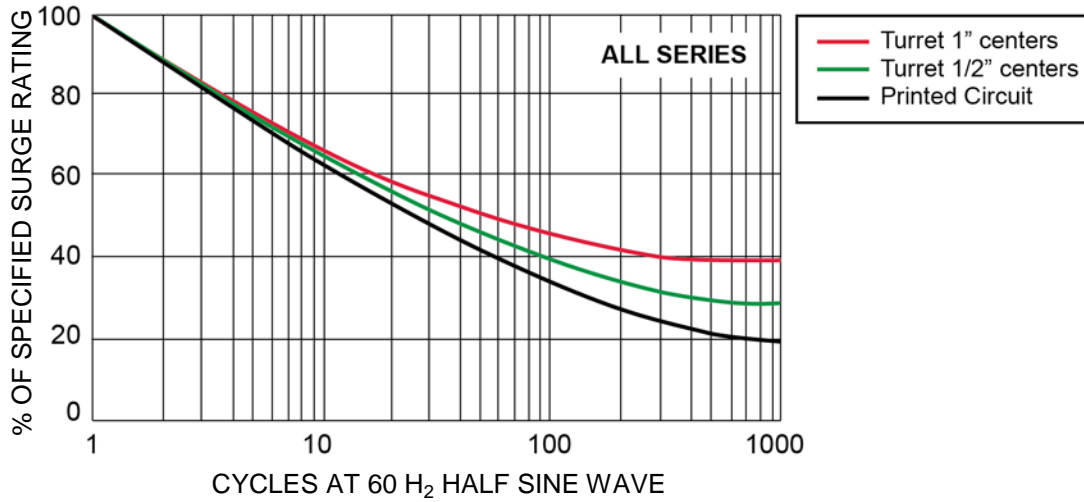
**FIGURE 2**  
Maximum Current vs Lead Temperature

**GRAPHS**


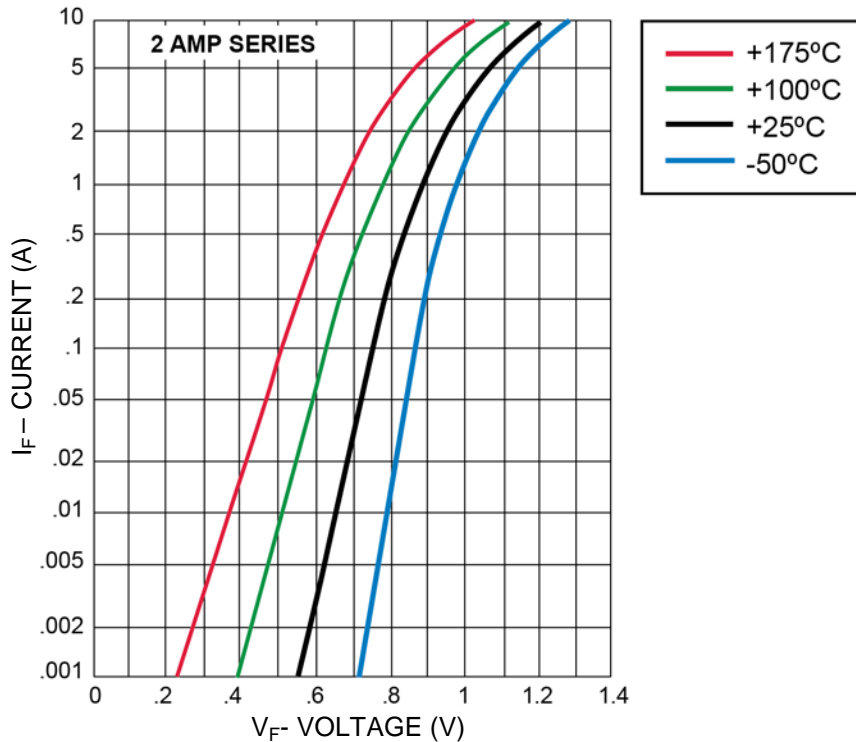
**FIGURE 3**  
Maximum Current vs Lead Temperature



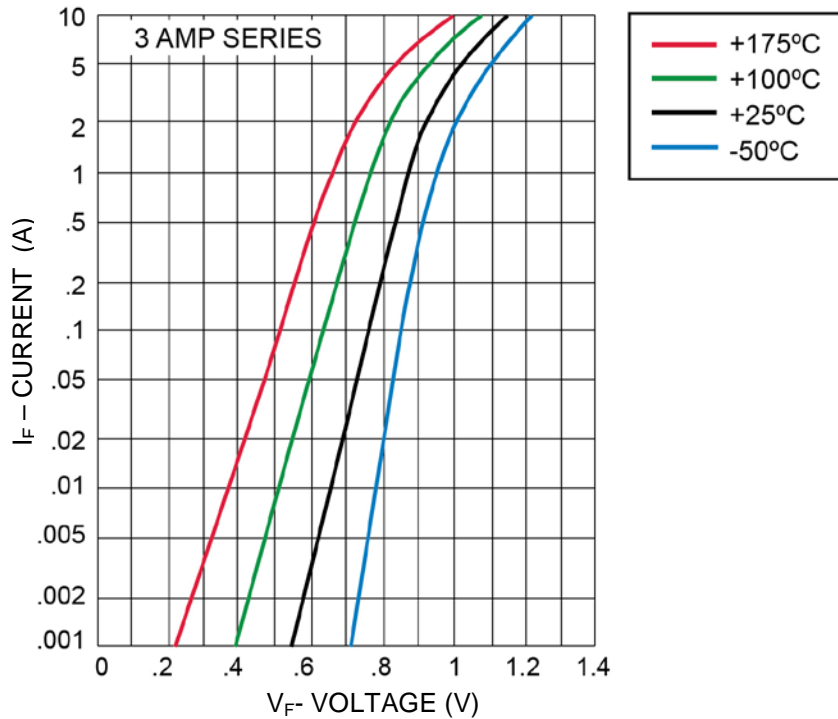
**FIGURE 4**  
Forward Pulse Current vs Pulse Duration

**GRAPHS**


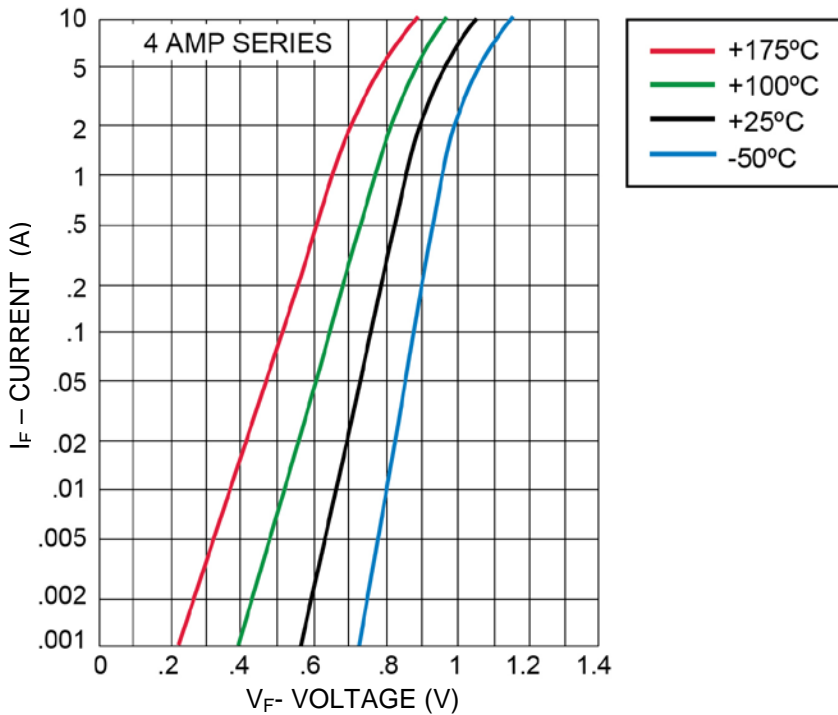
**FIGURE 5**  
Allowable Forward Surge vs Number of Cycles



**FIGURE 6**  
Typical Forward Current vs Forward Voltage

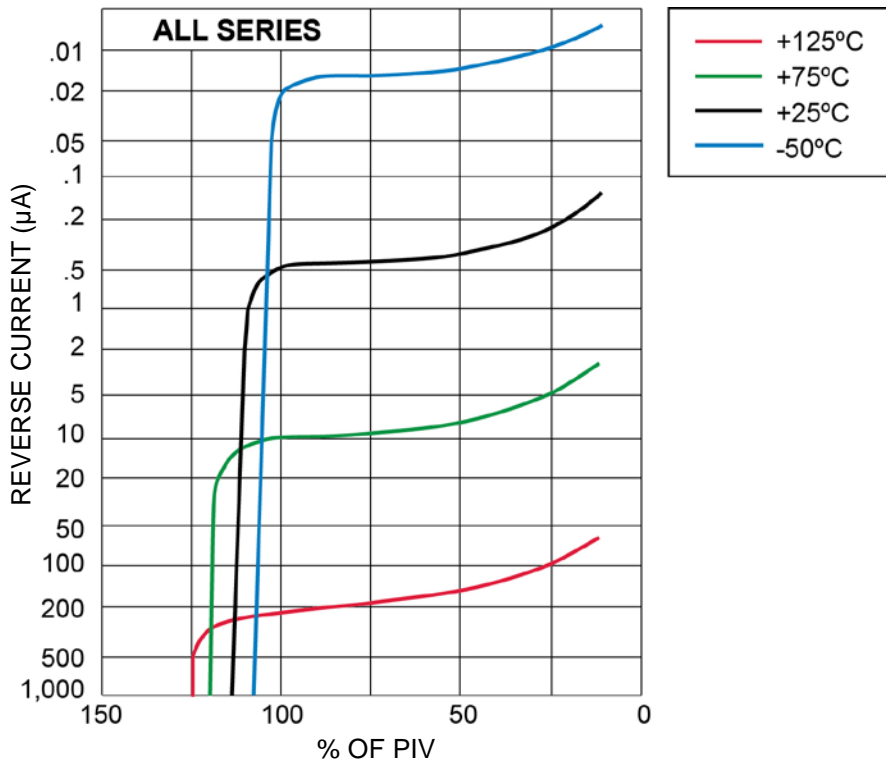
**GRAPHS**


**FIGURE 7**  
Typical Forward Current vs Forward Voltage

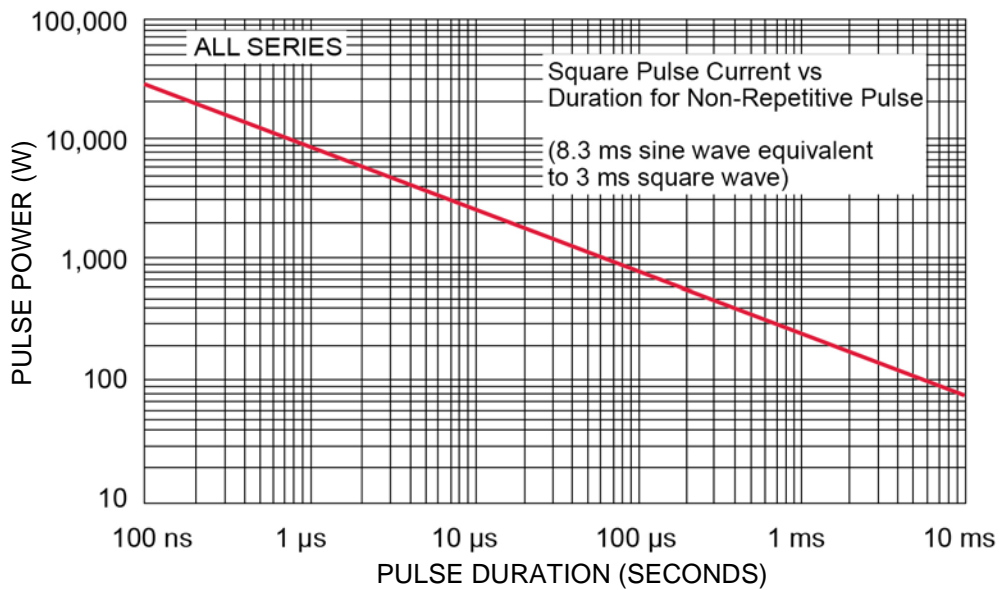


**FIGURE 8**  
Typical Forward Current vs Forward Voltage

## GRAPHS

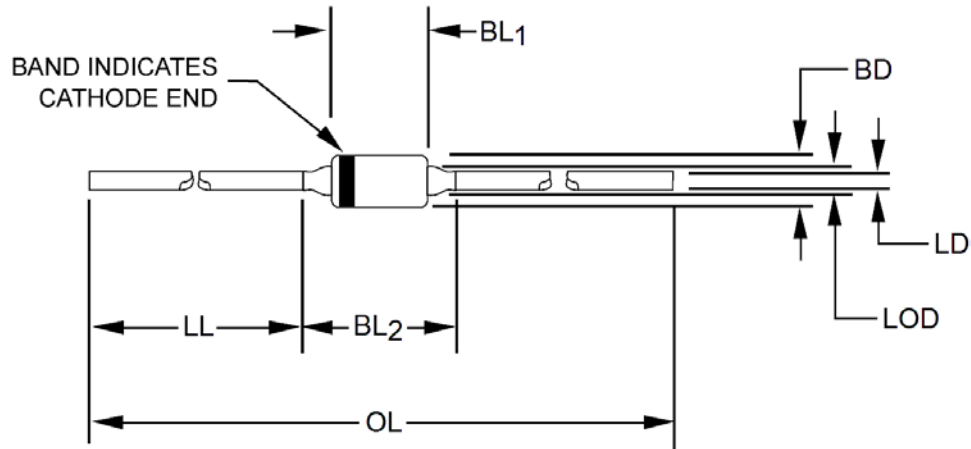

**FIGURE 9**

Typical Reverse Current vs Working Peak Reverse Voltage


**FIGURE 10**

Reverse Pulse Power vs Pulse Duration



**PACKAGE DIMENSIONS**

**NOTES:**

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Dimension  $BL_2$  shall include the entire body including slugs and sections of the lead over which the diameter is uncontrolled. This uncontrolled area is defined as the zone between the edge of the diode body and extending .050 inch (1.27 mm) onto the leads.
4. Dimension  $BD$  shall be measured at the largest diameter.
5. In accordance with ASME Y14.5M, diameters are equivalent to  $\Phi$ x symbology.

Ltr	DIMENSIONS				Notes
	INCH		MILLIMETERS		
	Min	Max	Min	Max	
<b>BD</b>	0.115	0.145	2.92	3.68	4
<b>BL<sub>1</sub></b>	.175 TYP		4.4 TYP		
<b>BL<sub>2</sub></b>	0.150	0.300	3.81	7.62	3
<b>LD</b>	.039	.041	.99	1.05	3
<b>LL</b>	.975	--	24.8	--	
<b>LOD</b>	.115 TYP		2.9 TYP		
<b>OL</b>	2.30	--	58.4	--	