

Features

- N-Channel, 5V Logic Level Control
- Enhancement mode
- Very low on-resistance $R_{DS(on)}$ @ $V_{GS}=4.5\text{ V}$
- 100% Avalanche test
- Pb-free lead plating; RoHS compliant




Halogen-Free


Part ID	Package Type	Marking	Tape and reel information
VSD007NE4MS	TO-252	007NE4M	2500PCS/Reel

V_{DS}	45	V
$R_{DS(on),TYP@ V_{GS}=10\text{ V}}$	5.8	mΩ
$R_{DS(on),TYP@ V_{GS}=4.5\text{ V}}$	7.1	mΩ
I_D	72	A

TO-252



Drain Pin 2



Maximum ratings, at $T_J=25^{\circ}\text{C}$, unless otherwise specified

Symbol	Parameter		Rating	Unit
$V_{(BR)DSS}$	Drain-Source breakdown voltage		45	V
I_S	Diode continuous forward current	$T_C=25^{\circ}\text{C}$	72	A
I_D	Continuous drain current @ $V_{GS}=10\text{V}$	$T_C=25^{\circ}\text{C}$	72	A
		$T_C=100^{\circ}\text{C}$	46	A
I_{DM}	Pulse drain current tested ①	$T_C=25^{\circ}\text{C}$	288	A
EAS	Avalanche energy, single pulsed ②		31	mJ
P_D	Maximum power dissipation	$T_C=25^{\circ}\text{C}$	61	W
V_{GS}	Gate-Source voltage		± 20	V
$T_{STG} T_J$	Storage and operating temperature range		-55 to 150	$^{\circ}\text{C}$

Thermal Characteristics

Symbol	Parameter	Typical	Unit
$R_{\theta JC}$	Thermal Resistance- Junction to Case	2.05	$^{\circ}\text{C/W}$
$R_{\theta JA}$	Thermal Resistance- Junction to Ambient	100	$^{\circ}\text{C/W}$

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ T _c = 25°C (unless otherwise stated)						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	45	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current(T _c =25°C)	V _{DS} =40V,V _{GS} =0V	--	--	1	μA
	Zero Gate Voltage Drain Current(T _c =125°C)	V _{DS} =40V,V _{GS} =0V	--	--	100	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V,V _{DS} =0V	--	--	±100	nA
V _{GS(TH)}	Gate Threshold Voltage	V _{DS} =V _{GS} ,I _D =250μA	1	--	2.5	V
R _{DS(ON)}	Drain-Source On-State Resistance③	V _{GS} =10V, I _D =40A	--	5.8	7	mΩ
R _{DS(ON)}	Drain-Source On-State Resistance③	V _{GS} =4.5V, I _D =20A	--	7.1	9	mΩ
Dynamic Electrical Characteristics @ T _c = 25°C (unless otherwise stated)						
C _{iss}	Input Capacitance	V _{DS} =20V,V _{GS} =0V, f=1MHz	--	1945	--	pF
C _{oss}	Output Capacitance		--	330	--	pF
C _{rss}	Reverse Transfer Capacitance		--	320	--	pF
R _g	Gate Resistance	f=1MHz	--	2.6	--	Ω
Q _g	Total Gate Charge	V _{DS} =20V,I _D =40A, V _{GS} =10V	--	32	--	nC
Q _{gs}	Gate-Source Charge		--	6.1	--	nC
Q _{gd}	Gate-Drain Charge		--	12	--	nC
Switching Characteristics						
t _{d(on)}	Turn-on Delay Time	V _{DD} =20V, I _D =40A, R _G =3.0Ω, V _{GS} =10V	--	13	--	nS
t _r	Turn-on Rise Time		--	10.8	--	nS
t _{d(off)}	Turn-Off Delay Time		--	26	--	nS
t _f	Turn-Off Fall Time		--	14	--	nS
Source- Drain Diode Characteristics@ T _c = 25°C (unless otherwise stated)						
V _{SD}	Forward on voltage	I _{SD} =40A,V _{GS} =0V	--	0.9	1.2	V
t _{rr}	Reverse Recovery Time	T _j =25°C,I _{sd} =40A, V _{GS} =0V	--	32	--	nS
Q _{rr}	Reverse Recovery Charge	di/dt=100A/μs		24		nC

NOTE:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Limited by T_{Jmax}, starting T_J = 25°C, L = 0.1mH, R_G = 25Ω, I_{AS} = 25A, V_{GS} = 10V. Part not recommended for use above this value
- ③ Pulse width ≤ 300μs; duty cycle ≤ 2%.

Typical Characteristics

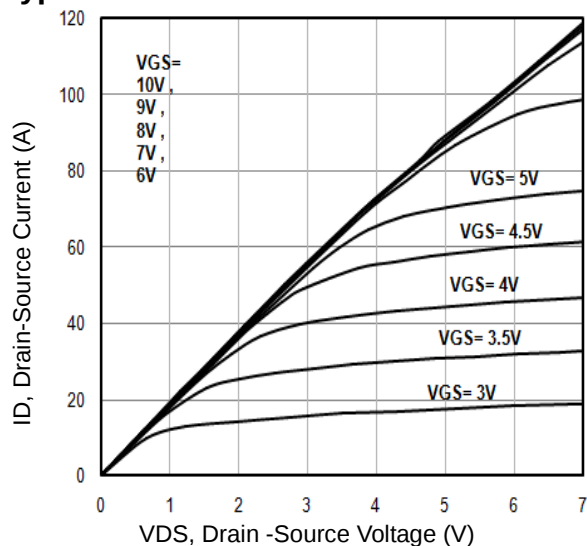


Fig1. Typical Output Characteristics

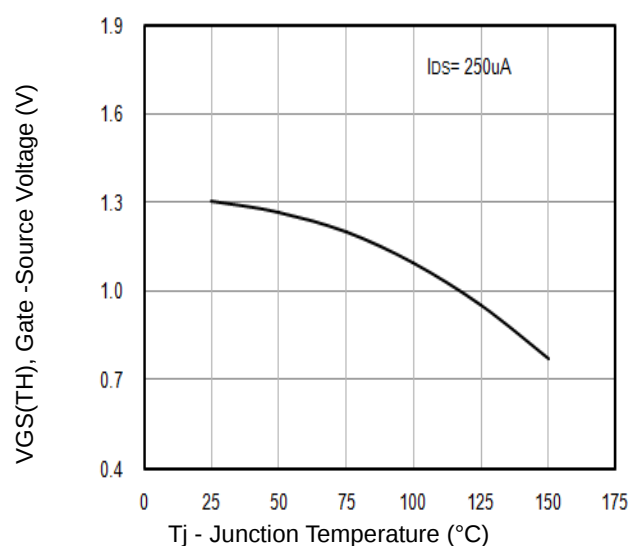


Fig2. $V_{GS(TH)}$ Gate-Source Voltage Vs. T_j

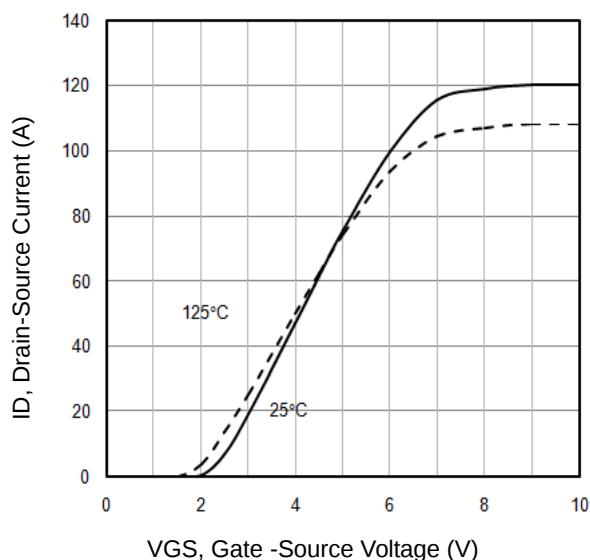


Fig3. Typical Transfer Characteristics

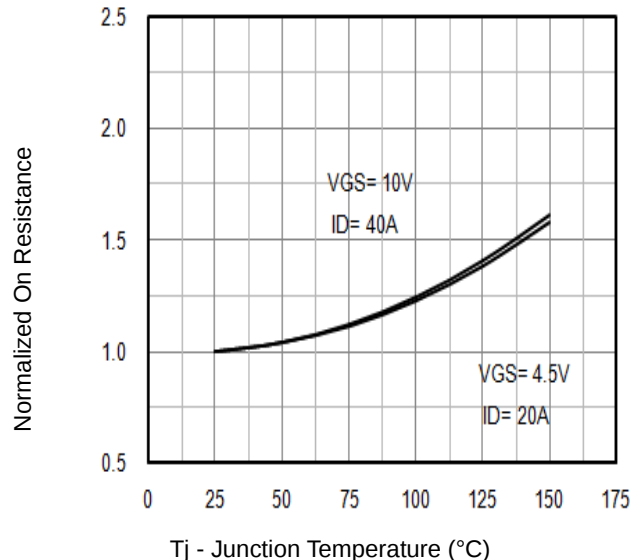


Fig4. Normalized On-Resistance Vs. T_j

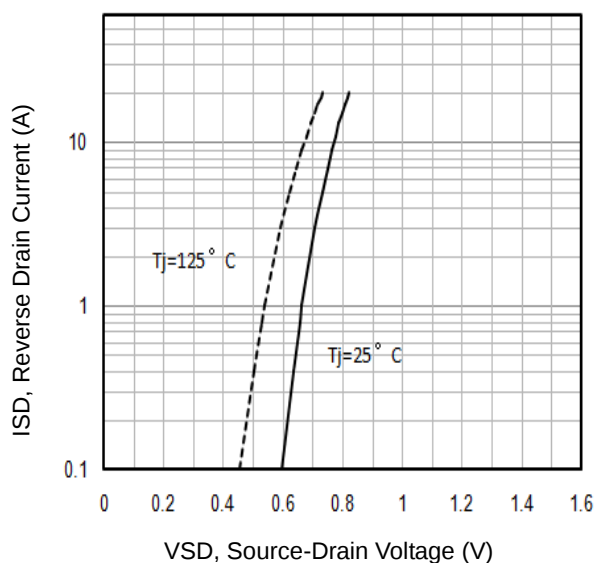


Fig5. Typical Source-Drain Diode Forward Voltage







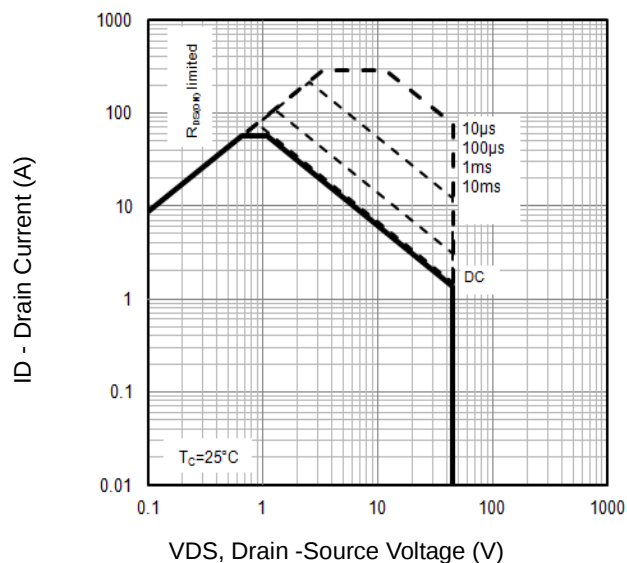


Fig6. Maximum Safe Operating Area

Typical Characteristics

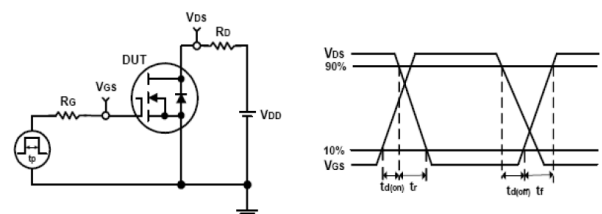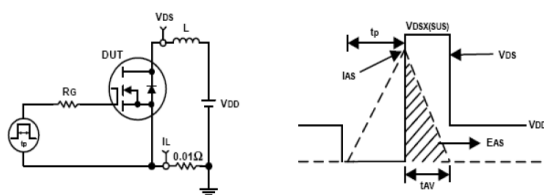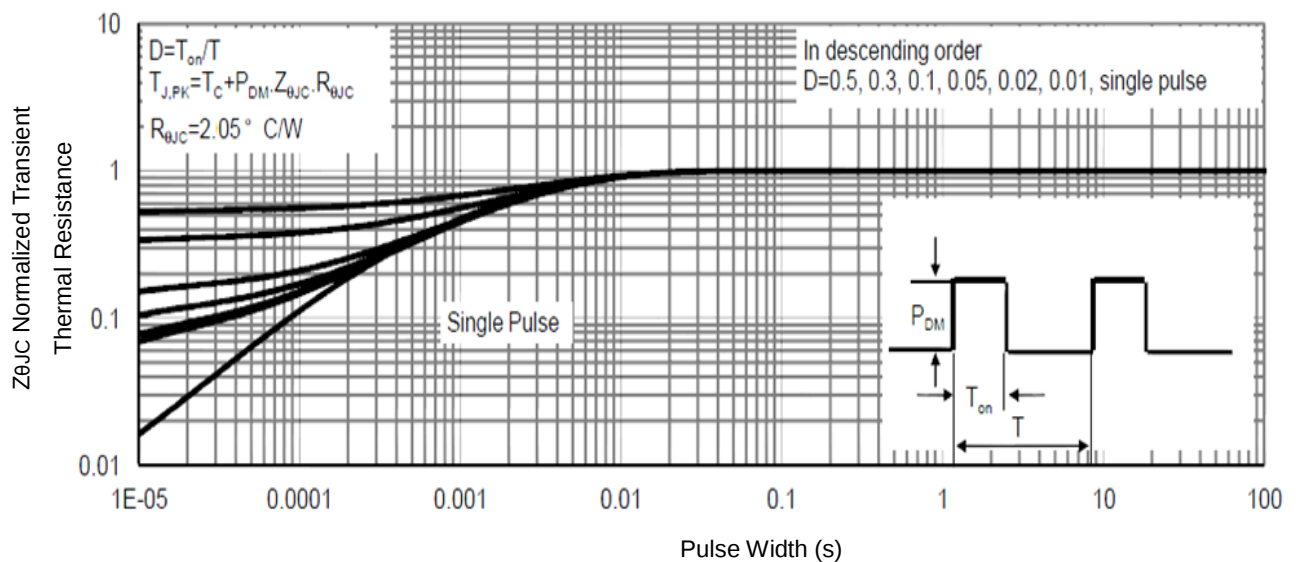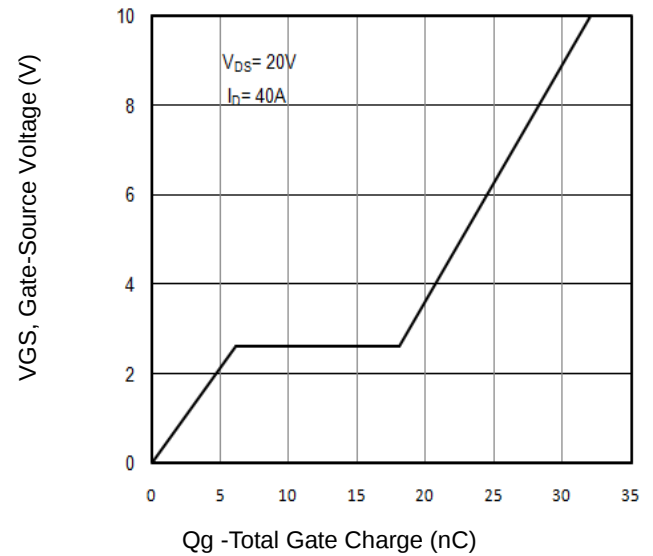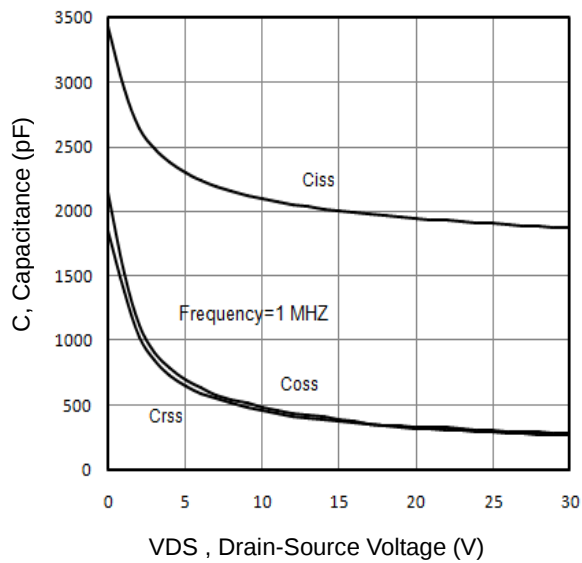

TO-252 Package Outline Data

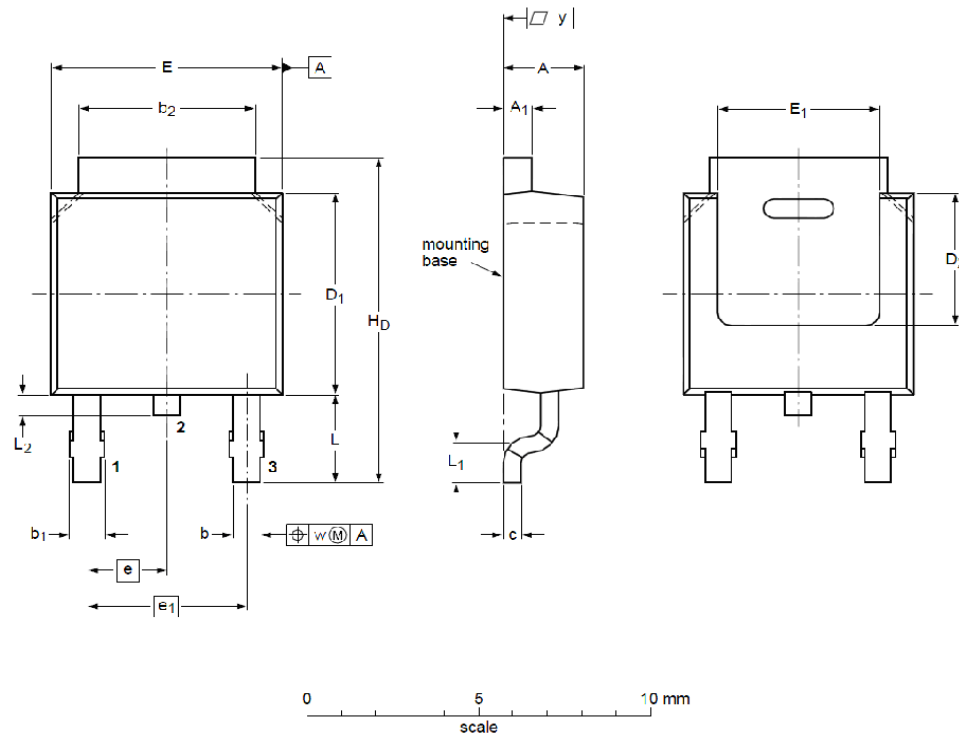

DIMENSIONS (unit : mm)

Symbol	Min	Typ	Max	Symbol	Min	Typ	Max
A	2.22	2.30	2.38	A ₁	0.46	0.58	0.93
b	0.71	0.79	0.89	b ₁	0.90	0.98	1.10
b ₂	5.00	5.30	5.46	c	0.20	0.40	0.56
D ₁	5.98	6.05	6.22	D ₂	--	4.00	--
E	6.47	6.60	6.73	E ₁	5.10	5.28	5.45
e	--	2.28	--	e ₁	--	4.57	--
H _D	9.60	10.08	10.40	L	2.75	2.95	3.05
L ₁	--	0.50	--	L ₂	0.80	0.90	1.10
w	--	0.20	--	y	0.20	--	--

Customer Service

Sales and Service:

sales@vgsemi.com

Vanguard Semiconductor CO., LTD

TEL: (86-755) -26902410

FAX: (86-755) -26907027

WEB: www.vgsemi.com