


Features

- 2.5x0.7x1.0mm right angle SMD LED
- Ideal for indication on hand held products
- Low current operation
- Standard Package: 3,000pcs/ Reel
- MSL (Moisture Sensitivity Level): 3
- RoHS compliant



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

Package Schematics

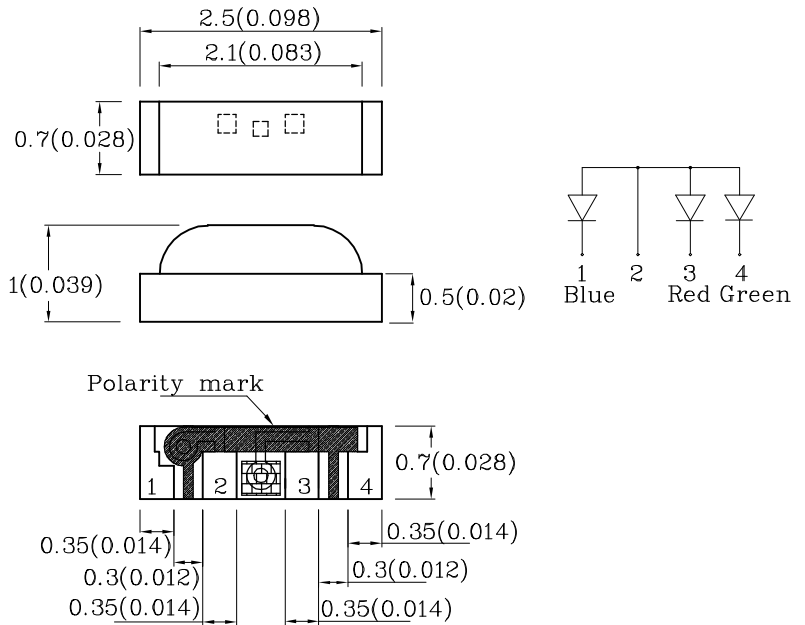

Notes:


1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.15(0.006)$ " unless otherwise noted.
3. Specifications are subject to change without notice.

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$)		Blue (InGa N)	Red (AlGaI nP)	Green (InGa N)	Unit	Operating Characteristics ($T_A=25^\circ\text{C}$)		Blue (InGa N)	Red (AlGaI nP)	Green (InGa N)	Unit
Reverse Voltage	V_R	5	5	5	V	Forward Voltage (Typ.) ($I_F=20\text{mA}$)	V_F	3.3	2	3.3	V
Forward Current	I_F	30	30	25	mA	Forward Voltage (Max.) ($I_F=20\text{mA}$)	V_F	4	2.5	4.1	V
Forward Current (Peak) 1/10 Duty Cycle 0.1ms Pulse Width	i_{FS}	150	195	150	mA	Reverse Current (Max.) ($V_R=5\text{V}$)	I_R	50	10	50	μA
Power Dissipation	P_D	120	75	102.5	mW	Wavelength of Peak Emission CIE127-2007*(Typ.) ($I_F=20\text{mA}$)	λ_P	460*	630*	515*	nm
Electrostatic Discharge Threshold (HBM)		250	3000	450	V	Wavelength of Dominant Emission CIE127-2007* (Typ.) ($I_F=20\text{mA}$)	λ_D	465*	621*	525*	nm
Operating Temperature	T_A	-40 ~ +85			$^\circ\text{C}$	Spectral Line Full Width At Half-Maximum (Typ.) ($I_F=20\text{mA}$)	$\Delta\lambda$	25	20	35	nm
Storage Temperature	T_{stg}					Capacitance (Typ.) ($V_F=0\text{V}$, $f=1\text{MHz}$)	C	100	25	45	pF


A Relative Humidity between 40% and 60% is recommended in ESD-protected work areas to reduce static build up during assembly process (Reference JEDEC/JESD625-A and JEDEC/J-STD-033)

Part Number	Emitting Color	Emitting Material	Lens-color	Luminous Intensity CIE127-2007* ($I_F=20\text{mA}$) mcd		Wavelength CIE127-2007* nm λ_P	Viewing Angle 2 θ 1/2
				min.	typ.		
XZCBDMEDGK161W	Blue	InGaN	Water Clear	40*	64*	460*	130°
	Red	AlGaInP		80*	108*	630*	
	Green	InGaN		200*	397*	515*	

*Luminous intensity value and wavelength are in accordance with CIE127-2007 standards.

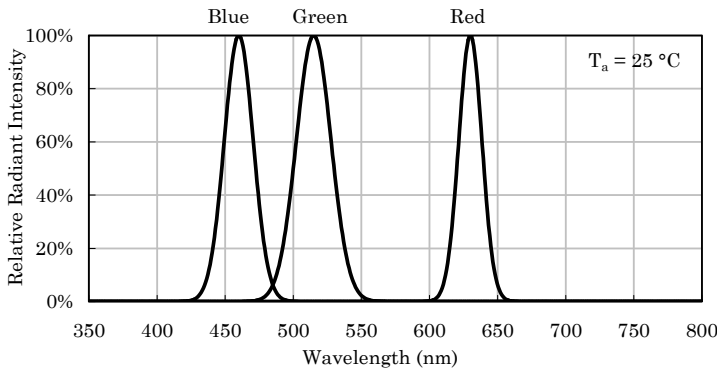


Relative Intensity Vs. CIE Wavelength

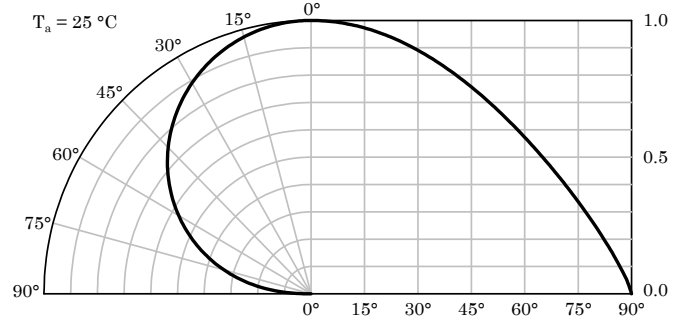


Spatial Distribution


❖ Blue

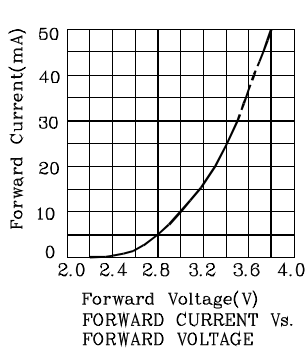


Forward Voltage (V) vs. Forward Current (mA) for Blue LED

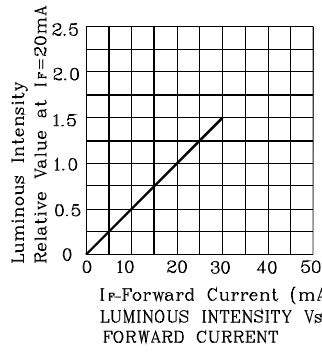

I_f -Forward Current (mA) vs. Luminous Intensity (Relative Value at $I_f = 20\text{mA}$) for Blue LED




Ambient Temperature T_a (°C) vs. Forward Current (mA) Derating Curve for Blue LED

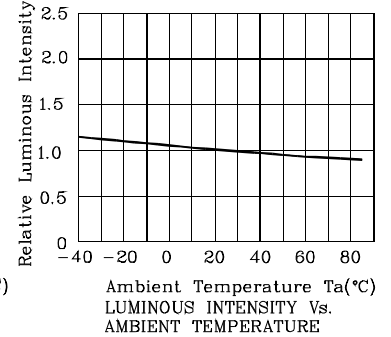


Ambient Temperature T_a (°C) vs. Relative Luminous Intensity for Blue LED


❖ Red




Forward Voltage (V) vs. Forward Current (mA) for Red LED



I_f -Forward Current (mA) vs. Luminous Intensity (Relative Value at $I_f = 20\text{mA}$) for Red LED




Ambient Temperature T_a (°C) vs. Forward Current (mA) Derating Curve for Red LED

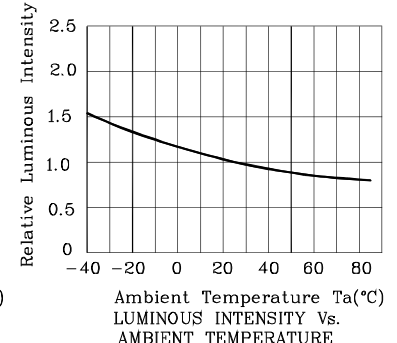


Ambient Temperature T_a (°C) vs. Relative Luminous Intensity for Red LED


❖ Green




Forward Voltage (V) vs. Forward Current (mA) for Green LED



I_f -Forward Current (mA) vs. Luminous Intensity (Relative Value at $I_f = 20\text{mA}$) for Green LED




Ambient Temperature T_a (°C) vs. Forward Current (mA) Derating Curve for Green LED

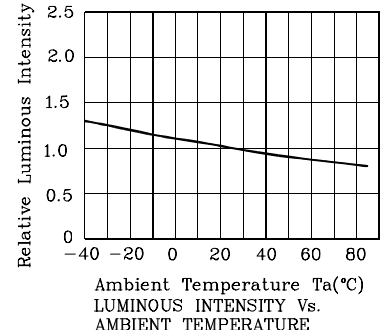

Ambient Temperature T_a (°C) vs. Relative Luminous Intensity for Green LED

❖ LED is recommended for reflow soldering and soldering profile is shown below.


Reflow Soldering Profile for SMD Products (Pb-Free Components)

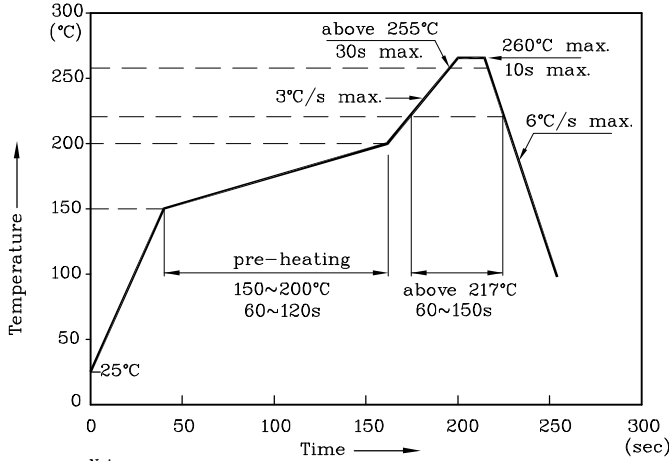


Notes:

1. All temperatures refer to the center of the package, measured on the package body surface facing up during reflow.
2. Do not apply any stress to the LED during high temperature conditions.
3. Maximum number of soldering passes: 2


❖ The device has a single mounting surface. The device must be mounted according to the specifications.

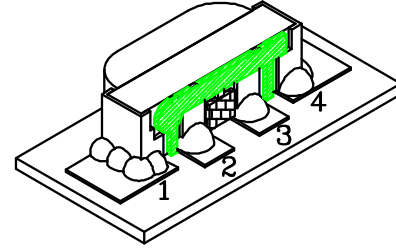


❖ Recommended Soldering Pattern (Units : mm; Tolerance: ± 0.1)

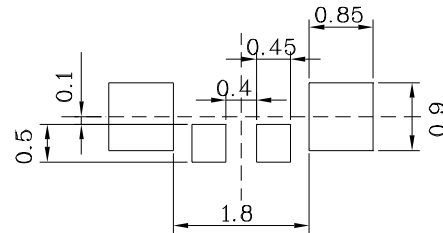

❖ Tape Specification (Units : mm)

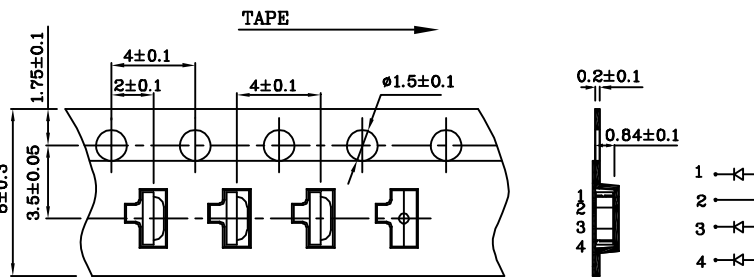

❖ Reel Dimension

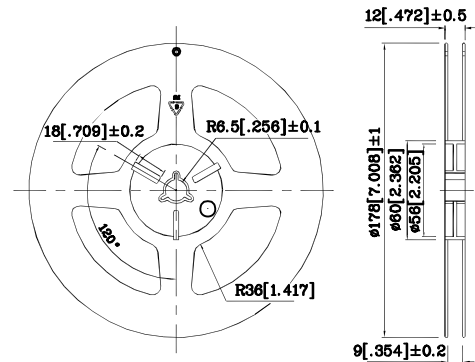




Remarks:

If special sorting is required (e.g. binning based on forward voltage, Luminous intensity / luminous flux, or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous intensity / luminous flux: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

PACKING & LABEL SPECIFICATIONS

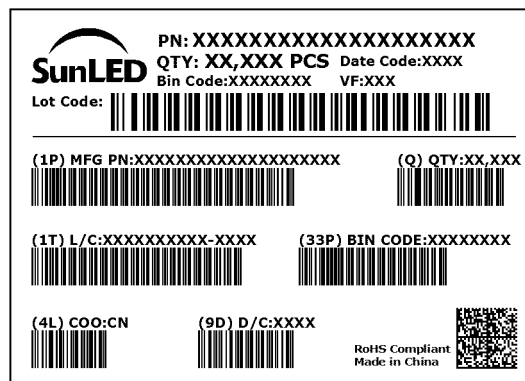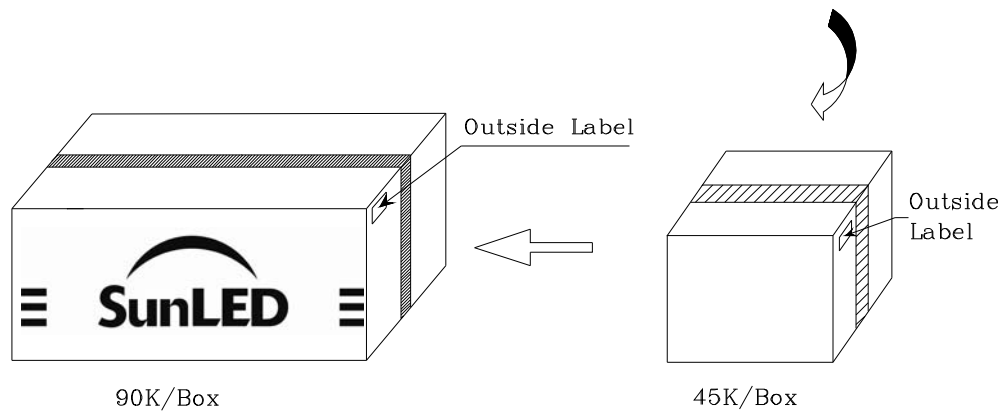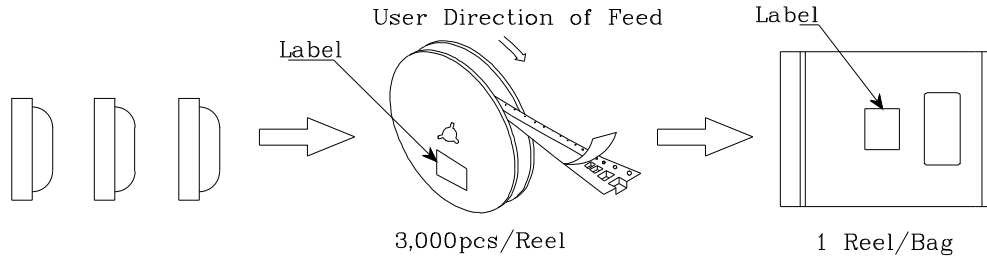

TERMS OF USE

1. Data presented in this document reflect statistical figures and should be treated as technical reference only.
2. Contents within this document are subject to improvement and enhancement changes without notice.
3. The product(s) in this document are designed to be operated within the electrical and environmental specifications indicated on the datasheet.
User accepts full risk and responsibility when operating the product(s) beyond their intended specifications.
4. The product(s) described in this document are intended for electronic applications in which a person's life is not reliant upon the LED. Please consult with a SunLED representative for special applications where the LED may have a direct impact on a person's life.
5. The contents within this document may not be altered without prior consent by SunLED.
6. Additional technical notes are available at <http://www.SunLEDusa.com/TechnicalNotes.asp>