


# 2,500 V - 10,000 V Rectifiers

0.50 A - 1.5 A Forward Current  
200 ns Recovery Time

**Z25FG**  
**Z50FG**  
**Z100FG**

AXIAL LEADED  
HERMETICALLY SEALED




**4**

## ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V <sub>rwm</sub> )	Average Rectified Current (I <sub>o</sub> )		Reverse Current @ V <sub>rwm</sub> (I <sub>r</sub> )		Forward Voltage (V <sub>f</sub> )		1 Cycle Surge Current t <sub>p</sub> =8.3ms (I <sub>fsm</sub> )	Repetitive Surge Current (I <sub>frm</sub> )	Reverse Recovery Time (3) (T <sub>rr</sub> )	Thermal Impedance θ <sub>J-L</sub>			Junction Cap. @50VDC @ 1kHz (C <sub>j</sub> )
		55°C(1)	100°C(2)	25°C	100°C	25°C					L=000	L=.125	L=.250	
		Amps	Amps	µA	µA	Volts	Amps				°C/W	°C/W	°C/W	
Z25FG	2500	1.50	1.00	1.0	25	6.5	2.00	60	10	200	3	6	12	20
Z50FG	5000	1.00	0.50	1.0	25	9.5	1.00	40	8	200	3	6	12	16
Z100FG	10000	0.50	0.25	1.0	25	13.0	0.60	25	5	200	3	6	12	8

(1)TL=55°C L=0.375" (2)TL=100°C L=0.375" (3)I<sub>f</sub>=0.5A, I<sub>r</sub>=1.0A, I<sub>rr</sub>=0.25A • Op.Temp.= -65°C to +175°C Stg.Temp.= -65°C to +200°C

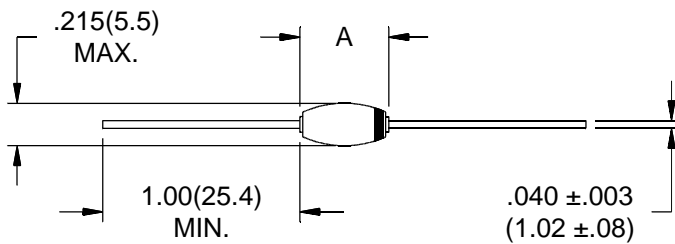

Part	A
Z25FG	.350(8.89) MAX.
Z50FG	.350(8.89) MAX.
Z100FG	.400(10.16) MAX.



Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



**VOLTAGE MULTIPLIERS INC.**  
8711 W. Roosevelt Ave.  
Visalia, CA 93291

TEL 559-651-1402  
FAX 559-651-0740  
www.voltagemultipliers.com

# Z25FG Z50FG Z100FG

