




PC 1601-K

液晶之友 电话: 020-33819057  
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

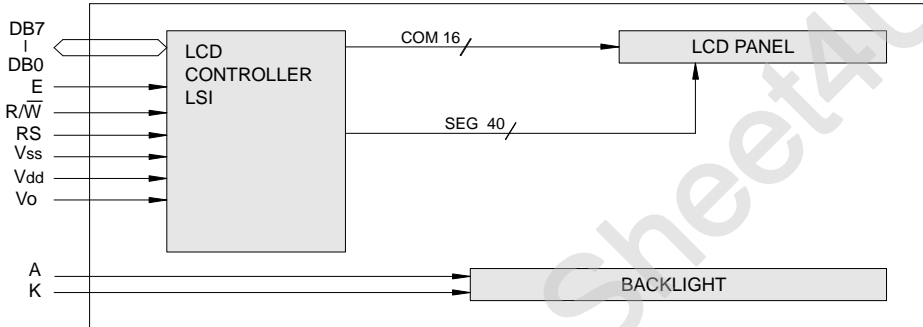

OUTLINE DIMENSION & BLOCK DIAGRAM

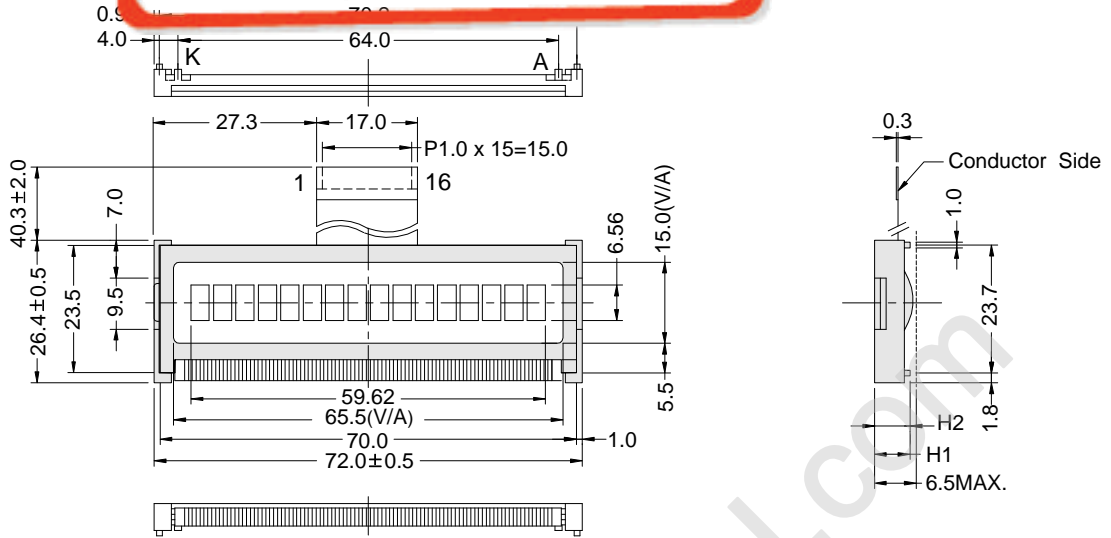

The tolerance unless classified  $\pm 0.3\text{mm}$

MECHANICAL SPECIFICATION			
Overall Size	72.5 x 26.4	Module	H2 / H1
View Area	65.5 x 15.0	W / O B/L	- / 2.6
Dot Size	0.55 x 0.75	EL B/L	- / -
Dot Pitch	0.63 x 0.83	LED B/L	5.0 / 6.0

PIN ASSIGNMENT		
Pin no.	Symbol	Function
1	Vss	Power supply(GND)
2	Vdd	Power supply(+)
3	Vo	Contrast Adjust
4	RS	Register select signal
5	R/W	Data read / write
6	E	Enable signal
7	DB0	Data bus line
8	DB1	Data bus line
9	DB2	Data bus line
10	DB3	Data bus line
11	DB4	Data bus line
12	DB5	Data bus line
13	DB6	Data bus line
14	DB7	Data bus line
15	A/NC	Power supply for LED B/L (+)
16	K/NC	Power supply for LED B/L (-)

ABSOLUTE MAXIMUM RATING									
Item	Symbol	Condition	Min.	Max.	Units				
Supply for logic voltage	Vdd-Vss	25°C	-0.3	7	V				
LCD driving supply voltage	Vdd-Vee	25°C	-0.3	13	V				
Input voltage	Vin	25°C	-0.3	Vdd+0.3	V				
ELECTRICAL CHARACTERISTICS									
Item	Symbol	Condition	Min.	Typical	Max.	Units			
Power supply voltage	Vdd-Vss	25°C	2.7	-	5.5	V			
LCD operation voltage	Vop	Top	N	W	N	W	V		
		-20°C	- 4.5	- 5.7	- 5.8	-	V		
		0°C	4.8	- 4.8	- 4.8	-	V		
		25°C	4.3	4.4	4.5	5.1	4.3	5.3	V
		50°C	3.7	- 4.8	- 3.9	-	-	V	
		70°C	- 4.1	- 4.6	- 4.8	-	V		
LCM current consumption (No B/L)	Idd	Vdd=5V	-	1.5	2.5	mA			
Backlight current consumption	LED/edge	VB/L=4.2V	-	40	-	mA			
	LED/array	VB/L=4.2V	-	-	-	mA			

REMARK

LCD option: STN, TN, FSTN  
 Backlight Option: LED, EL Backlight feature, other Specs not available on catalog is under request.

