

AZ921

ULTRA-SENSITIVE SUBMINIATURE RELAY

FEATURES

- 5 Amp switching capability
- Extremely small footprint utilizing only 0.16 square inch of PCB area
- Thin vertical profile only 0.2" wide
- Dielectric strength 3000Vrms contact to coil
- Bifurcated contacts available
- Epoxy sealed
- Class B (130°C) standard
- Class F (155°C) versions available
- UL, CUR file E43203
- TÜV 50243813



CONTACTS

Arrangement	SPST (1 Form A), single button contact or bifurcated
Ratings	Resistive load: Max. switched power: 150W or 1250VA Max. switched current: 5A Max. switched voltage: 150VDC* or 250VAC Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
Rated Load UL, CUR	5A at 250VAC, Resistive, 50k cycles [1][2][3] 3A at 250VAC, Resistive, 100k cycles [1][2][3] 5A at 30VDC, Resistive, 50k cycles [1][2][3] 3A at 30VDC, Resistive, 100k cycles [1][2][3] B300 pilot duty [3] R300 pilot duty [3]
TÜV	5A at 250VAC, Resistive, 50k cycles [3] 5A at 250VAC, Resistive, 100k cycles [1][2] 5A at 30VDC, Resistive, 50k cycles [3] 5A at 30VDC, Resistive, 100k cycles [1][2]
Material	Silver nickel (single button contact) [1] Silver nickel, gold plated (bifurcated contact) [2] Silver tin oxide (single button contact) [3] Gold plating available
Resistance	< 50 milliohms initially (1A, 6VDC method)

COIL

Power	
At Pickup Voltage (typical)	58mW (5 - 18VDC) 88mW (24VDC)
Max. Continuous Dissipation	1.3W at 20°C (68°F) ambient
Temperature Rise	12°C (22°F) at nominal coil voltage (5-18 V coils) 17°C (31°F) at nominal coil voltage (24 V coil)
Temperature	Max. 130°C (266°F) Class B Max. 155°C (311°F) Class F

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 20 million operations 1 X 10 ⁵ at 5A, 30VDC or 250VAC
Operate Time (typical)	10ms at nominal coil voltage
Release Time (typical)	5ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	1000Vrms between open contacts 3000Vrms contact to coil
Insulation Resistance	1000 megohms min. at 20°C, 500VDC, 50% RH
Dropout	Greater than 10% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -40°C (-40°F) to 85°C (185°F) -40°C (-40°F) to 130°C (266°F)
Vibration	0.062" (1.5mm) DA at 10–55Hz
Shock	10g
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	3 grams


NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

AMERICAN ZETTLER, INC.

AZ921

RELAY ORDERING DATA

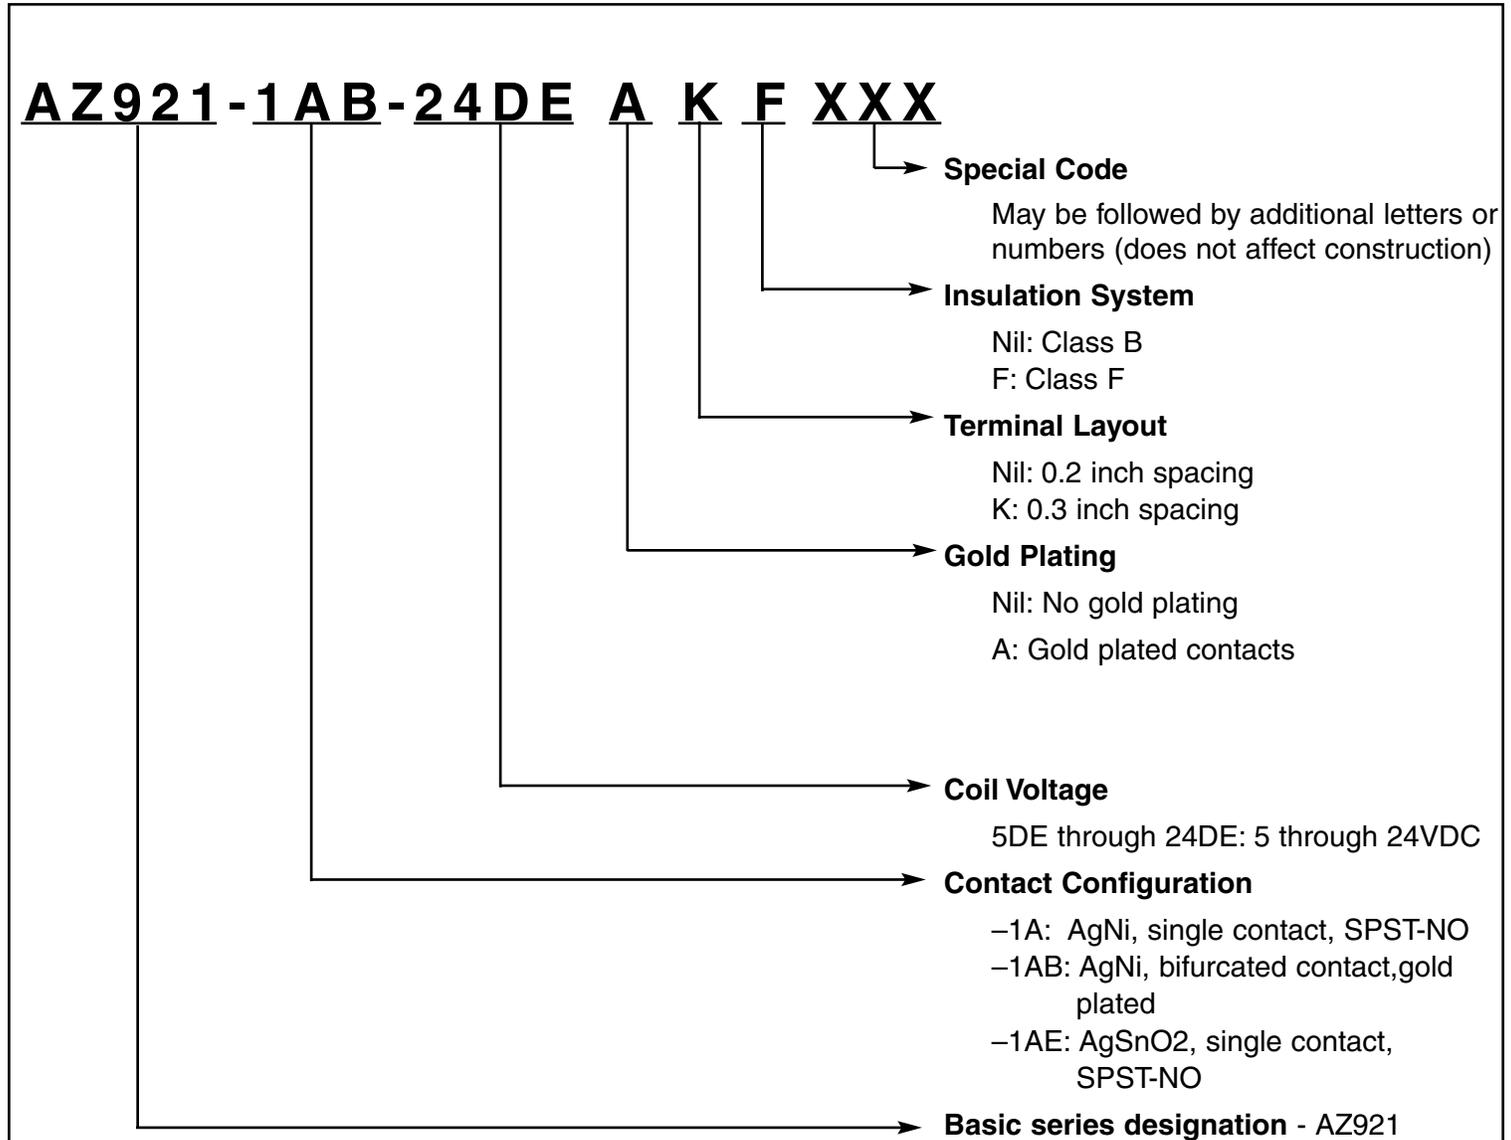


Coil Specifications

Nominal Coil VDC	Max. Continuous VDC	Coil Resistance Ohms $\pm 10\%$	Must Operate VDC
5	16.5	208	3.5
6	19.9	300	4.2
9	29.8	675	6.3
12	39.8	1200	8.4
18	59.6	2700	12.6
24	65.0	3200	16.8

AMERICAN ZETTLER, INC.

4/14/2023

MECHANICAL DATA

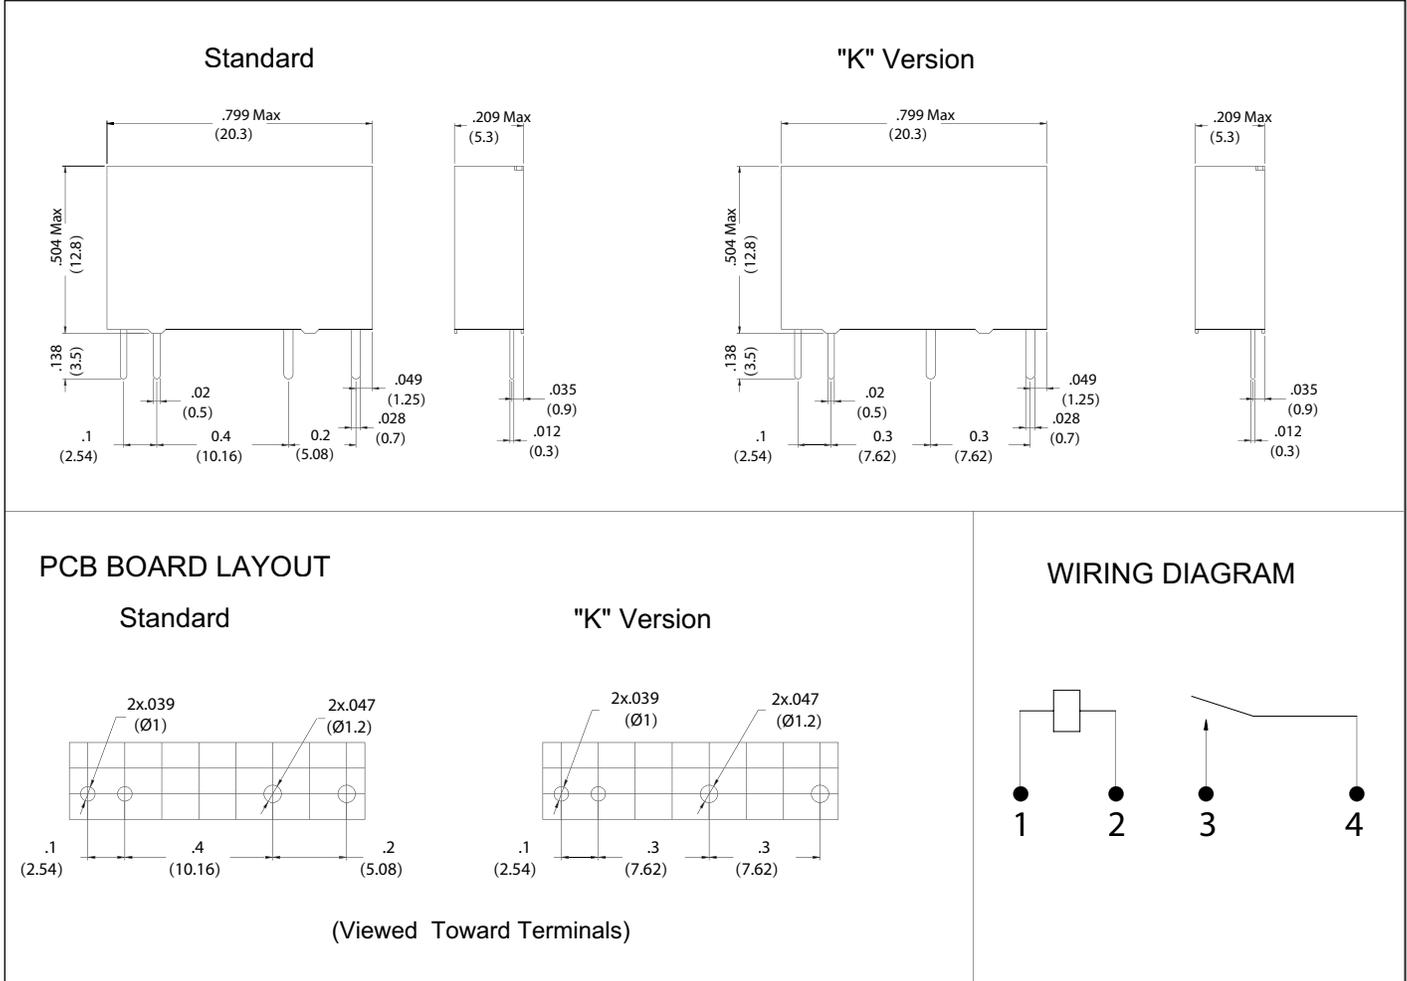

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "