


Features

- Epitaxial planar die construction
- Built-in biasing resistors (R_1 : 10k Ω)
- Also available in lead free version
- RoHS compliant with Halogen-free

HF

Mechanical Data

- Case: SOT-23, SOT-323, SOT-523, SOT-723, DFN1006-3
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

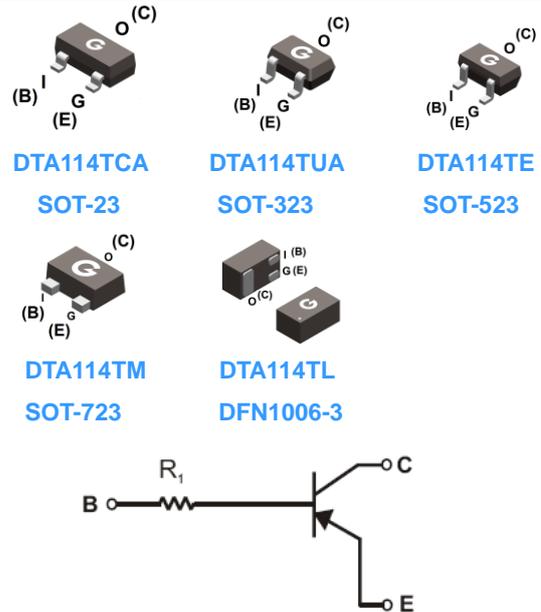

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
DTA114TCA	SOT-23	3000 pcs / Tape & Reel	94
DTA114TUA	SOT-323	3000 pcs / Tape & Reel	94
DTA114TE	SOT-523	3000 pcs / Tape & Reel	94
DTA114TM	SOT-723	10000 pcs / Tape & Reel	94
DTA114TL	DFN1006-3	10000 pcs / Tape & Reel	94

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value					Unit
		SOT-23	SOT-323	SOT-523	SOT-723	DFN1006-3	
Collector-Base Voltage	V_{CBO}	-50					V
Collector-Emitter Breakdown Voltage	V_{CEO}	-50					V
Emitter-Base Breakdown Voltage	V_{EBO}	-5					V
Collector Current (Continuous)	I_C	-100					mA
Collector Current	$I_{C(Max)}$	-100					mA
Power Dissipation	P_D	200	200	150	100	100	mW
Junction Temperature Range	T_J	-55 ~ +150					$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150					$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = -50\mu\text{A}, I_E = 0$	-50	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -1\text{mA}, I_B = 0$	-50	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -50\mu\text{A}, I_C = 0$	-5	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB} = -50\text{V}, I_E = 0$	-	-	-0.5	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = -4\text{V}, I_C = 0$	-	-	-0.5	μA
Input Voltage	$V_{I(OFF)}$	$V_{CC} = -5\text{V}, I_O = -100\mu\text{A}$	-0.5	-	-	V
Input Voltage	$V_{I(ON)}$	$V_O = -0.3\text{V}, I_O = -10\text{mA}$	-	-	-3	V
Collector-emitter Saturation Voltage	$V_{CE(sat)}$	$I_O = -10\text{mA}, I_I = -1\text{mA}$	-	-	-0.3	V
DC Current Gain	h_{FE}	$V_O = -5\text{V}, I_O = -1\text{mA}$	100	-	600	-
Input Resistor	R_1		7	10	13	$\text{k}\Omega$
Gain-Bandwidth Product	f_T	$V_{CE} = -10\text{V}, I_E = -5\text{mA}$ $f = 100\text{MHz}$	-	250	-	MHz

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

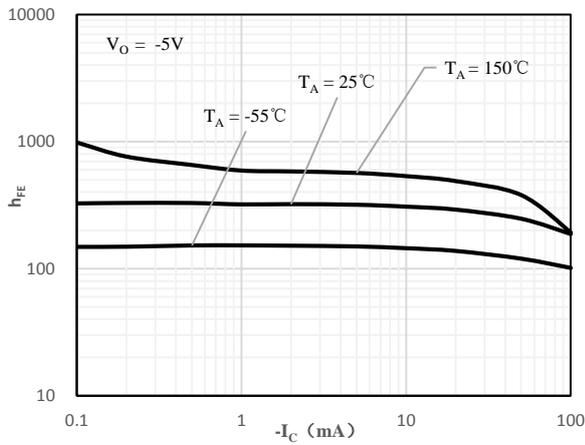


Fig 1 h_{FE} vs. I_c

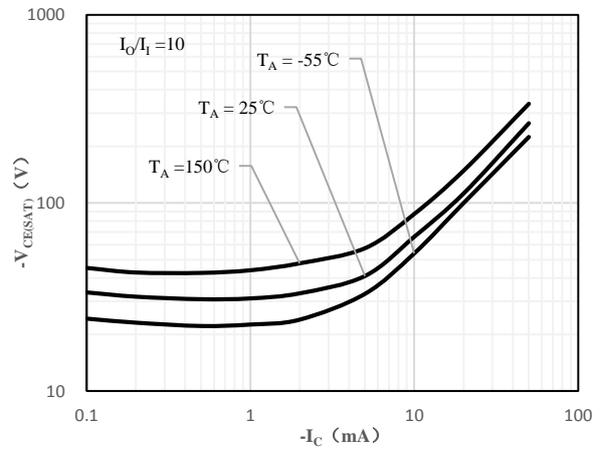


Fig 2 $V_{CE(sat)}$ vs. I_c

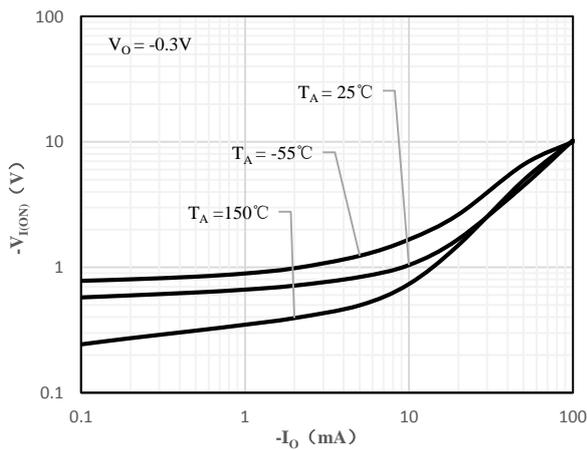


Fig 3 Input Voltage vs Output Current




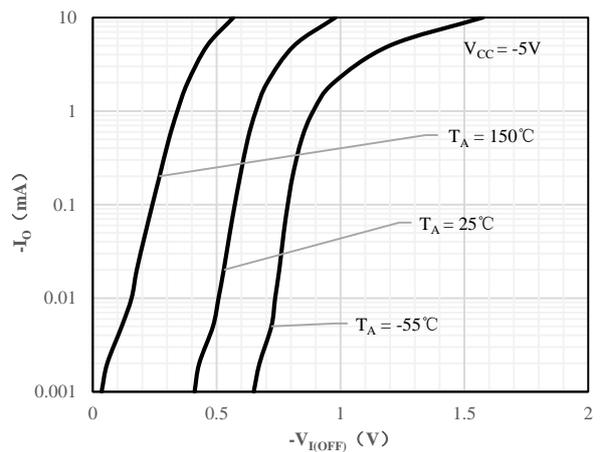


Fig 4 Output Current vs Input Voltage


Package Outline Dimensions (Unit: mm)

SOT-23			
Dimension	Min.	Max.	
A	2.70	3.10	
B	1.10	1.50	
C	0.90	1.10	
D	0.30	0.50	
E	0.35	0.48	
G	1.80	2.00	
H	0.02	0.10	
J	0.05	0.15	
K	2.20	2.60	


SOT-323			
Dimension	Min.	Max.	
A	2.00	2.20	
B	1.15	1.35	
C	0.90	1.10	
D	0.15	0.35	
E	0.25	0.40	
G	1.20	1.40	
H	0.02	0.10	
J	0.05	0.15	
K	2.20	2.40	

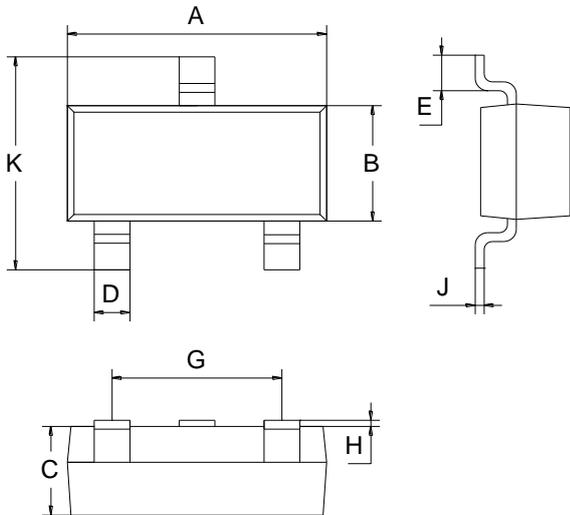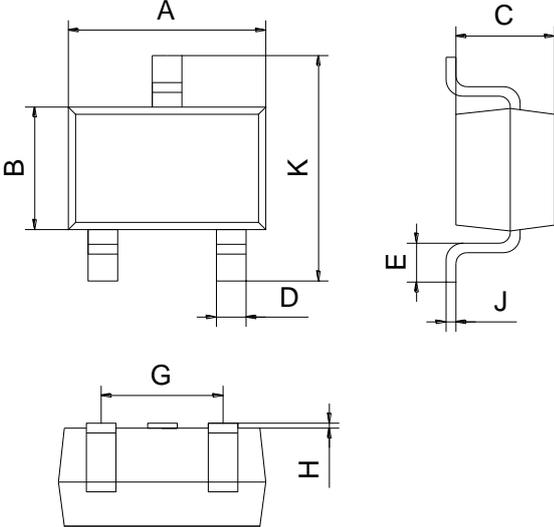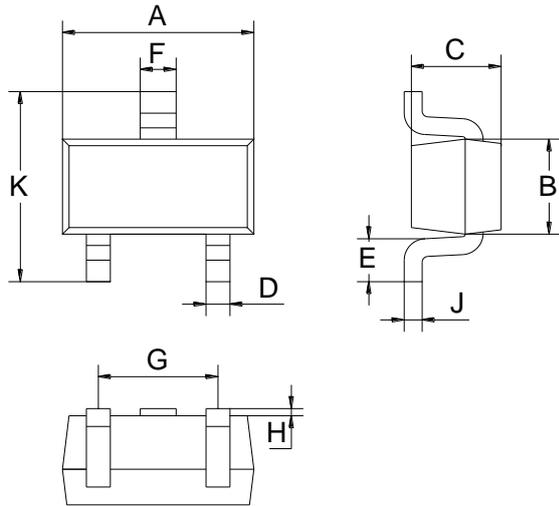

SOT-523		
Dimension	Min.	Max.
A	1.50	1.70
B	0.75	0.85
C	0.60	0.80
D	0.15	0.30
E	0.30	0.40
F	0.25	0.40
G	0.90	1.10
H	0.02	0.10
J	0.08	0.18
K	1.45	1.75

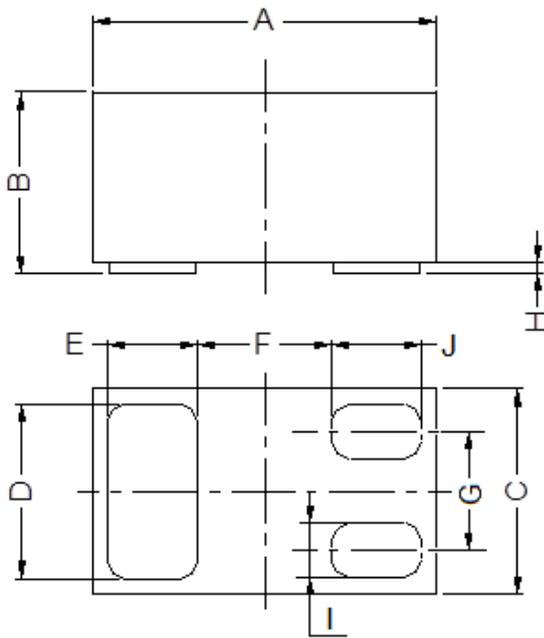


DFN1006-3			
Dimension	Min.	Typ.	Max.
A	0.95	1.00	1.075
B	0.47	0.50	0.53
C	0.55	0.60	0.675
D	0.45	0.50	0.55
E/J	0.20	0.25	0.30
F	-	0.40	-
G	-	0.35	-
H	0	0.03	0.05
I	0.10	0.15	0.20

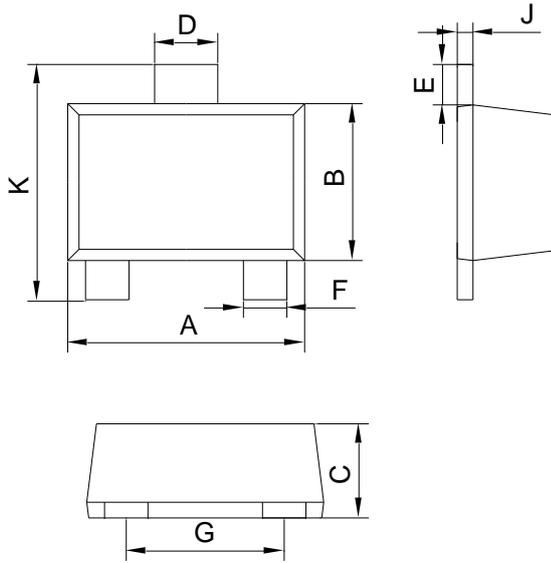


SOT-723		
Dimension	Min.	Max.
A	1.10	1.30
B	0.70	0.90
C	0.40	0.54
D	0.22	0.42
E	0.10	0.30
F	0.12	0.32
G	0.70	0.90
J	0.08	0.15
K	1.10	1.30

Mounting Pad Layout (Unit: mm)


SOT-23

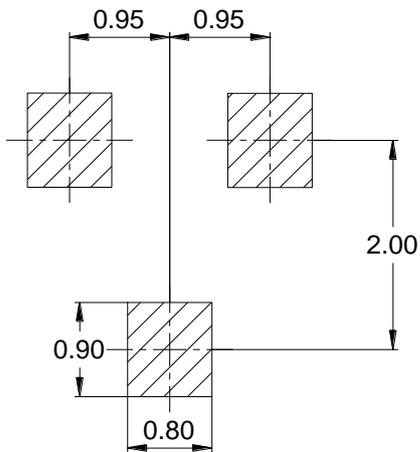


SOT-323

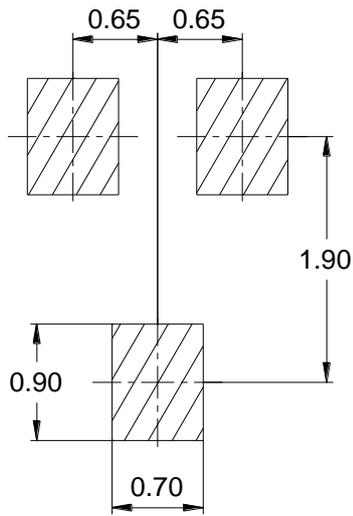

SOT-523

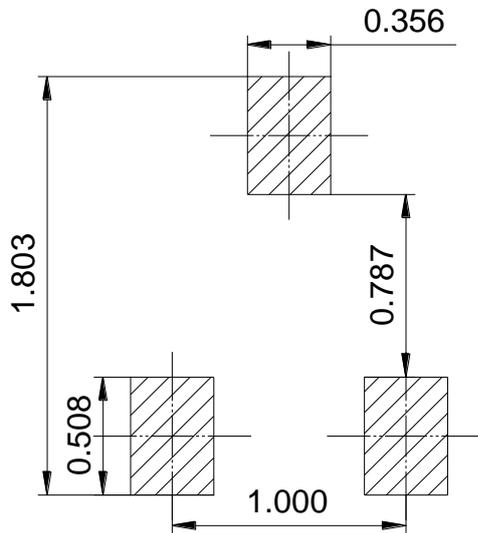

DFN1006-3

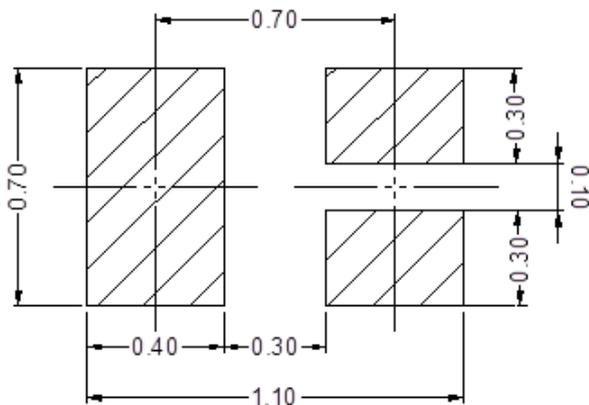

SOT-723

