




1F1G thru 1F7G



Fast Recovery Rectifiers Glass Passivation Junction

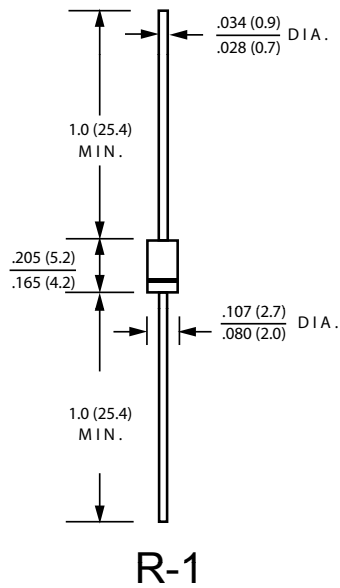

Dimensions in inches and (millimeters)

Features

- Ideal for surface mount applications
- Easy pick and place
- Built-in strain relief
- Fast switching speed
- AEC-Q101 qualified

Mechanical Data

- Cases: R-1
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead free Plating (Tin Finish)
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.201 grams (approximate)

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	1F1G	1F2G	1F3G	1F4G	1F5G	1F6G	1F7G	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current	I _F	1.0							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	25.0							A
Maximum Instantaneous Forward Voltage IF=1A @ 25°C	V _F	1.3							V
Maximum DC Reverse Current @ Tc=25°C at Rated DC Blocking Voltage @ Tc=100°C	I _R	5 100							uA
Maximum Reverse Recovery Time(NOTE2)	trr	150				250	500		ns
Typical Junction Capacitance(NOTE1)	C _j	20							pF
Typical Thermal Resistance	R _{θJA}	80							°C/W
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

NOTES:1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC

2.Measured with IF=0.5A,IR=1A,IRR=0.25A



Fast Recovery Rectifiers Glass Passivation Junction

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

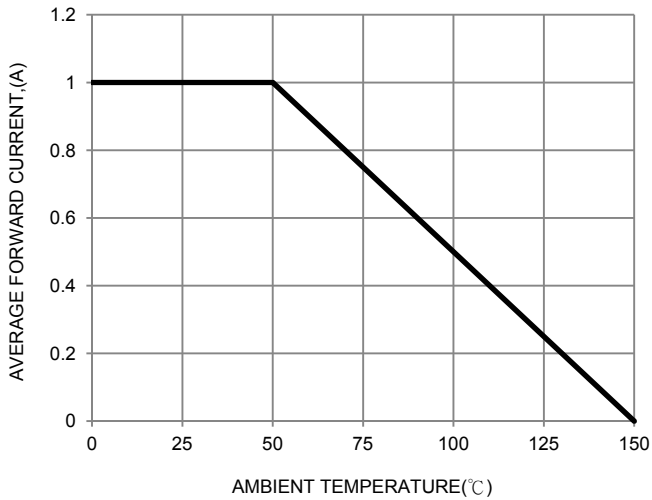


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

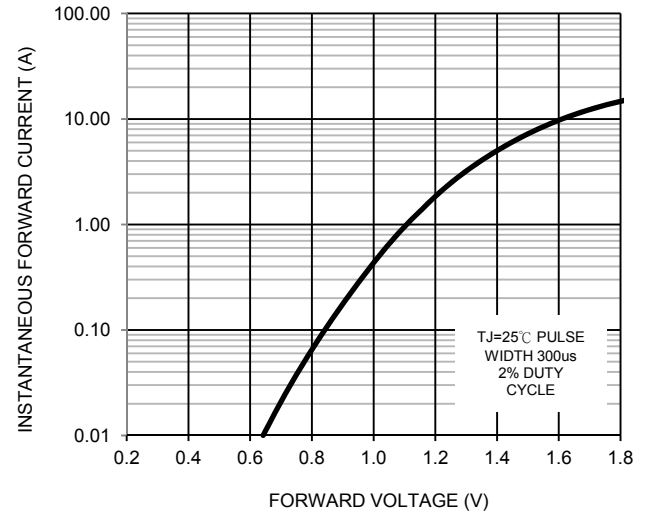


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

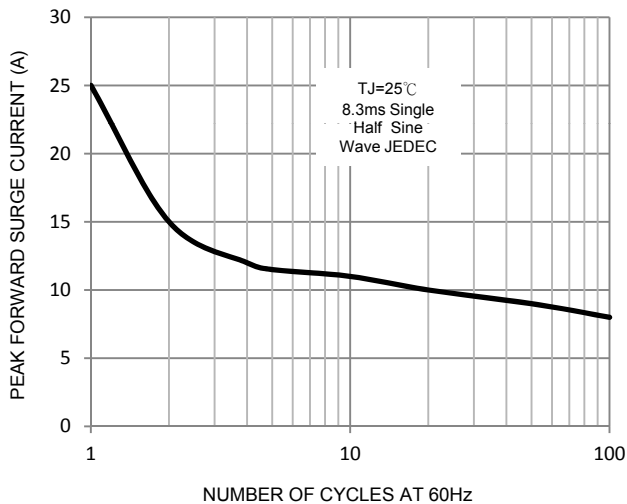


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

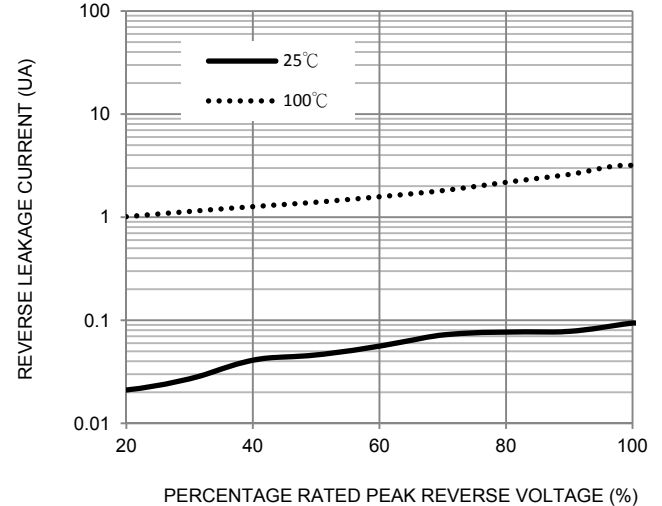


FIG. 5-TYPICAL JUNCTION CAPACITANCE

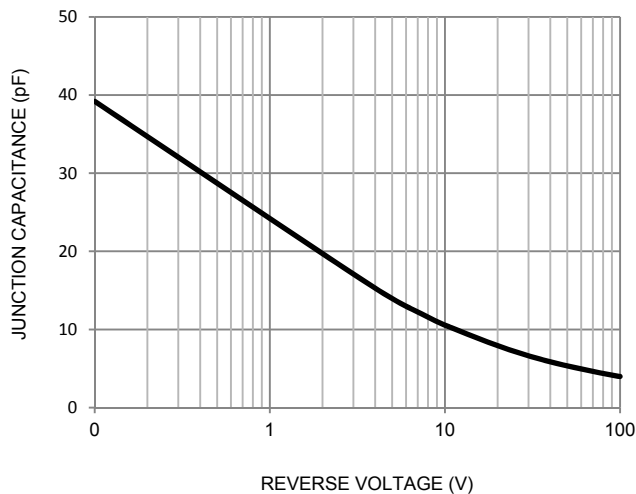


FIG. 6-Reverse Recovery Time Characteristic and Test Circuit

