


### Features

- Fast switching speed
- High conductance
- RoHS compliant with Halogen-free

HF

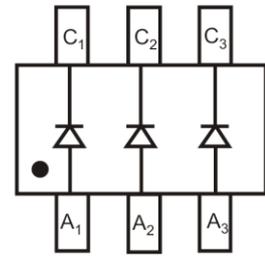

SOT-363

### Mechanical Data

- Case: SOT-363
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

### Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BAS16TW	SOT-363	3000 pcs / Tape & Reel	KA2

### Maximum Ratings (@ T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V <sub>RM</sub>	100	V
Peak Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	100	V
Working Peak Reverse Voltage	V <sub>RWM</sub>	100	V
DC Blocking Voltage	V <sub>R</sub>	100	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	70	V
Average Rectified Output Current	I <sub>o</sub>	200	mA
Peak Forward Surge Current, 1μs Single Half-sine-wave	I <sub>FSM</sub>	2	A
Peak Forward Surge Current, 1s Single Half-sine-wave	I <sub>FSM</sub>	1	A

### Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation (T <sub>sp</sub> ≤ 85°C)	P <sub>D</sub>	250	mW
Thermal Resistance Junction-to-Air	R <sub>θJA</sub>	625	°C/W
Thermal Resistance Junction to solder point <sup>1, 2</sup>	R <sub>θJsp</sub>	260	°C/W
Operating Junction Temperature Range	T <sub>J</sub>	-65 ~ +150	°C
Storage Temperature Range	T <sub>STG</sub>	-65 ~ +150	°C


Notes:

1. Single diode loaded
2. Soldering points at pins C<sub>1</sub>, C<sub>2</sub> and C<sub>3</sub>


**Electrical Characteristics** (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 1\mu\text{A}$	100	-	-	V
Forward Voltage	$V_F$	$I_F = 1\text{mA}$	-	-	0.715	V
		$I_F = 10\text{mA}$	-	-	0.855	V
		$I_F = 50\text{mA}$	-	-	1.000	V
		$I_F = 150\text{mA}$	-	-	1.250	V
Maximum Peak Reverse Current	$I_R$	$V_R = 20\text{V}$	-	-	25	nA
		$V_R = 75\text{V}$	-	-	1	$\mu\text{A}$
		$V_R = 25\text{V}, T_J = 150^\circ\text{C}$	-	-	30	$\mu\text{A}$
		$V_R = 75\text{V}, T_J = 150^\circ\text{C}$	-	-	50	$\mu\text{A}$
Total Capacitance	$C_J$	$V_R = 0\text{V}, f = 1.0\text{MHz}$	-	-	2	pF
Reverse Recovery Time	$t_{rr}$	$I_F = I_R = 10\text{mA}$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$	-	-	4	ns


**Ratings and Characteristics Curves** (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

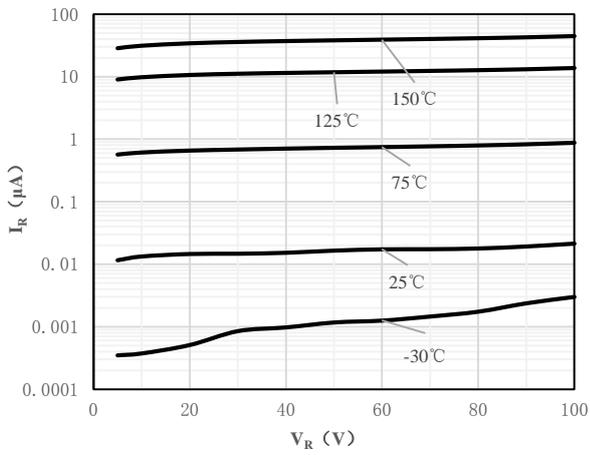


**Fig 1 Typical Reverse Characteristic**

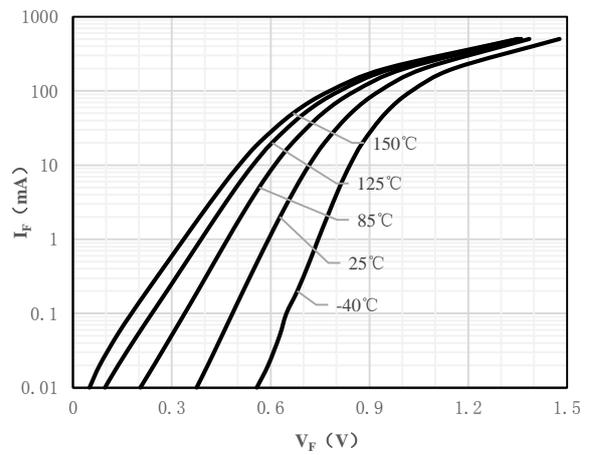

**Fig 2 Typical Forward Characteristics**

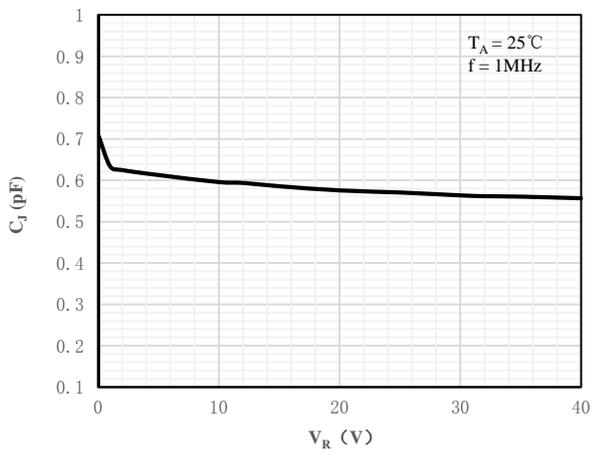


**Fig 3 Capacitance vs. Reverse Voltage**

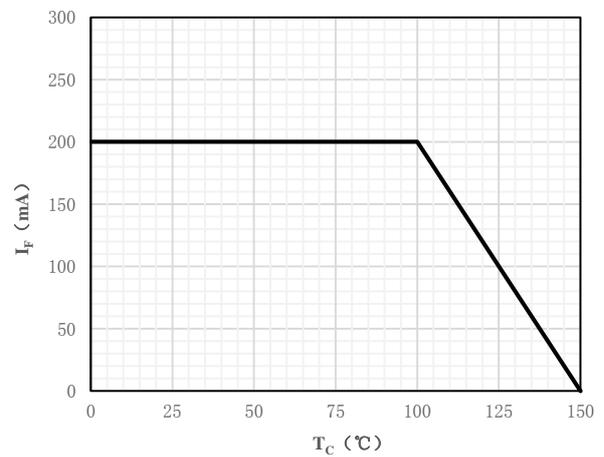

**Fig 4 Forward Current Derating Curve**

**Package Outline Dimensions** (Unit: mm)

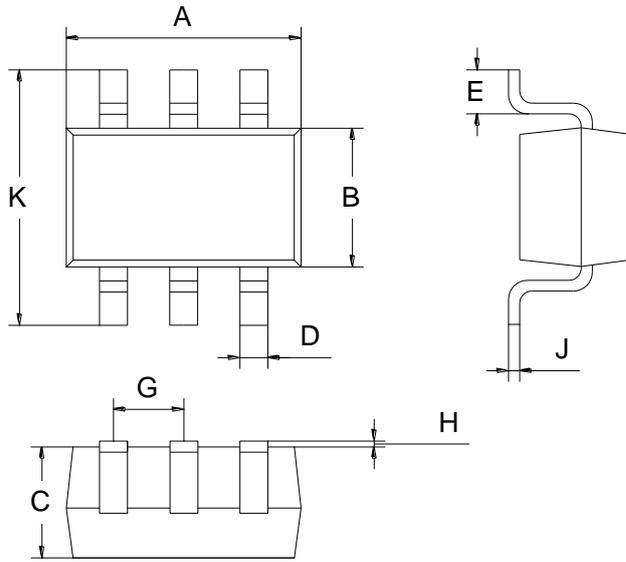

SOT-363		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

**Mounting Pad Layout** (Unit: mm)

**SOT-363**

