


Type No. 1N198B

T-03-07

GOLD BONDED GERMANIUM DIODE

6 Lake Street
PO Box 1436
Lawrence, MA 01841

Telephone (617) 681-0392
TeleFax (617) 681-9135
Telex 928377

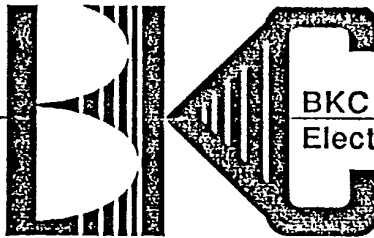

BKC International
Electronics Inc.

FEATURES

Low forward voltage drop—low power consumption
Thirty years of proven reliability—one million hours mean time between failures (MTBF)
Very low noise level
Metallurgically bonded


ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	100 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	100		V	25 °C
Reverse Current	I _r	50 V		50	μA	25 °C
Reverse Current	I _r	50 V		250	μA	75 °C
Forward Voltage	V _f	4 mA		1	V	25 °C
Reverse Recovery	T _{rr}	See Note		300	n Sec	

Note: I_f = 2, V_r = -6, Recover to 50 k.

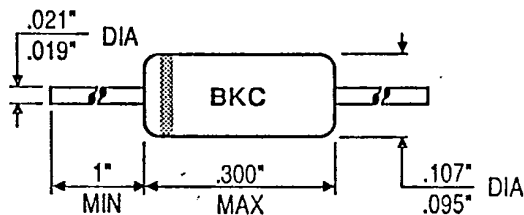MECHANICAL

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.