


Features

- Epitaxial planar die construction
- Built-in biasing resistors (R_1 : 10k Ω , R_2 : 10k Ω)
- Also available in lead free version
- RoHS compliant with Halogen-free

HF

Mechanical Data

- Case: SOT-23, SOT-323, SOT-523, SOT-723, DFN1006-3
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

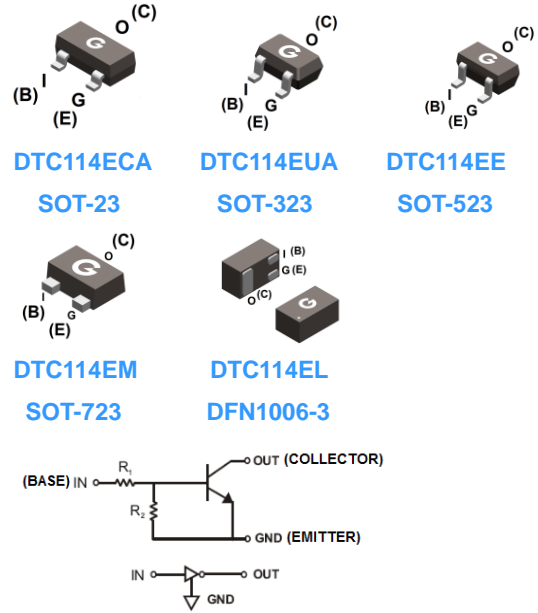

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
DTC114ECA	SOT-23	3000 pcs / Tape & Reel	24
DTC114EUA	SOT-323	3000 pcs / Tape & Reel	24
DTC114EE	SOT-523	3000 pcs / Tape & Reel	24
DTC114EM	SOT-723	10000 pcs / Tape & Reel	24
DTC114EL	DFN1006-3	10000 pcs / Tape & Reel	24

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value					Unit
		SOT-23	SOT-323	SOT-523	SOT-723	DFN1006-3	
Supply Voltage	V_{CC}	50					V
Input Voltage	V_I	-10 to +40					V
Output Current	I_O	50					mA
Collector Current	$I_{C(\text{Max})}$	100					mA
Power Dissipation	P_D	200	200	150	100	100	mW
Junction Temperature Range	T_J	-55 ~ +150					$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150					$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(OFF)}$	$V_{CC} = 5V, I_o = 100\mu A$	0.5	-	-	V
Input Voltage	$V_{I(ON)}$	$V_o = 0.3V, I_o = 10mA$	-	-	3	V
Output Voltage	$V_{O(on)}$	$I_o = 10mA, I_i = 0.5mA$	-	-	0.3	V
Input Current	I_i	$V_i = 5V$	-	-	0.88	mA
Output Current	$I_{O(off)}$	$V_{CC} = 50V, V_i = 0V$	-	-	0.5	μA
DC Current Gain	G_I	$V_o = 5V, I_o = 5mA$	30	-	-	-
Input Resistor	R_1		7	10	13	k Ω
Resistance ratio	R_2/R_1		0.8	1.0	1.2	-
Gain-Bandwidth Product	f_T	$V_{CE} = 10V, I_E = 5mA$ $f = 100MHz$	-	250	-	MHz

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

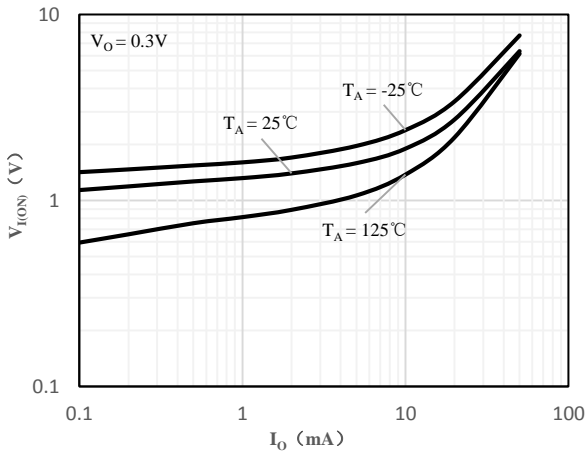


Fig 1 Input Voltage vs Output Current

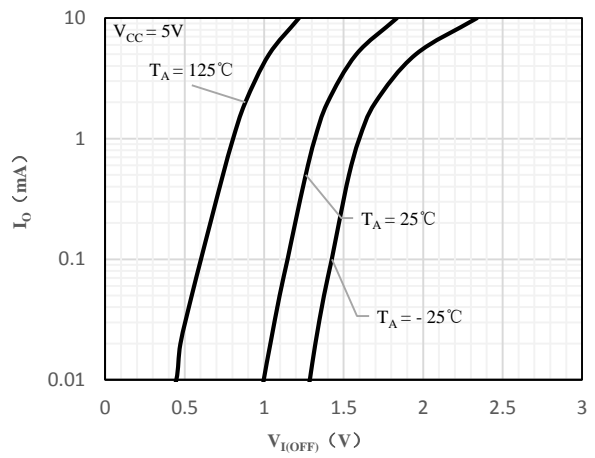


Fig 2 Output Current vs Input Voltage

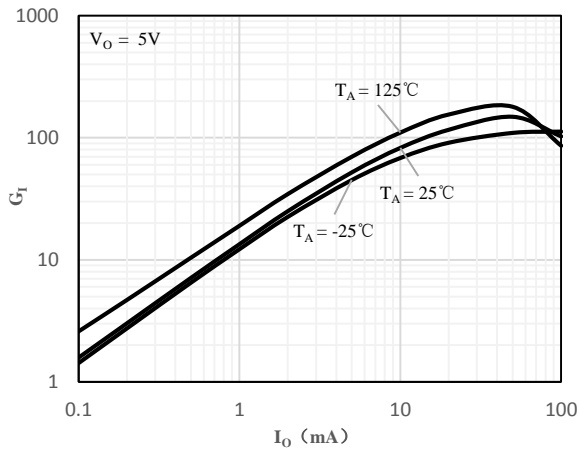


Fig 3 DC Current Gain vs Output Current





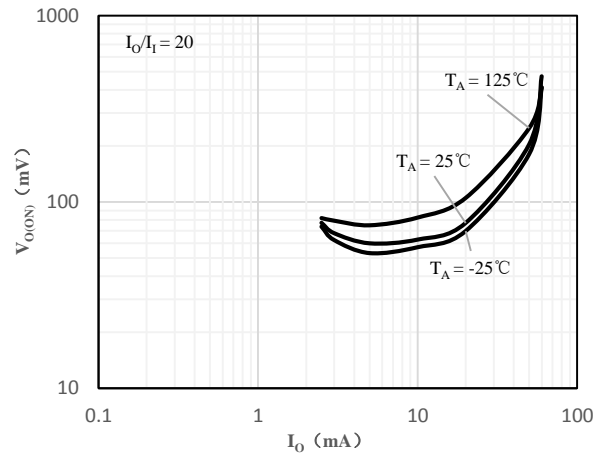



Fig 4 Output Voltage vs Output Current

Package Outline Dimensions (Unit: mm)

SOT-23			
Dimension	Min.	Max.	
A	2.70	3.10	 <p> The diagram shows three views of the SOT-23 package: a top view with dimensions A (width), B (height), and K (total height); a side view with dimensions C (width), D (lead width), E (lead height), G (lead spacing), and H (lead thickness); and a perspective view with dimensions J (lead length) and H (lead thickness). </p>
B	1.10	1.50	
C	0.90	1.10	
D	0.30	0.50	
E	0.35	0.48	
G	1.80	2.00	
H	0.02	0.10	
J	0.05	0.15	
K	2.20	2.60	

SOT-323			
Dimension	Min.	Max.	
A	2.00	2.20	 <p> The diagram shows three views of the SOT-323 package: a top view with dimensions A (width), B (height), and K (total height); a side view with dimensions C (width), D (lead width), E (lead height), G (lead spacing), and H (lead thickness); and a perspective view with dimensions J (lead length) and H (lead thickness). </p>
B	1.15	1.35	
C	0.90	1.10	
D	0.15	0.35	
E	0.25	0.40	
G	1.20	1.40	
H	0.02	0.10	
J	0.05	0.15	
K	2.20	2.40	

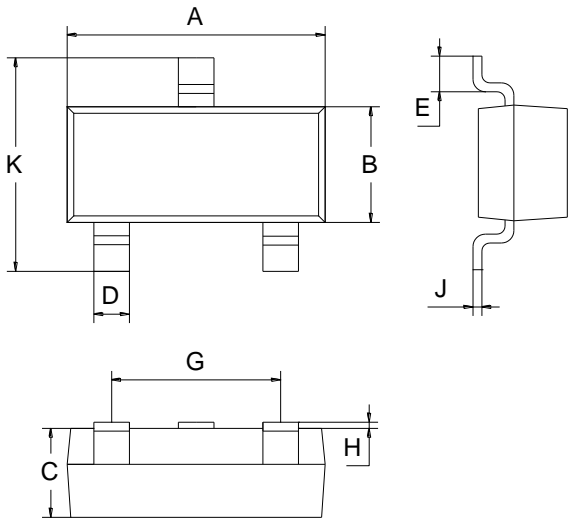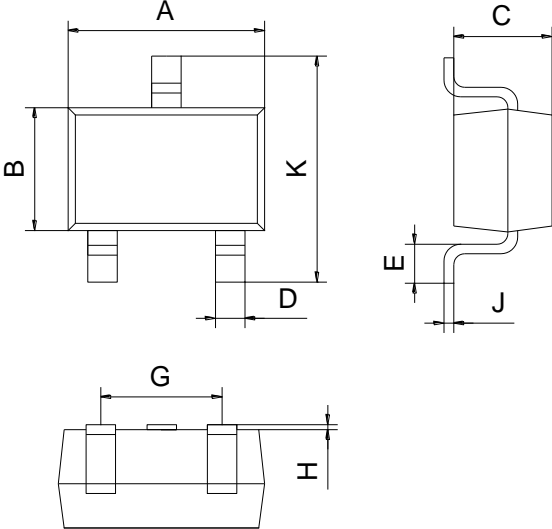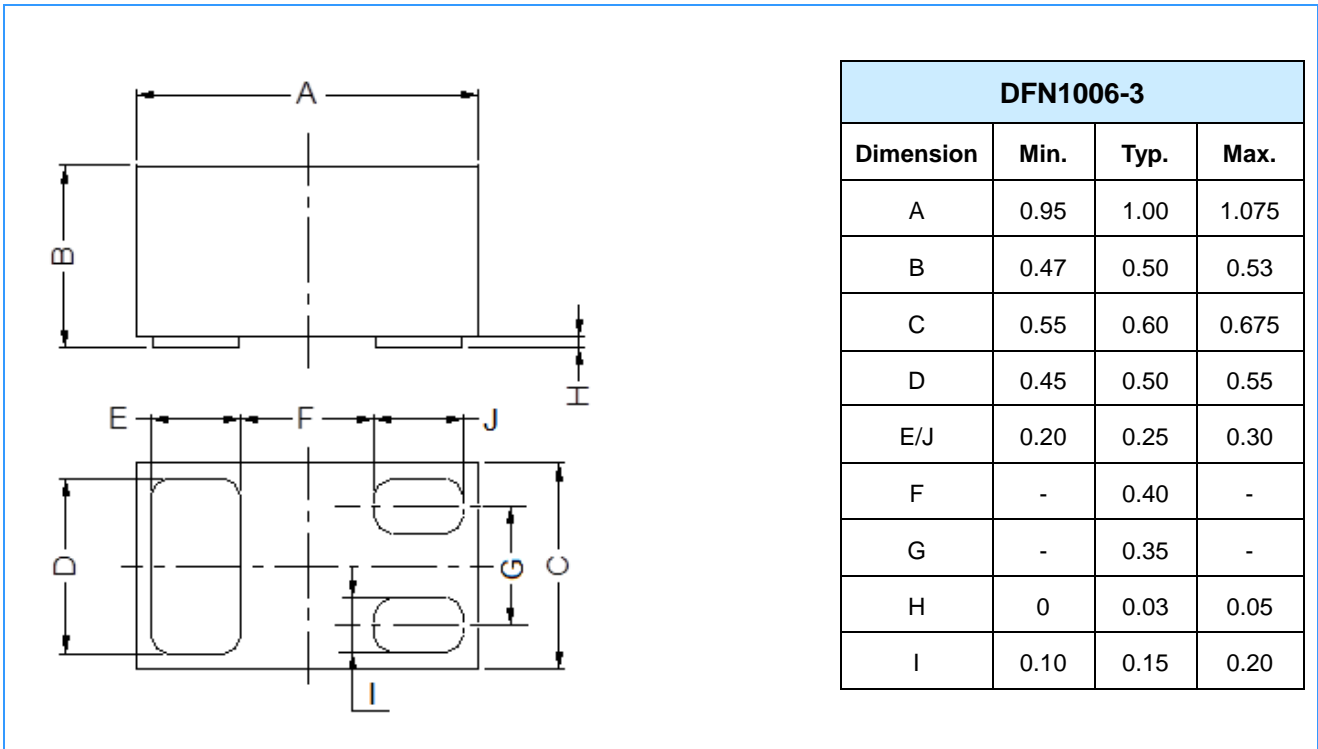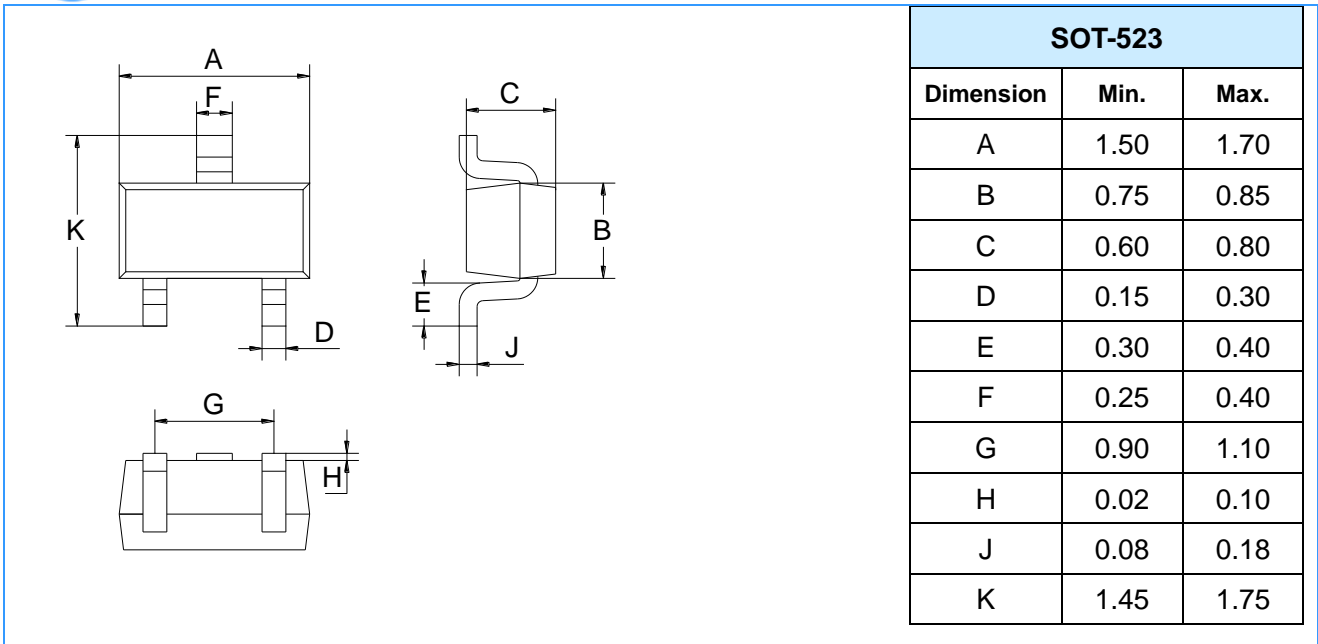


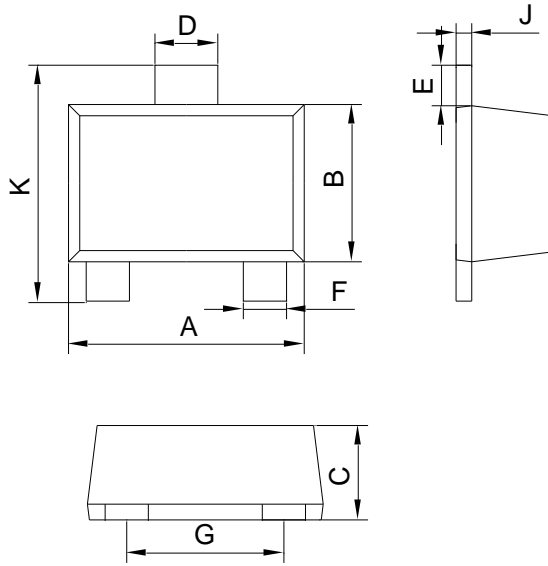


SOT-723		
Dimension	Min.	Max.
A	1.10	1.30
B	0.70	0.90
C	0.40	0.54
D	0.22	0.42
E	0.10	0.30
F	0.12	0.32
G	0.70	0.90
J	0.08	0.15
K	1.10	1.30

Mounting Pad Layout (Unit: mm)


SOT-23

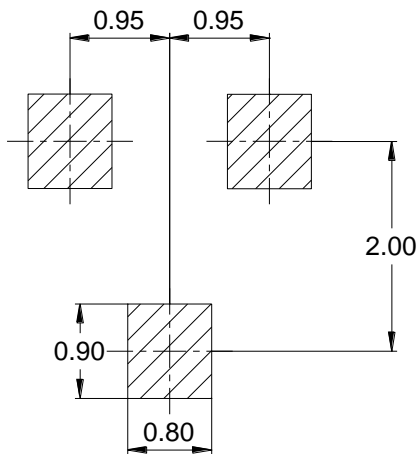


SOT-323

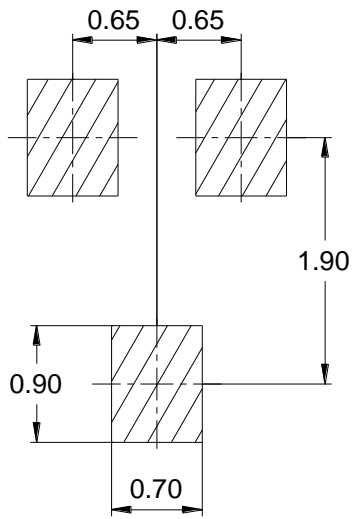

SOT-523

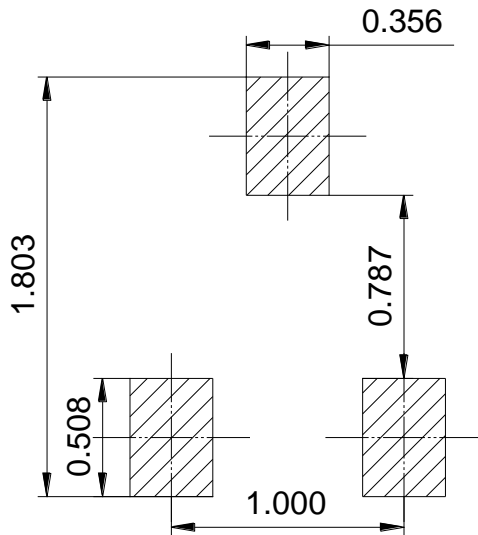

DFN1006-3

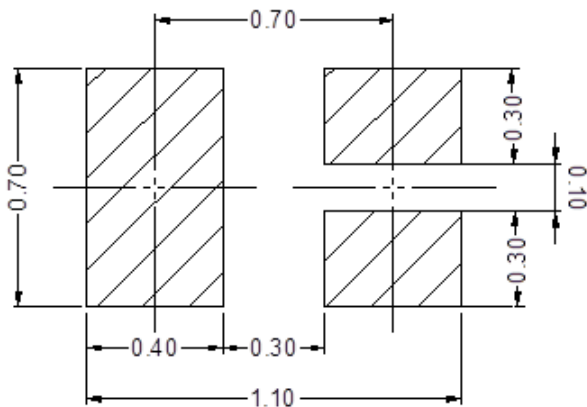

SOT-723

