

Kingtronics® Kt®**BAT54S**
SCHOTTKY
BARRIER DIODE**FEATURES**

Low Forward Voltage
Fast Switching
Surface Mount device
For General Purpose Switching Applications

MECHANICAL DATA


Case: SOT-23
Case Material: Molded Plastic. UL flammability
Classification Rating: 94V-0
Moisture Sensitivity: Level 1 per J-STD-020
Weight: 0.013 grams (approximate)

MAXIMUM RATINGS (T_A = 25° C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V _R		
Peak Repetitive Peak Reverse Voltage	V _{RRM}	30	V
Working Peak Reverse Voltage	V _{RWM}		
Forward Continuous Current	I _F	200	mA
Non-repetitive Peak Forward Surge Current @ t=8.3ms	I _{FSM}	600	mA
Repetitive Peak Forward Current @ t≤1s,δ≤0.5	I _{FRM}	300	mA
Power Dissipation	P _D	200	mW
Thermal Resistance From Junction To Ambient	R _{θJA}	500	°C/W
Junction Temperature	T _J	125	°C
Storage Temperature	T _{stg}	-55~+150	°C





ELECTRICAL CHARACTERISTICS (T_A = 25° C unless otherwise specified)

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITION
Reverse breakdown voltage	V _(BR)	30		V	I _R =100uA
Reverse voltage leakage current	I _R		2	uA	V _R =25V
Forward voltage	V _{F1}		0.24	V	I _{F1} =0.1 mA
Forward voltage	V _{F2}		0.32	V	I _{F2} =1 mA
Forward voltage	V _{F3}		0.40	V	I _{F3} =10 mA
Forward voltage	V _{F4}		0.50	V	I _{F4} =30 mA
Forward voltage	V _{F5}		1	V	I _{F5} =100 mA
Diode capacitance	C _D		10	pF	V _R =1V,f=1MHz
Reverse recovery time	T _{rr}		5	nS	I _F =I _R =10mA I _{rr} =0.1×I _R R _L =100Ω

SOT-23

BAT54S:KL4


Typical Characteristics

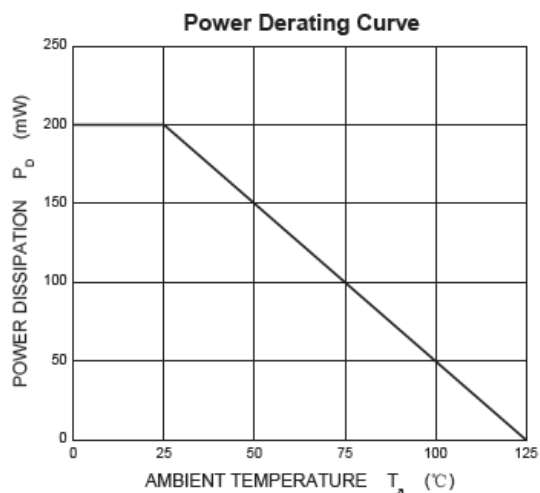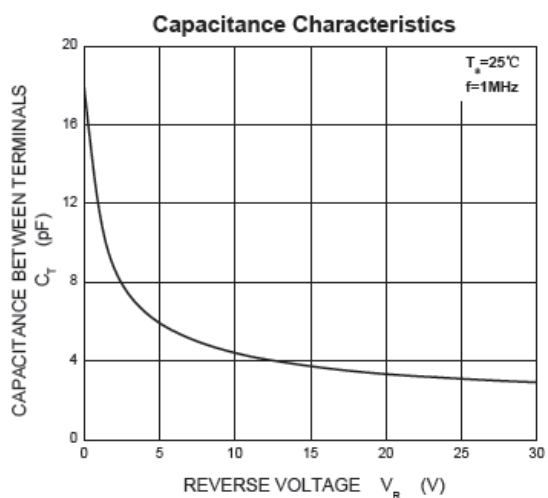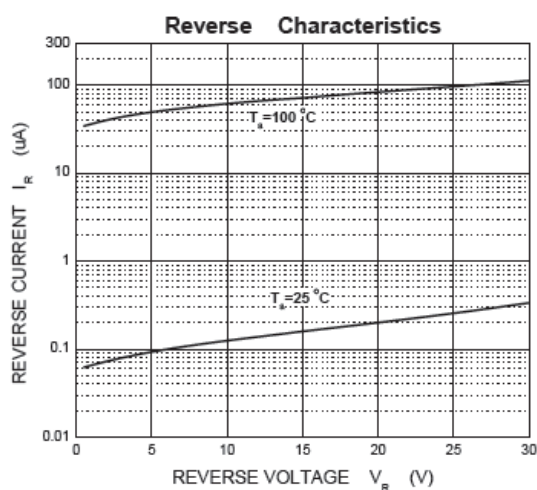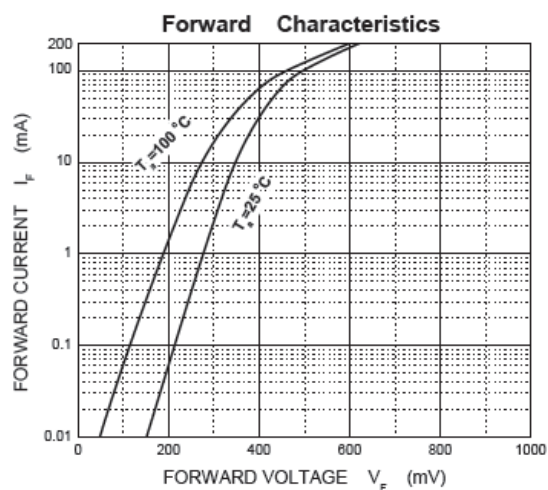

Kingtronics® Kt®


BAT54S SCHOTTKY BARRIER DIODE

SOT-23 Package Outline Dimensions

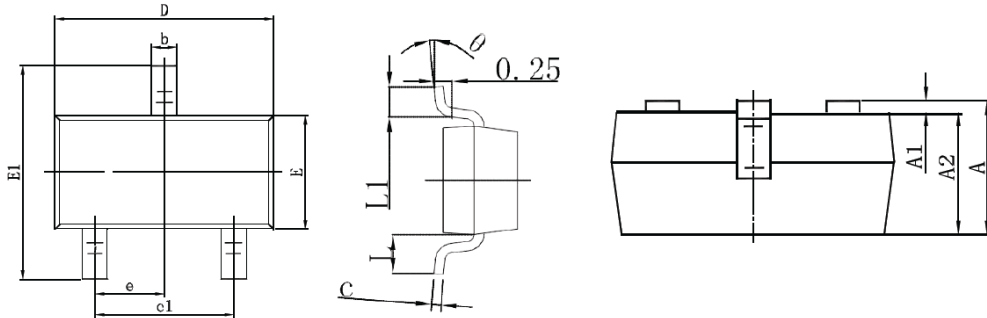

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout

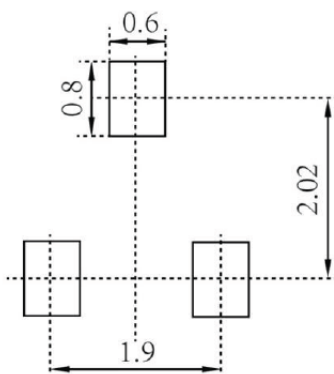

Note:

1. Controlling dimension: in millimeters
2. General tolerance: $\pm 0.05\text{mm}$
3. The pad layout is for reference purposes only

Note: Specifications are subject to change without notice.