



Trench Power MOSFET IXUC100N055 ISOPLUS220™

Electrically Isolated Back Surface

$$\begin{aligned} V_{DSS} &= 55 \text{ V} \\ I_{D25} &= 100 \text{ A} \\ R_{DS(on)} &= 7.7 \text{ m}\Omega \end{aligned}$$



ISOPLUS 220™



Isolated back surface*

G = Gate,
S = Source
D = Drain,

* Patent pending

Features

- Silicon chip on Direct-Copper-Bond substrate
 - High power dissipation
 - Isolated mounting surface
 - 2500V electrical isolation
- Trench MOSFET
 - very low $R_{DS(on)}$
 - fast switching
 - usable intrinsic reverse diode
- Low drain to tab capacitance (<30pF)
- Unclamped Inductive Switching (UIS) rated

Applications

- Automotive 42V and 12V systems
 - electronic switches to replace relays & fuses
 - choppers to replace series dropping resistors used for motors, heaters, etc.
 - inverters for AC drives, e.g. starter generator
 - DC-DC converters, e.g. 12V to 42V, etc.
- Power supplies
 - DC - DC converters
 - Solar inverters
- Battery powered systems
 - choppers or inverters for motor control in hand tools
 - battery chargers

Advantages

- Easy assembly: no screws or isolation foils required
- Space savings
- High power density


Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	$T_J = 25^\circ\text{C to } 150^\circ\text{C}$	55	V
V_{GS}	Continuous	± 20	V
I_{D25}	$T_C = 25^\circ\text{C}$; Note 1	100	A
I_{D90}	$T_C = 90^\circ\text{C}$; Note 1	80	A
I_{S25}	$T_C = 25^\circ\text{C}$; Note 1, 2	100	A
I_{S90}	$T_C = 90^\circ\text{C}$; Note 1, 2	70	A
$I_{D(RMS)}$	Package lead current limit	45	A
E_{AS}	$T_C = 25^\circ\text{C}$	500	mJ
P_D	$T_C = 25^\circ\text{C}$	150	W
T_J		-55 ... +175	$^\circ\text{C}$
T_{JM}		175	$^\circ\text{C}$
T_{stg}		-55 ... +150	$^\circ\text{C}$
T_L	1.6 mm (0.062 in.) from case for 10 s	300	$^\circ\text{C}$
V_{ISOL}	RMS leads-to-tab, 50/60 Hz, $t = 1$ minute	2500	V~
F_c	Mounting force with clips	11 ... 65 / 2.4 ... 15	N/lb
Weight		3	g

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
$R_{DS(on)}$	$V_{GS} = 10 \text{ V}$, $I_D = I_{D90}$, Note 3		6.1	7.7 m Ω
$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 1 \text{ mA}$	2		4 V
I_{DSS}	$V_{DS} = V_{DSS}$ $V_{GS} = 0 \text{ V}$ $T_J = 125^\circ\text{C}$		0.1	10 μA
I_{GSS}	$V_{GS} = \pm 20 \text{ V}_{DC}$, $V_{DS} = 0$			$\pm 200 \text{ nA}$

Symbol	Test Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
$Q_{g(\text{on})}$	$V_{GS} = 10\text{ V}, V_{DS} = 14\text{ V}, I_D = 50\text{ A}$		100	nC
Q_{gs}			22	nC
Q_{gd}			36	nC
$t_{d(\text{on})}$	$V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS},$ $I_D = 25\text{ A}, R_G = 10\ \Omega$		35	ns
t_r			115	ns
$t_{d(\text{off})}$			230	ns
t_f			155	ns
R_{thJC}				1 K/W
R_{thCH}		0.30		K/W

Source-Drain Diode		Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
Symbol	Test Conditions	min.	typ.	max.
V_{SD}	$I_F = 50\text{ A}, V_{GS} = 0\text{ V}$ Note 3		0.9	1.5 V
t_{rr}	$I_F = 75\text{ A}, di/dt = -100\text{ A}/\mu\text{s}, V_{DS} = 30\text{ V}$		80	ns

Note: 1. MOSFET chip capability
2. Intrinsic diode capability
3. Pulse test, $t \leq 300\ \mu\text{s}$, duty cycle $d \leq 2\%$

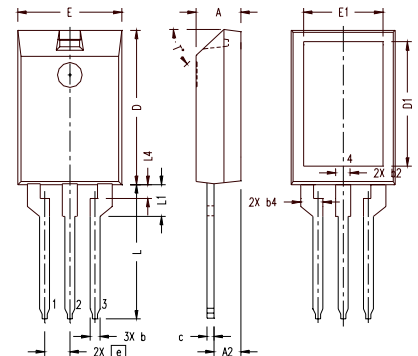ISOPLUS220 OUTLINE


SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.157	.197	4.00	5.00
A2	.098	.118	2.50	3.00
b	.035	.051	0.90	1.30
b2	.049	.065	1.25	1.65
b4	.093	.100	2.35	2.55
c	.028	.039	0.70	1.00
D	.591	.630	15.00	16.00
D1	.472	.512	12.00	13.00
E	.394	.433	10.00	11.00
E1	.295	.335	7.50	8.50
e	.100	BASIC	2.55	BASIC
L	.512	.571	13.00	14.50
L1	.118	.138	3.00	3.50
L4	.039	.059	1.00	1.50
T*			42.5*	47.5*

Note: All terminals are solder plated.
1 - Gate
2 - Drain
3 - Source

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETS and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715
4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025