

Chip Inductors—0805CS Series (2012)

These ultra-compact inductors provide exceptional Q values, even at high frequencies. They have a ceramic body and wire wound construction to provide the highest SRFs available in 0805 size.

Coilcraft **Designer's Kit C103** contains samples of all 5% inductance tolerance parts. Kits with 2% tolerance are also available. To order, contact Coilcraft.

Part number ¹	Inductance ² (nH)	Percent tolerance ³	Q min ⁴	SRF min ⁵ (MHz)	DCR max ⁶ (Ohms)	I _{DC} max ⁷ (mA)	Color code
0805CS-020X _ B _	2.8 @ 250 MHz	20,10,5	80 @ 1500 MHz	7900	.06	800	Gray
0805CS-3N0X _ B _	3.0 @ 250 MHz	20,10,5	65 @ 1500 MHz	7900	.06	800	White
0805CS-030X _ B _	3.3 @ 250 MHz	20,10,5	50 @ 1500 MHz	7900	.08	600	Black
0805CS-050X _ B _	5.6 @ 250 MHz	20,10,5	65 @ 1000 MHz	5500	.08	600	Orange
0805CS-060X _ B _	6.8 @ 250 MHz	20,10,5	50 @ 1000 MHz	5500	.11	600	Brown
0805CS-070X _ B _	7.5 @ 250 MHz	20,10,5	50 @ 1000 MHz	4500	.14	600	Green
0805CS-080X _ B _	8.2 @ 250 MHz	20,10,5,2	50 @ 1000 MHz	4700	.12	600	Red
0805CS-100X _ B _	10 @ 250 MHz	20,10,5,2	60 @ 500 MHz	4200	.10	600	Blue
0805CS-120X _ B _	12 @ 250 MHz	20,10,5,2	50 @ 500 MHz	4000	.15	600	Orange
0805CS-150X _ B _	15 @ 250 MHz	20,10,5,2	50 @ 500 MHz	3400	.17	600	Yellow
0805CS-180X _ B _	18 @ 250 MHz	20,10,5,2	50 @ 500 MHz	3300	.20	600	Green
0805CS-220X _ B _	22 @ 250 MHz	20,10,5,2	55 @ 500 MHz	2600	.22	500	Blue
0805CS-240X _ B _	24 @ 250 MHz	20,10,5,2	50 @ 500 MHz	2000	.22	500	Gray
0805CS-270X _ B _	27 @ 250 MHz	20,10,5,2	55 @ 500 MHz	2500	.25	500	Violet
0805CS-330X _ B _	33 @ 250 MHz	20,10,5,2,1	60 @ 500 MHz	2050	.27	500	Gray
0805CS-360X _ B _	36 @ 250 MHz	20,10,5,2,1	55 @ 500 MHz	1700	.27	500	Orange
0805CS-390X _ B _	39 @ 250 MHz	20,10,5,2,1	60 @ 500 MHz	2000	.29	500	White
0805CS-430X _ B _	43 @ 200 MHz	20,10,5,2,1	60 @ 500 MHz	1650	.34	500	Yellow
0805CS-470X _ B _	47 @ 200 MHz	20,10,5,2,1	60 @ 500 MHz	1650	.31	500	Black
0805CS-560X _ B _	56 @ 200 MHz	10,5,2,1	60 @ 500 MHz	1550	.34	500	Brown
0805CS-680X _ B _	68 @ 200 MHz	10,5,2,1	60 @ 500 MHz	1450	.38	500	Red
0805CS-820X _ B _	82 @ 150 MHz	10,5,2,1	65 @ 500 MHz	1300	.42	400	Orange
0805CS-910X _ B _	91 @ 150 MHz	20,10,5,2,1	65 @ 500 MHz	1200	.48	400	Black
0805CS-101X _ B _	100 @ 150 MHz	10,5,2,1	65 @ 500 MHz	1200	.46	400	Yellow
0805CS-111X _ B _	110 @ 150 MHz	20,10,5,2	50 @ 250 MHz	1000	.48	400	Brown
0805CS-121X _ B _	120 @ 150 MHz	10,5,2,1	50 @ 250 MHz	1100	.51	400	Green
0805CS-151X _ B _	150 @ 100 MHz	10,5,2,1	50 @ 250 MHz	920	.56	400	Blue
0805CS-181X _ B _	180 @ 100 MHz	10,5,2,1	50 @ 250 MHz	870	.64	400	Violet
0805CS-221X _ B _	220 @ 100 MHz	10,5,2	50 @ 250 MHz	850	.70	400	Gray
0805CS-241X _ B _	240 @ 100 MHz	20,10,5,2	44 @ 250 MHz	690	1.0	350	Red
0805CS-271X _ B _	270 @ 100 MHz	10,5,2	48 @ 250 MHz	650	1.0	350	White
0805CS-331X _ B _	330 @ 100 MHz	10,5,2	48 @ 250 MHz	600	1.4	310	Black
0805CS-391X _ B _	390 @ 100 MHz	10,5,2	48 @ 250 MHz	560	1.5	290	Brown
0805CS-471X _ B _	470 @ 50 MHz	10,5,2	33 @ 100 MHz	375	1.76	250	Violet
0805CS-561X _ B _	560 @ 25 MHz	10,5,2	23 @ 50 MHz	340	1.90	230	Orange
0805CS-681X _ B _	680 @ 25 MHz	10,5,2	23 @ 50 MHz	188	2.20	190	Green
0805CS-821X _ B _	820 @ 25 MHz	10,5,2	23 @ 50 MHz	215	2.35	180	Blue

1. When ordering, please specify tolerance and packaging codes:

Inductance tolerance code:

Table above shows stock tolerances in bold.
F= ±1%, G= ±2%, J= ±5%, K= ±10%, M= ±20%

0805CS-821X _ B _

Packaging code:

C=7" machine-ready reel EIA RS-481 clear plastic tape. 2000 per reel.

B=Less than full reel Not machine-ready. The carrier tape may not be a single continuous length. To have a leader and trailer added (\$25 charge), use code letter C instead.

D=13" machine-ready reel EIA RS-481 clear plastic tape. Factory order only, not stocked. 7500 per reel.

- Inductance measured using Coilcraft SMD-A fixture in Agilent/HP4286A impedance analyzer with Coilcraft-provided correlation pieces. For recommended test procedures, contact Coilcraft.
- Tolerances in bold are stocked for immediate shipment.
- Q measured using Agilent/HP4291A with Agilent/HP16193 test fixture and on Agilent/HP8753D with Coilcraft SMD-D test fixture.
- SRF measured using Agilent/HP8720D network analyzer and Coilcraft SMD-D test fixture.
- DCR measured on Cambridge Technology micro-ohmmeter and Coilcraft CCF858 test fixture.
- For 15° C rise.
- Operating temperature range -40° C to +125° C.
- Electrical specifications at 25° C.
- For environmental data, see "Product Specifications" page (Doc. 121).

COILCRAFT ACCURATE
PRECISION REPEATABLE
MEASUREMENTS
TEST FIXTURES
SEE INDEX

Specifications subject to change without notice. Document 100-1 Revised 3/7/02

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web http://www.coilcraft.com

0805CS Series (2012)


S-Parameter files

ON OUR WEB SITE OR CD



PSpice models

SEE CATALOG, WEB SITE OR CD

TYPICAL Q vs FREQUENCY

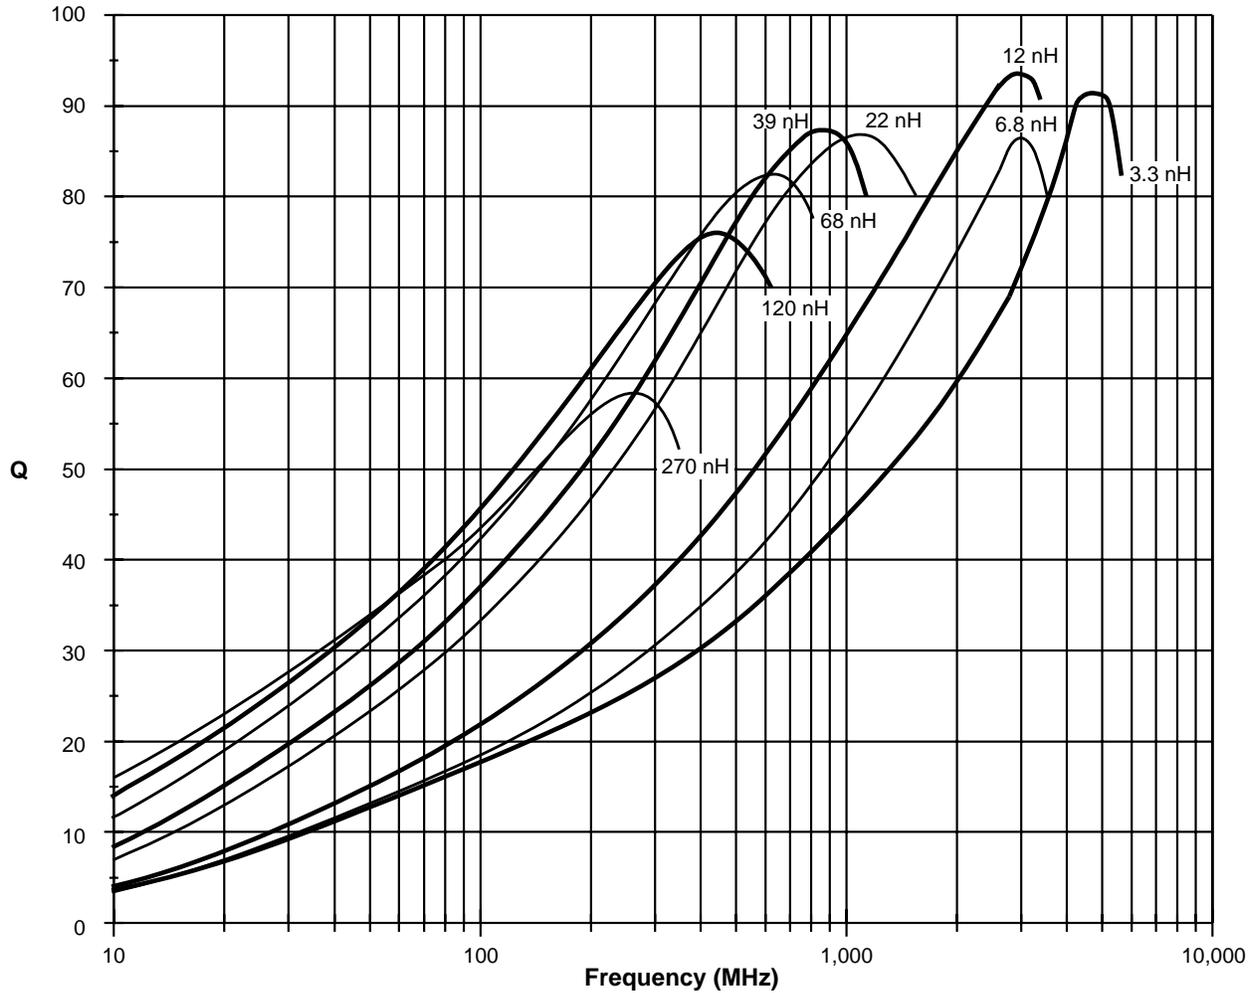

L vs FREQUENCY

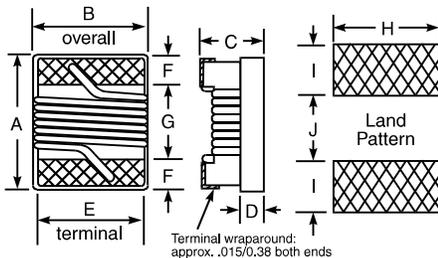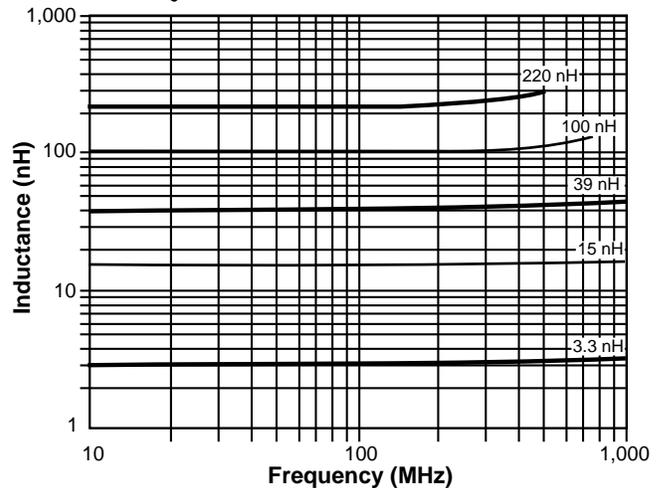

A	B	C	D	E	F	G	H	I	J
Max.	Max.	Max.	Ref.						
.090	.068	.060	.020	.050	.020	.040	.070	.040	.030
2,29	1,73	1,52	0,51	1,27	0,51	1,02	1,78	1,02	0,76

Parts/reel: 7" 2,000; 13" 7,500 Tape width: 8 mm
For packaging data, see "Tape and Reel Specifications" (Document 173).



Specifications subject to change without notice. Document 100-2 Revised 6/27/01

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web http://www.coilcraft.com